Channel to La Quinta

LOG OF BORING NO. 3 ST-8

TYPE: 3" Shelby Tube

LOCATION:

DEPTH FT.	SYMBOL	SAMPLES	DESCRIPTION OF MATERIAL (SURF EL)	BLOWS PER FT.	UNIT DRY WT. LBS./CU.FT.
5			Water		
10					
15					
20					
	CH		Gray Clay, V/Soft L.S. = 18.0	0-2-98	
25			Tan Clay, Stiff L.S. = 23.0	0-10-90	87.9
	CL		L.S. = 18.0 Gray Sandy Clay, V/Stiff	~~0-42-58~~	101.9
30	SM		Gray Silty Sand, V/Dense L.S. = 0.0	56 ~~0-73-27~~	109.5
				2-17-83	109.5
35	CL		L.S. = 8.0	0-29-71	113.3 111.4
40			Tan Sandy Clay, V/Stiff to Hard W/Cal Nod & Sandstone Nod Sandy 32'- to 42'	0-14-86	107.7 116.5 105.2
45					103.7
	ML		L.S. = 2.0 Gray Sandy Silt, V/Dense	0-47-53	107.7
50				43	

COMPLETION DEPTH 52.0

DATE 20 Dec 62

DEPTH TO WATER IN BORING

DATE

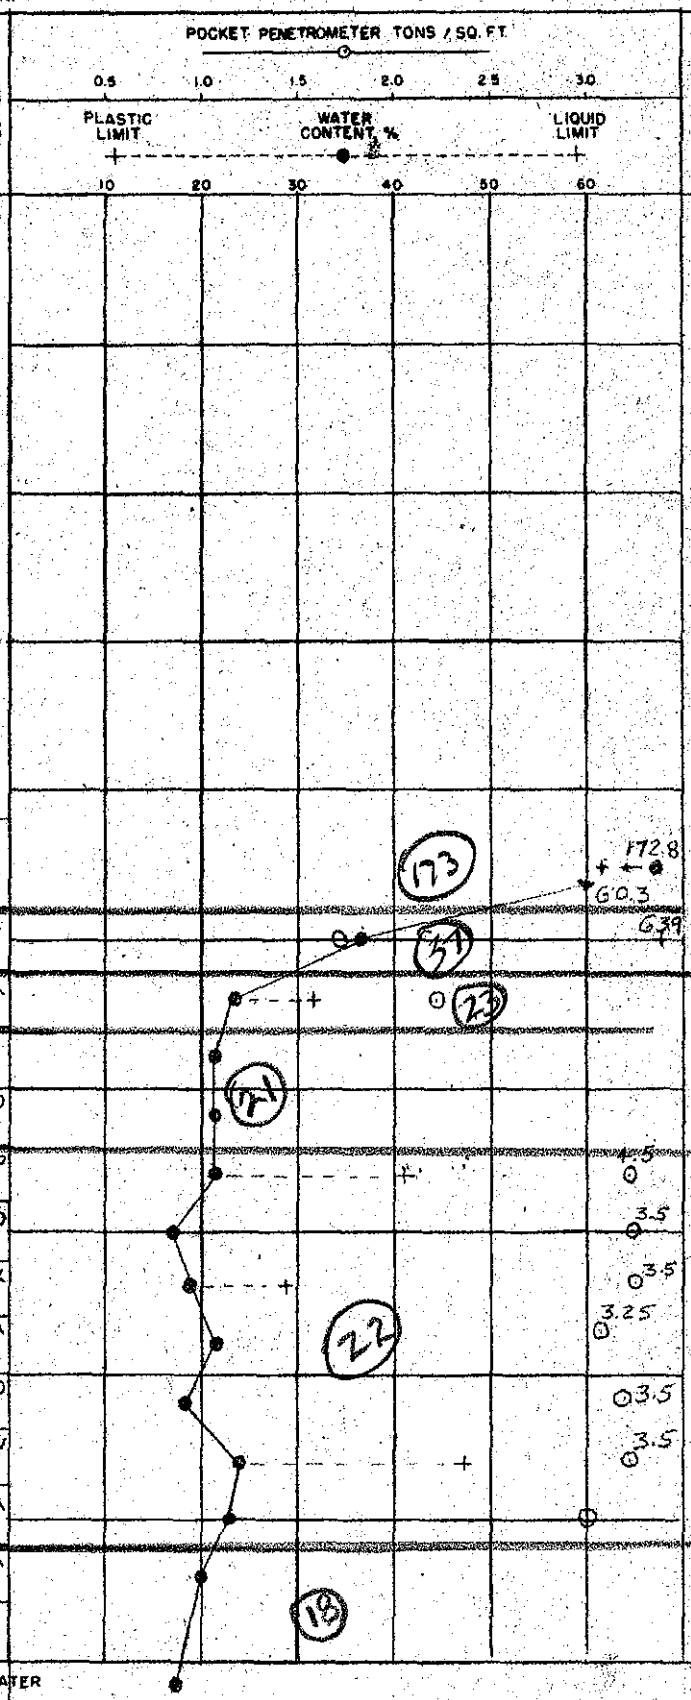

SWN 266(C)
22 AUG 62