

Client: United States Army Corps of Engineers

Project: Colorado River to Matagorda Bay; Contract DACW64-03-D-0008; Delivery Order 0037


[illegible]

Our letters and reports are for the exclusive use of the CLIENT. This document shall not be reproduced, except in full, without our prior written approval.

TOLUNAY-WONG ENGINEERS, INC.



Particle Size Distribution Report (ASTM D 422)

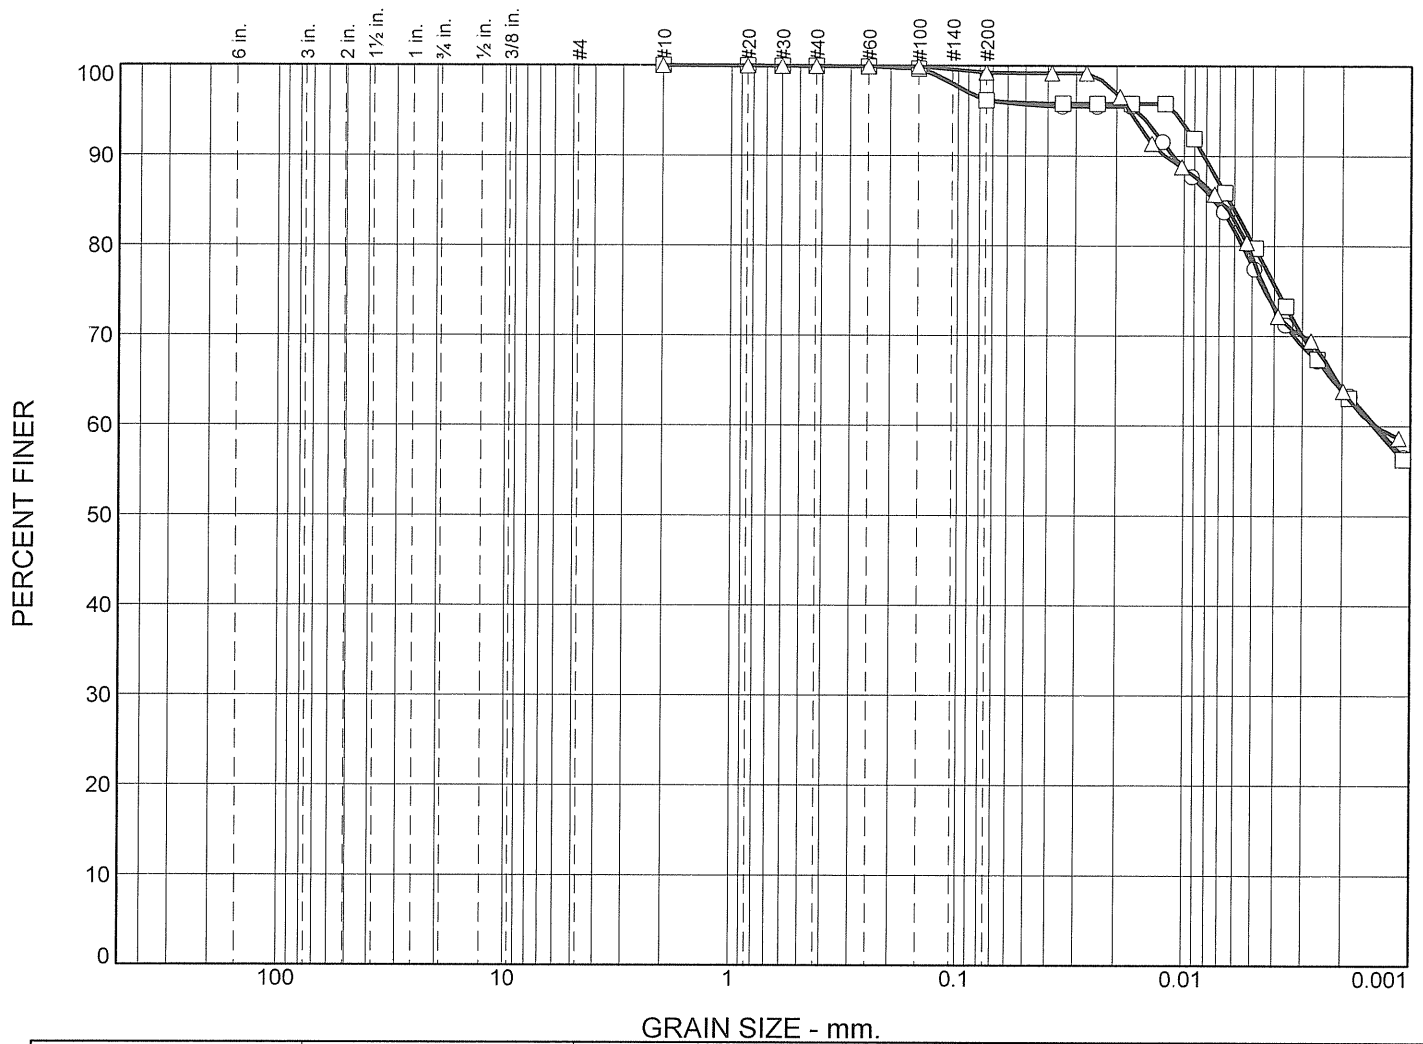

GRAIN SIZE - mm.

	% +3"	% Gravel		% Sand			% Fines	
		Coarse	Fine	Coarse	Medium	Fine	Silt	Clay
○	0.0	0.0	0.0	0.0	0.1	3.7	31.9	64.3
□	0.0	0.0	0.0	0.0	0.1	3.7	32.3	63.9
△	0.0	0.0	0.0	0.0	0.1	0.6	35.3	64.0

SOIL DATA

SYMBOL	SOURCE	SAMPLE NO.	DEPTH (ft.)	Material Description	USCS
○	Grab Samples	A-73	Surface		CH
□	Grab Samples	A-74	Surface		CH
△	Grab Samples	A-75	Surface		CH

**Tolunay-Wong
Engineers, Inc.
Houston, Texas**

Client: United States Army Corps of Engineers

Project: Colorado River to Matagorda Bay

Contract DACW64-03-D-0008; Delivery Order 0037

Project No.: 03-859-037