

Client: United States Army Corps of Engineers

Project: Colorado River to Matagorda Bay; Contract DACW64-03-D-0008; Delivery Order 0037


[illegible]

Our letters and reports are for the exclusive use of the CLIENT. This document shall not be reproduced, except in full, without our prior written approval.

TOLUNAY-WONG ENGINEERS, INC.



Particle Size Distribution Report (ASTM D 422)

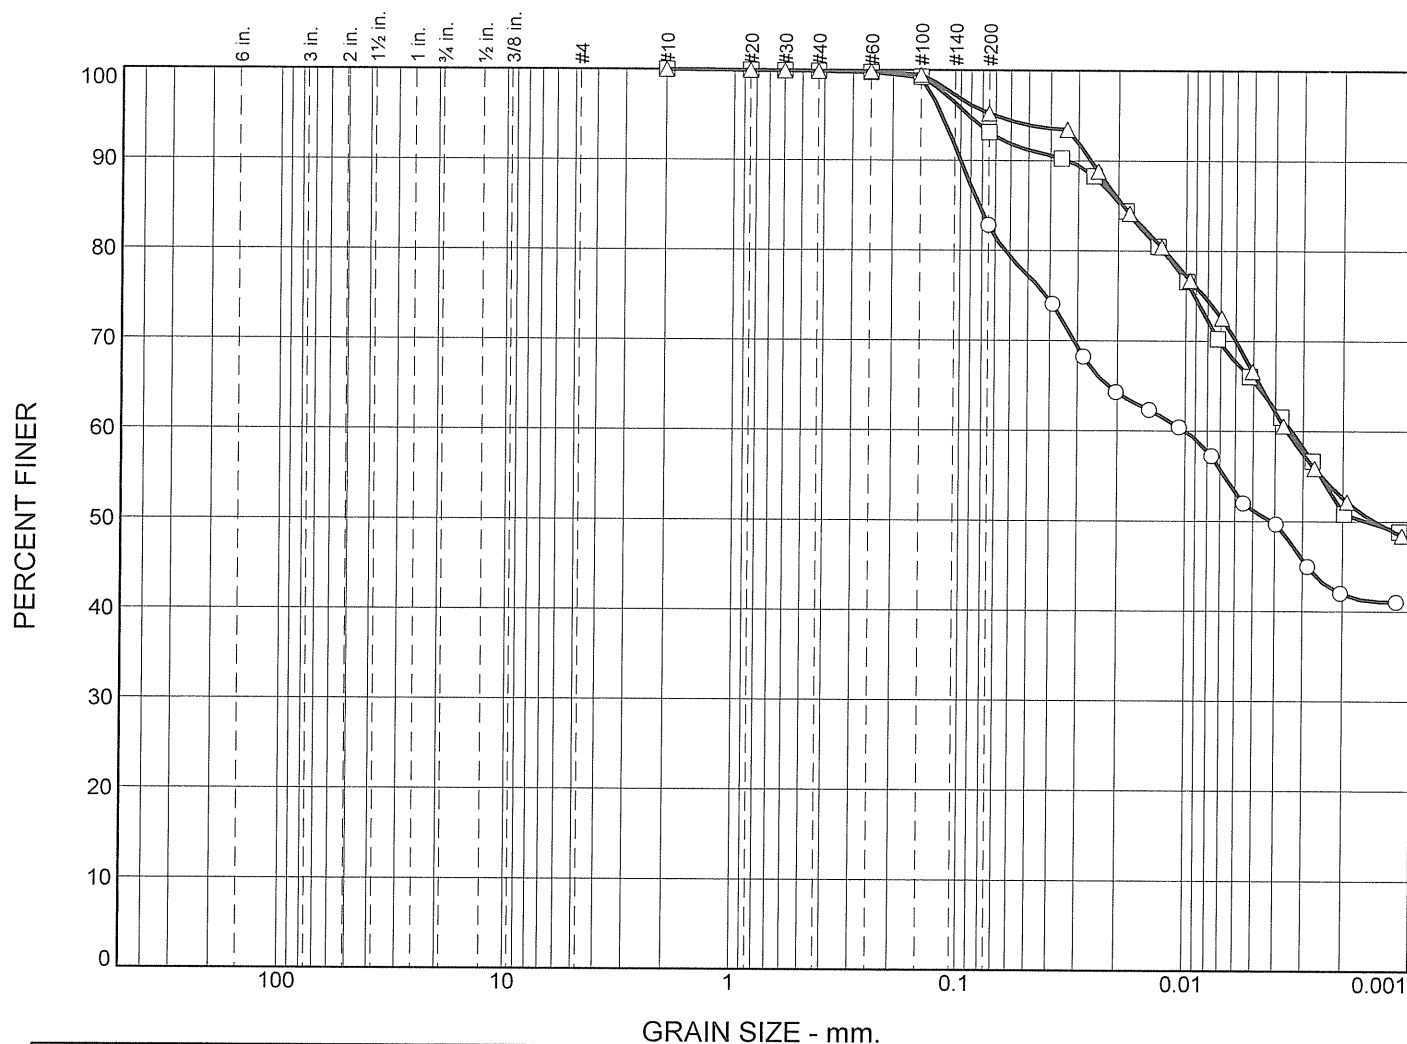

	% +3"	% Gravel		% Sand			% Fines	
		Coarse	Fine	Coarse	Medium	Fine	Silt	Clay
○	0.0	0.0	0.0	0.0	0.1	17.1	40.9	41.9
□	0.0	0.0	0.0	0.0	0.1	6.8	42.1	51.0
△	0.0	0.0	0.0	0.0	0.1	4.6	42.7	52.6

SOIL DATA					
SYMBOL	SOURCE	SAMPLE NO.	DEPTH (ft.)	Material Description	USCS
○	Grab Samples	A-64	Surface		CH
□	Grab Samples	A-65	Surface		CH
△	Grab Samples	A-66	Surface		CH

**Tolunay-Wong
Engineers, Inc.
Houston, Texas**

Client: United States Army Corps of Engineers
Project: Colorado River to Matagorda Bay
 Contract DACW64-03-D-0008; Delivery Order 0037
Project No.: 03-859-037