

28 Jan 1965

PROJECT: *Galveston Hurricane*

LOCATION: and Channel

TEST DATA SUMMARY



BORING NO. 357-73

DATE DRILLED 16 Dec. '65

[illegible]

BORING NO. 387-73

DRILLING LOG		DIVISION Southwestern		INSTALLATION Galv Dist, Eng Div		SHEET OF SHEETS	
1. PROJECT Galveston Harbor and Channel				10. SIZE AND TYPE OF BIT			
2. LOCATION (Coordinates or Station) Galveston, Texas				11. DATUM FOR ELEVATION SHOWN (TBM or MSL)			
3. DRILLING AGENCY U. S. Army Corps of Engineers				12. MANUFACTURER'S DESIGNATION OF DRILL			
4. HOLE NO. (As shown on drawing title and file number) 3ST-73				13. TOTAL NO. OF OVERBURDEN SAMPLES TAKEN		DISTURBED UNDISTURBED 13 Cont	
5. NAME OF DRILLER Curtis				14. TOTAL NUMBER CORE BOXES			
6. DIRECTION OF HOLE ☐ VERTICAL ☐ INCLINED _____ DEG. FROM VERT.				15. ELEVATION GROUND WATER			
7. THICKNESS OF OVERBURDEN				16. DATE HOLE		STARTED 16 Dec COMPLETED 16 Dec 1965	
8. DEPTH DRILLED INTO ROCK				17. ELEVATION TOP OF HOLE			
9. TOTAL DEPTH OF HOLE 52.5				18. TOTAL CORE RECOVERY FOR BORING %			
19. SIGNATURE OF INSPECTOR							
ELEVATION a	DEPTH b	LEGEND c	CLASSIFICATION OF MATERIALS (Description) d	% CORE RECOVERY e	BOX OR SAMPLE NO. f	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant) g	
0.0	14.5		Water				
14.5	17.0		Gray sandy clay, moist, v/soft			Cont. 1	0.0
17.0	17.5		Same as above, no recovery				
17.5	20.0		Gray sandy clay, moist, v/soft			Cont. 2	0.0
20.0	22.5		Same as above, no recovery				
22.5	25.0		Gray sandy clay, moist, v/soft			Cont. 3	0.0
25.0	27.5		Gray sandy clay, no recovery				
27.5	30.0		Gray sandy clay, moist, v/soft			Cont. 4	0.0
30.0	32.5		Gray clay w/sand layers, thin v/soft			Cont. 5	0.0
32.5	35.0		Gray clay w/sand layers, thin v/soft			Cont. 6	0.0
35.0	37.5		Gray clay w/sand layers, thin v/soft			Cont. 7	0.0
37.5	40.0		Brown clay w/some sand pockets small, medium			Cont. 8	0.75
40.0	42.5		Brown clay w/cal nods, fine stiff			Cont. 9	1.50
42.5	45.0		Brown clay, stiff			Cont. 10	1.50
45.0	47.5		Brown clay, stiff			Cont. 11	1.50
47.5	50.0		Brown clay w/cal nod, fine stiff			Cont. 12	1.50
50.0	52.5		Gray clay, stiff			Cont. 13	1.00
			BOTTOMED				
			Tide +2.5				

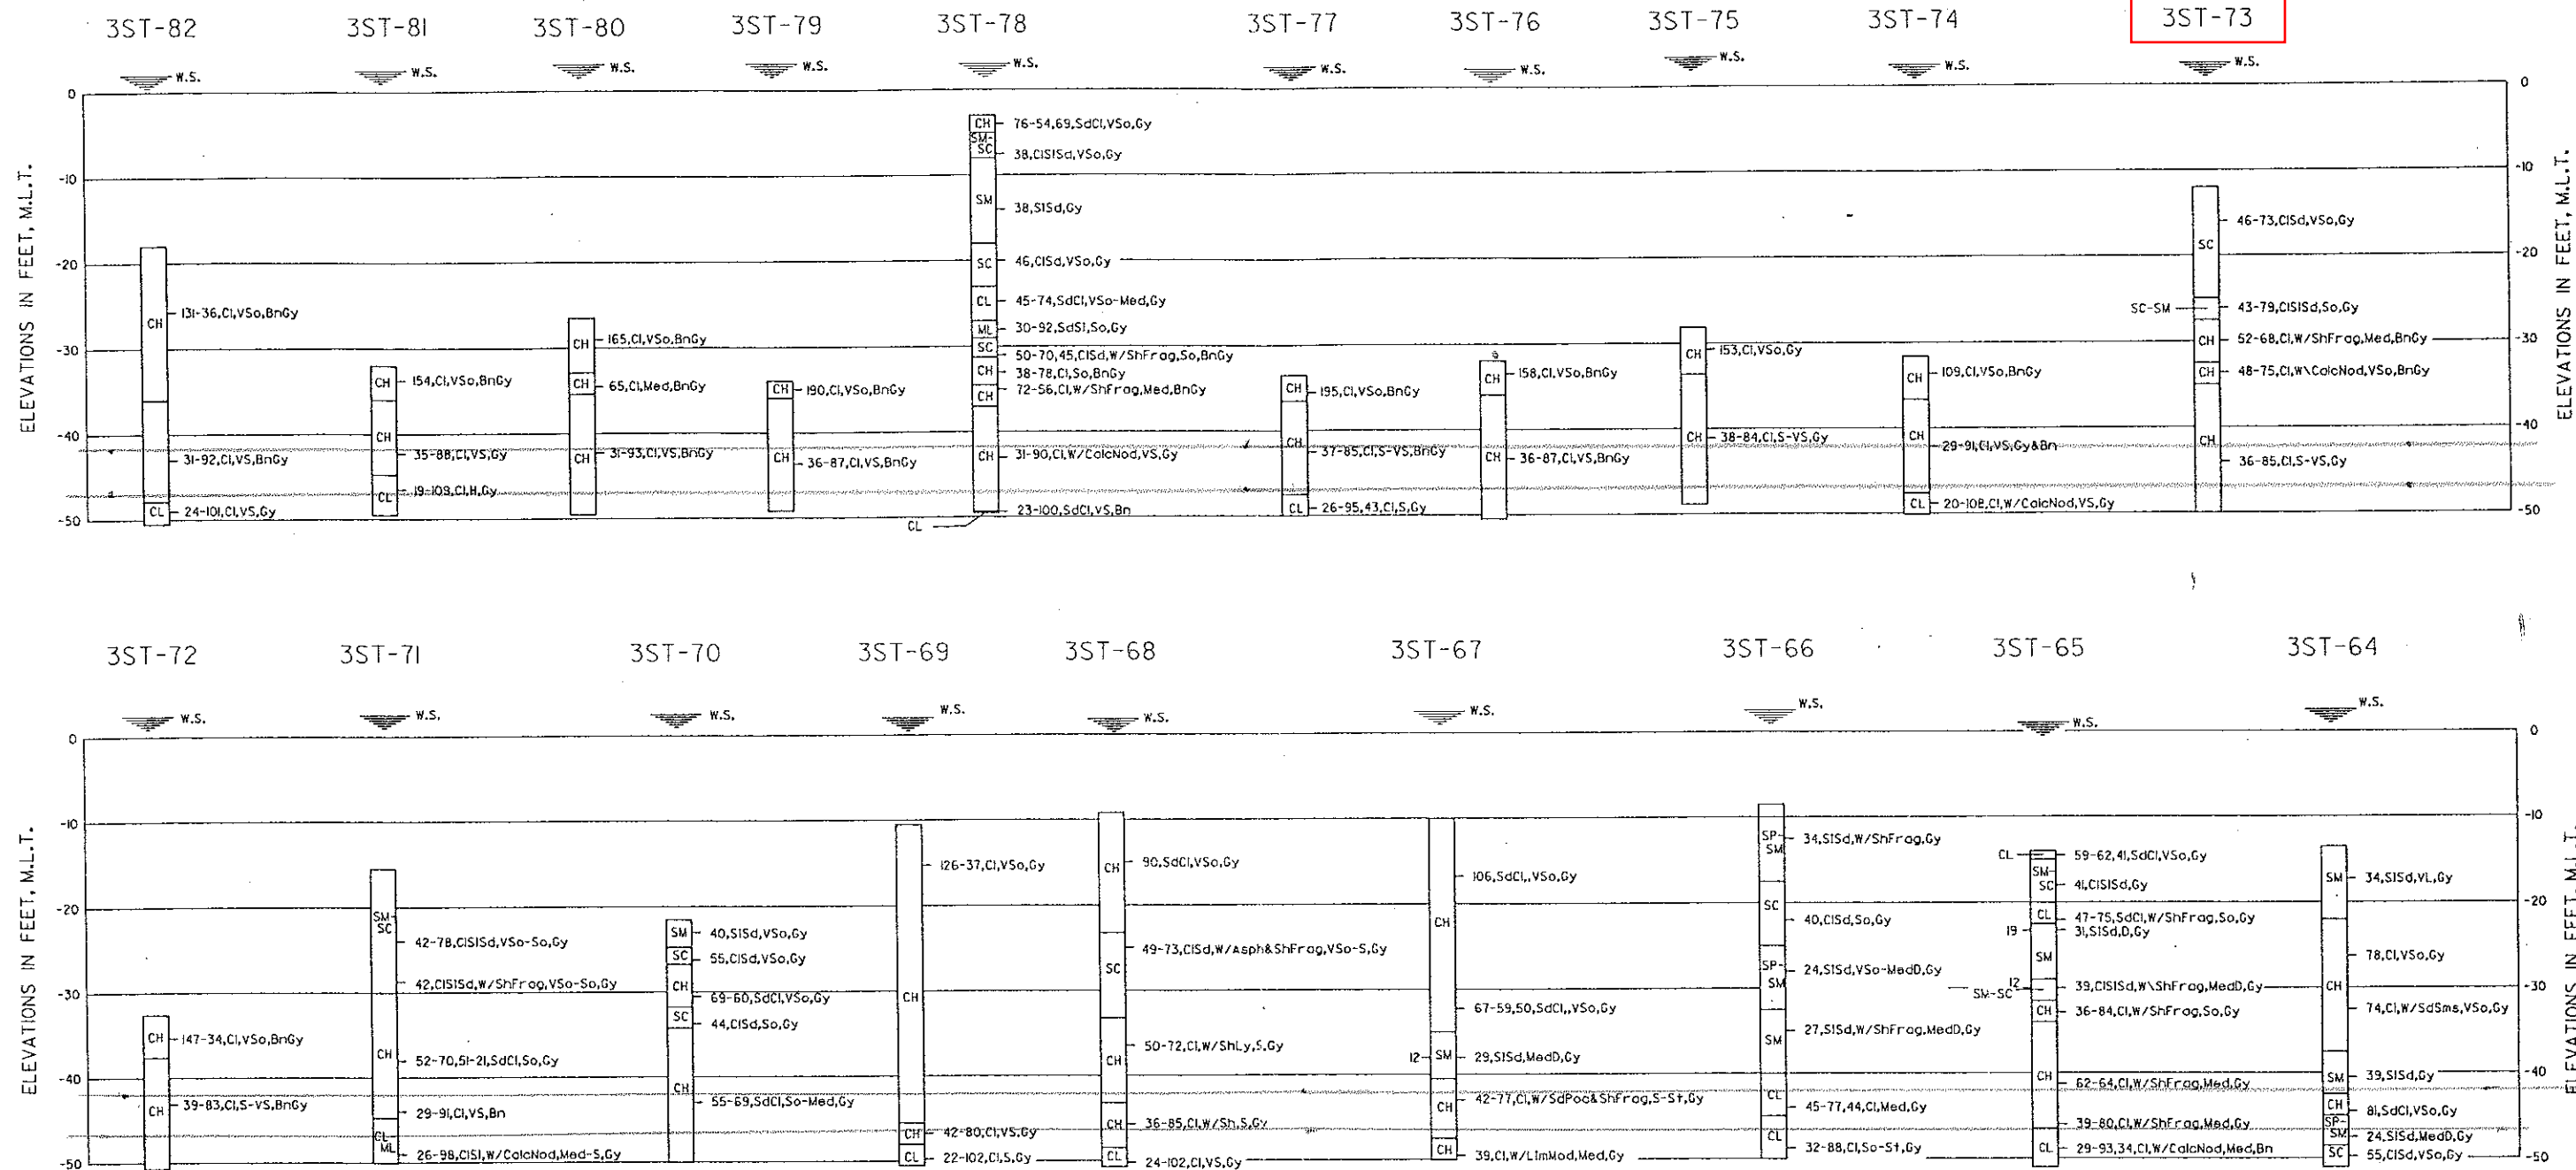

NOTES:

1. SOILS HAVE BEEN CLASSIFIED IN ACCORDANCE WITH MILITARY STANDARD 619B 'UNIFIED SOIL CLASSIFICATION SYSTEM FOR ROADS, AIRFIELDS, EMBANKMENTS AND FOUNDATIONS.' CONSISTENCY OF SOILS SUCH AS SOFT, MEDIUM, HARD, LOOSE, DENSE, ETC., ARE RELATIVE TERMS BASED ON ESTIMATED UNDISTURBED SHEAR STRENGTH OF THE MATERIAL AS DETERMINED BY VISUAL CLASSIFICATION, POCKET PENETROMETER TESTS AND PENETRATION RESISTANCE DURING SAMPLING.
2. FIGURES TO THE RIGHT OF BORING LOGS ARE WATER CONTENTS IN PERCENT OF THE DRY WEIGHT, DRY DENSITY, LIQUID LIMIT, PLASTIC LIMIT, AND BAR LINEAR SHRINKAGE. (MC-UDW), (LL-PL), (B.L.S.) * FIGURES TO THE LEFT OF BORING LOGS ARE BLOWS PER FOOT OF PENETRATION FROM STANDARD PENETRATION TESTING.
3. BORINGS WERE DRILLED USING WET ROTARY DRILLING TECHNIQUES AND UNDISTURBED SAMPLES WERE RECOVERED WITH A 3-INCH DIAMETER THIN WALL SAMPLER WHERE COHESIVE MATERIALS WERE ENCOUNTERED. WHERE COHESIONLESS MATERIALS WERE ENCOUNTERED, DISTURBED SAMPLES WERE TAKEN WITH A SPLIT SPOON SAMPLER DURING PERFORMANCE OF STANDARD PENETRATION TESTING.

VISUAL CLASSIFICATIONS

Bn Brownish
Calc Calcareous
Cl Clayey
D Dense
Frag Fragmental
Gy Grayish
H Hard
L Loose
Nod Nodules
Med Medium
S Stiff
Sd Sandy
Sh Shelly
SI Silty
So Soft
V Very
W With
W.S. Water Surface

LABORATORY CLASSIFICATION

CH INORGANIC CLAYS OF HIGH PLASTICITY, FAT CLAYS.
CL INORGANIC CLAYS OF LOW TO MEDIUM PLASTICITY, LEAN CLAYS.
ML INORGANIC SILTS AND VERY FINE SANDS, WITH SLIGHT PLASTICITY.
SC CLAYEY SANDS, SAND-CLAY MIXTURES.
SM SILTY SANDS, SAND-SILT MIXTURES.
SP POORLY GRADED SANDS OR GRAVELLY SANDS, LITTLE OR NO FINES.

NOTE: BORINGS DRILLED DECEMBER 1965
LOCATIONS OF BORINGS SHOWN ON PLATE FD-38

HOUSTON-GALVESTON NAVIGATION CHANNELS, TEXAS

GALVESTON CHANNEL BORING LOGS

U.S. ARMY ENGINEER DISTRICT, GALVESTON, TEXAS

TO ACCOMPANY ENGINEERING SUPPLEMENT
TO LIMITED REEVALUATION REPORT
DATED: X