


SABINE PASS ANCHORAGE BASIN

LOG OF BORING NO. 35T-15

TYPE:

3" Shelby Tube

LOCATION:

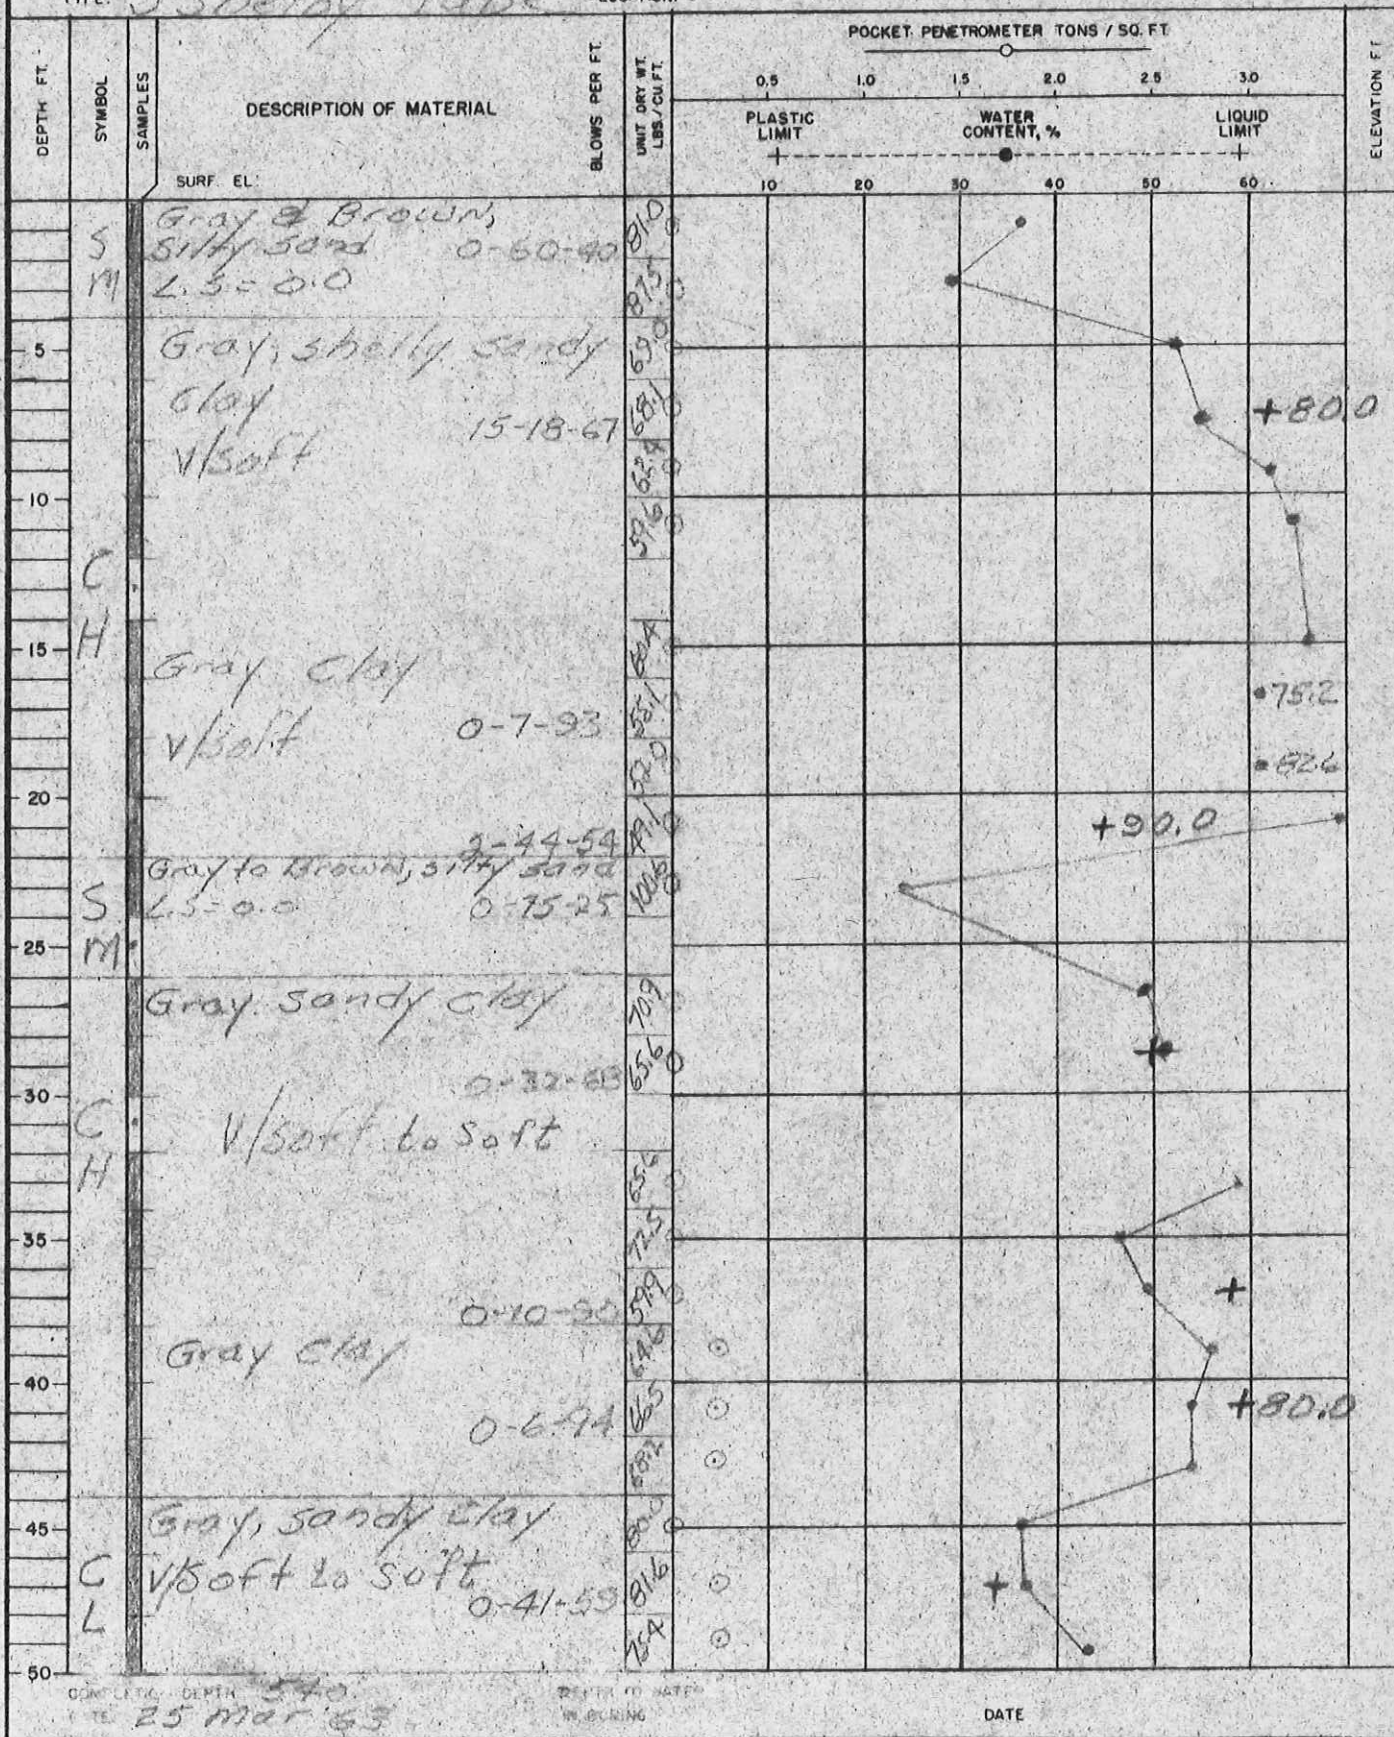

SAITING PASS

ANCHOR PILE BORED

LOG OF BORING NO.

35T-15

TYPE:

3" Shelby Tube

LOCATION:

DEPTH FT.	SYMBOL	SAMPLES	DESCRIPTION OF MATERIAL	BLOWS PER FT.	UNIT DRY WT. LBS./CU. FT.	POCKET PENETROMETER TONS / SQ. FT.			ELEVATION FT.			
						0.5	1.0	1.5		2.0	2.5	3.0
						PLASTIC LIMIT	WATER CONTENT, %	LIQUID LIMIT				
			SURF. EL:									
	O		Gray, Organic Clay									
	H		medium									
			0-4-96									
5												
10												
15												
20												
25												
30												
35												
40												
45												
50												

+140.0

77.7

COMPLETION DEPTH
DATE

DEPTH TO WATER
IN BORING

DATE

DEPARTMENT OF THE ARMY DIVISION _____ INSTALLATION _____ DRILLING LOG			1. PROJECT Anchorage Basin, Sabine Pass		SHEET _____ OF _____	
			2. LOCATION (Coordinates or Station)			
4. HOLE NO. (As shown on drawing title and file No.)			3. DRILLING AGENCY			
5. NAME OF DRILLER			6. DIRECTION OF HOLE			
☐ VERTICAL ☐ INCLINED			DEGREES WITH VERTICAL		7. THICKNESS OF OVERBURDEN	
10. SIZE AND TYPE OF BIT			11. DATUM FOR ELEVATION SHOWN (TBM or MSL)		8. DEPTH DRILLED INTO ROCK	
13. TOTAL NO. OF OVERBURDEN SAMPLES TAKEN			14. TOTAL NO. CORE BOXES		9. TOTAL DEPTH OF HOLE	
DISTURBED			UNDISTURBED		15. ELEV. GROUND WATER	
17. ELEV. TOP OF HOLE			18. TOTAL CORE RECOVERY FOR BORING (%)		16. DATE HOLE	
19. SIGNATURE OF INSPECTOR			STARTED _____ COMPLETED _____			
ELEVATION	DEPTH	LEGEND	CLASSIFICATION OF MATERIALS (Description)		% CORE RECOVERY	BOX OR SAMPLE NO.
REMARKS (Drilling time, water loss, depth of weathering, etc., if significant)						
50.0	52.0		Gray clay w/seams fine sand med			
						Cont. 22 0.50
52.0	54.0		Same as above, med			
						Cont. 23 0.50
			Bottomed in above			
			Water Table - none recorded			

DEPARTMENT OF THE ARMY DIVISION <u>Southwestern</u> INSTALLATION <u>Galv Dist, Eng Div</u>				1. PROJECT		SHEET OF	
				Anchorage Basin, Sabine Pass			
DRILLING LOG 4. HOLE NO. (As shown on drawing title and file No.) 3ST-15				2. LOCATION (Coordinates or Station)			
				Elev. 2.9			
				3. DRILLING AGENCY			
				U. S. Army Corps of Engineers			
				5. NAME OF DRILLER			
				Eck			
6. DIRECTION OF HOLE				7. THICKNESS OF OVERBURDEN		8. DEPTH DRILLED INTO ROCK	
☐ VERTICAL		☐ INCLINED		DEGREES WITH VERTICAL		9. TOTAL DEPTH OF HOLE 54.0	
10. SIZE AND TYPE OF BIT		11. DATUM FOR ELEVATION SHOWN		12. MANUFACTURER'S DESIGNATION OF DRILL			
Shelby Tube - 3"		(TBM or MSL)					
13. TOTAL NO. OF OVERBURDEN SAMPLES TAKEN		14. TOTAL NO. CORE BOXES		15. ELEV. GROUND WATER		16. DATE HOLE	
DISTURBED 1 Jar		UNDISTURBED 23 Cont				STARTED 25 Mar COMPLETED 25 March 1963	
17. ELEV. TOP OF HOLE		18. TOTAL CORE RECOVERY FOR BORING (%)		19. SIGNATURE OF INSPECTOR			
ELEVATION	DEPTH	LEGEND	CLASSIFICATION OF MATERIALS (Description)	% CORE RECOVERY	BOX OR SAMPLE NO.	REMARKS (Drilling time, water loss, depth of weathering, etc., if significant)	
0.0	2.0		Gray and brown sandy clay v/soft			Cont. 1	
2.0	4.0		Same as above, v/soft			Cont. 2	
4.0	6.0		Gray clay w/shell frag v/soft			Cont. 3	
6.0	8.0		Gray clay w/shell, v/soft			Cont. 4	
8.0	10.0		Same as above, v/soft			Cont. 5	
10.0	12.0		Gray silty clay, v/soft			Cont. 6	
12.0	14.0		Same as above,			No recovery	
14.0	16.0		Gray silty clay, w/shell frag, v/soft			Cont. 7	
16.0	18.0		Gray clay w/seams and pockets fine sand, v/soft			Cont. 8	
18.0	20.0		Same as above, v/soft			Cont. 9	
20.0	22.0		Same as above, v/soft			Cont. 10	
22.0	24.0		Gray and brown clayey silty fine sand, v/soft			Cont. 11	
24.0	26.0		Same as below			No recovery	
26.0	28.0		Gray clay and shell, v/soft			Jar 1	
28.0	30.0		Gray clay w/fine sand, v/soft			Cont. 12	
30.0	32.0		Same as above			No recovery	
32.0	34.0		Gray clay, v/soft			Cont. 13	
34.0	36.0		Gray clay w/sand pockets and shell frag, v/soft			Cont. 14	
36.0	38.0		Same as above, soft			Cont. 15	
38.0	40.0		Gray clay ^w /seams, fine sand and shell frag, soft			Cont. 16 0.25	
40.0	42.0		Gray clay w/shell frag, soft			Cont. 17 0.25	
42.0	44.0		Gray clay, soft			Cont. 18 0.25	
44.0	46.0		Gray clay slightly silty, v/soft			Cont. 19	
46.0	48.0		Same as above, soft			Cont. 20 0.25	
48.0	50.0		Gray clay soft			Cont. 21 0.25	

continued on next page