

October 16, 2006
 Attn.: Mr. Josh Carter
 RETL Job No.: G106505

PROPOSED SAN LUIS PASS PROJECT PHASE 2
 West Galveston Bay
 Freeport, Texas

	BORING C10		BORING C11		
SIEVE SIZE	2.5'-5'	7.5'-10'	0-2.5'	5'-7.5'	10'-12.5'
#10	100	100	100	100	99
#20	100	100	100	100	98
#40	100	100	100	100	98
#60	100	100	99	99	97
#70	99	99	99	98	96
#80	98	98	97	95	92
#100	72	75	73	70	61
#120	36	43	37	32	23
#140	15	25	21	17	12
#200	3.5	9.4	8.5	3.7	3.6
#230	2.7	7.0	7.2	2.8	3.2
Color	2.5Y 2.5/1	2.5Y 5/1	2.5Y 3/2	2.5Y 5/1	2.5Y 5/3
Description	Black	Gray	Vry. Dk. Gray Brown	Gray	Lt Olive Brown

	BORING C12		BORING C13	
SIEVE SIZE	2.5'-5'	7.5'-10'	0-2.5'	5'-7.5'
#10	100	97	100	100
#20	100	94	100	100
#40	99	92	99	100
#60	99	89	99	100
#70	97	83	98	99
#80	91	74	91	98
#100	52	40	41	73
#120	20	19	15	42
#140	11	11	8	26
#200	4.6	4.2	3.9	11.7
#230	4.2	3.9	3.5	9.3
Color	2.5Y 4/1	2.5Y 5/2	2.5Y 3/1	2.5Y 4/1
Description	Dk. Gray	Gray Brown	Vry. Drk. Gray	Dk. Gray

LOG OF BORING C-11

SHEET 1 of 1




Rock Engineering & Testing Laboratory
4910 Neptune Street
Corpus Christi, TX 78405
Telephone: 361-883-4555
Fax: 361-883-4711

CLIENT: Coast and Harbor Engineering, Inc.
PROJECT: Proposed San Luis Pass Project Phase 2
LOCATION: W. Galveston Bay; Freeport, Texas
NUMBER: G106505

DATE(S) DRILLED: 9/2206 - 9/2206

FIELD DATA					LABORATORY DATA							DRILLING METHOD(S): Disturbed Samples
SOIL SYMBOL	DEPTH (FT)	SAMPLE NUMBER	SAMPLES	N: BLOWS/FT P: TONS/SQ FT T: TONS/SQ FT PERCENT RECOVERY/ ROCK QUALITY DESIGNATION	MOISTURE CONTENT (%)	ATTEBERG LIMITS			DRY DENSITY POUNDS/CU FT	COMPRESSIVE STRENGTH (TONS/SQ FT)	MINUS NO. 200 SIEVE (%)	GROUNDWATER INFORMATION: Boring Performed in water aproximately 4 to 5 feet in depth.
						LIQUID LIMIT LL	PLASTIC LIMIT PL	PLASTICITY INDEX PI				SURFACE ELEVATION: N/A
												DESCRIPTION OF STRATUM
	1	UNDIS S-1									9	<u>POORLY GRADED SAND</u> , 2.5Y 3/2 very dark gray brown. Same as above, 2.5Y 5/1 gray. Same as above, 2.5Y 5/1 gray. <u>POORLY GRADED SAND</u> , 2.5Y 4/1 dark gray. Same as above, 2.5Y 5/3 light olive brown. Same as above, 2.5Y 4/1 dark gray. Boring terminated at a depth of 15' below the bay bottom.
	2											
	3											
	4	UNDIS S-2										
	5											
	6	UNDIS S-3									4	
	7											
	8											
	9	UNDIS S-4										
	10											
	11	UNDIS S-5									4	
	12											
	13											
	14	UNDIS S-6										
	15											
N - STANDARD PENETRATION TEST RESISTANCE P - POCKET PENETROMETER RESISTANCE T - POCKET TORVANE SHEAR STRENGTH												REMARKS: Soil Sampling performed by RETL at N29.1106 deg W95.1341 deg.


LOG OF BORING G106505.GPJ ROCK_ETL_GDT 10/16/05

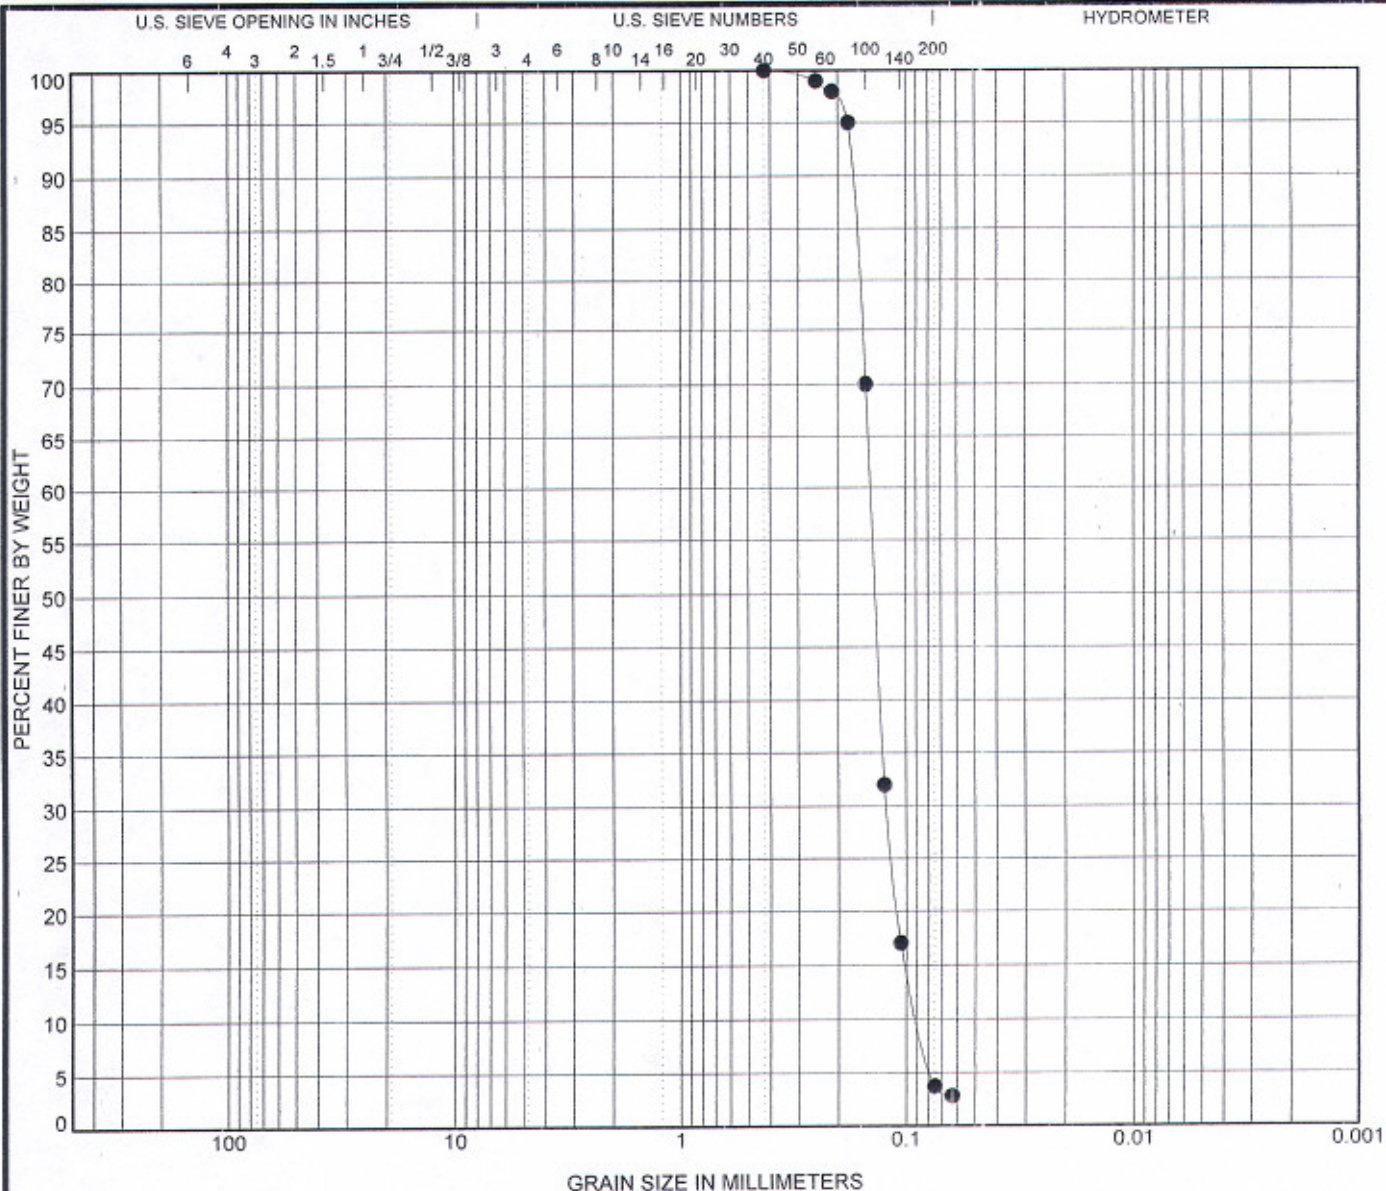

COBBLES	GRAVEL		SAND			SILT OR CLAY
	coarse	fine	coarse	medium	fine	

Specimen Identification	Classification	LL	PL	PI	Cc	Cu
● C-11 5.0	POORLY GRADED SAND(SP)				1.18	1.62


Specimen Identification	D100	D60	D30	D10	%Gravel	%Sand	%Silt	%Clay
● C-11 5.0	0.425	0.143	0.122	0.088	0.0	96.3	3.7	



Rock Engineering & Testing Laboratory
 4910 Neptune Street
 Corpus Christi, TX 78405
 Telephone: 361-883-4555
 Fax: 361-883-4711

GRAIN SIZE DISTRIBUTION

Project: Proposed San Luis Pass Project Phase 2
 Location: W. Galveston Bay, Freeport, Texas
 Number: G106505

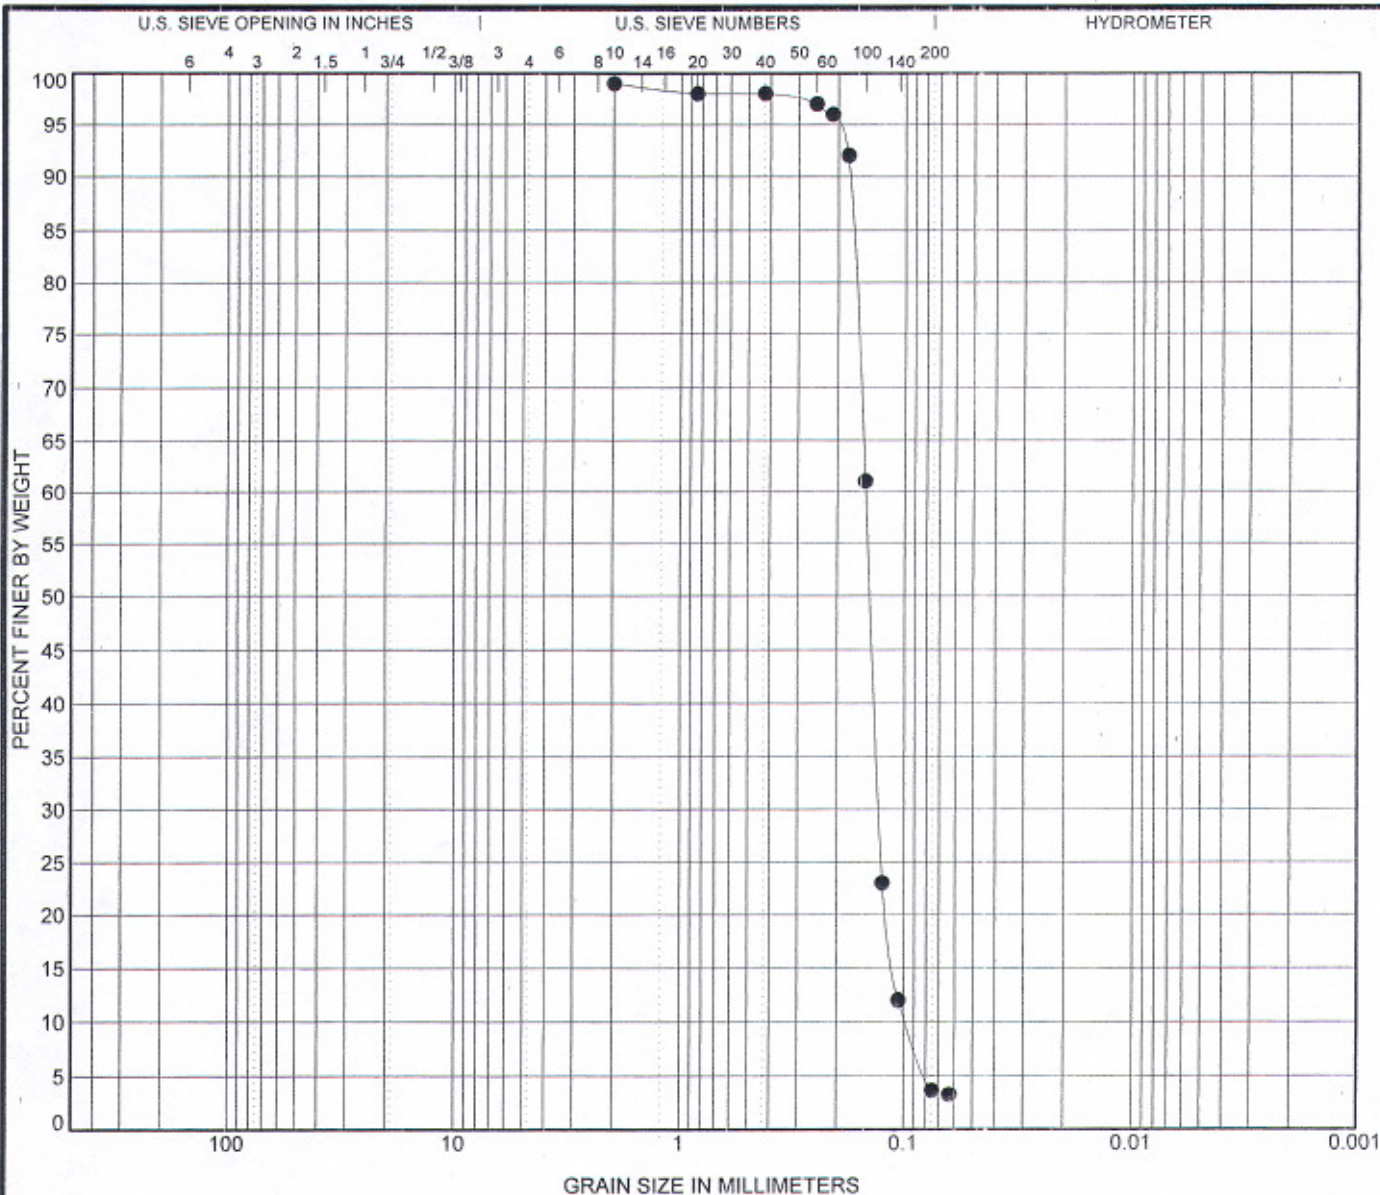

COBBLES	GRAVEL		SAND			SILT OR CLAY
	coarse	fine	coarse	medium	fine	

Specimen Identification	Classification	LL	PL	PI	Cc	Cu
● C-11 10.0	POORLY GRADED SAND(SP)				1.15	1.53

Specimen Identification	D100	D60	D30	D10	%Gravel	%Sand	%Silt	%Clay
● C-11 10.0	2	0.149	0.129	0.098	0.0	95.4	3.6	



Rock Engineering & Testing Laboratory
4910 Neptune Street
Corpus Christi, TX 78405
Telephone: 361-883-4555
Fax: 361-883-4711

GRAIN SIZE DISTRIBUTION

Project: Proposed San Luis Pass Project Phase 2

Location: W. Galveston Bay; Freeport, Texas

Number: G106505