



- Geotechnical Engineering
- Construction Materials Testing

PROJECT NAME: Anchorage Basin Sand Source Investigation
CLIENT: HDR Engineering, Inc.
BORING ID.: AA-29
DESCRIPTION: Anchorage Basin Borrow Source Area


PERCENT SHELL BY WEIGHT (BASED ON #10 SIEVE)			
-30' to -31' NAVD	-31' to -32' NAVD	-34' to -35' NAVD	-37' to -38' NAVD
N/A	0.01	0.01	N/A

ASTM MESH	% FINER BY WEIGHT AFTER REMOVING SHELL			
	-30' to -31' NAVD	-31' to -32' NAVD	-34' to -35' NAVD	-37' to -38' NAVD
#10	N/A	100.00	100.00	N/A
#18	N/A	99.94	99.96	N/A
#35	N/A	99.91	99.95	N/A
#60	N/A	99.70	99.84	N/A
#70	N/A	99.36	99.73	N/A
#100	N/A	89.64	94.08	N/A
#120	N/A	55.52	70.38	N/A
#170	N/A	31.73	49.10	N/A
#200	47.10	26.14	43.43	23.90
STATISTICS (EXCLUDING SHELL)				
MEDIAN GRAIN SIZE (mm)	N/A	0.13	0.09	N/A
MEAN GRAIN SIZE (mm)	N/A	N/A	N/A	N/A
SORTING (σ)	N/A	N/A	N/A	N/A

*AA-29; -30' to -31' NAVD and -37' to -38' NAVD were only passed through the -#200 sieve.

*The -#10 material was utilized as the total sample for Grain Size Distribution Curve calculations.

U.S. GRAIN SIZE G109112 PROP. ANCHORAGE BASIN SAND SOURCE.GPJ US LAB.GDT 4/13/09

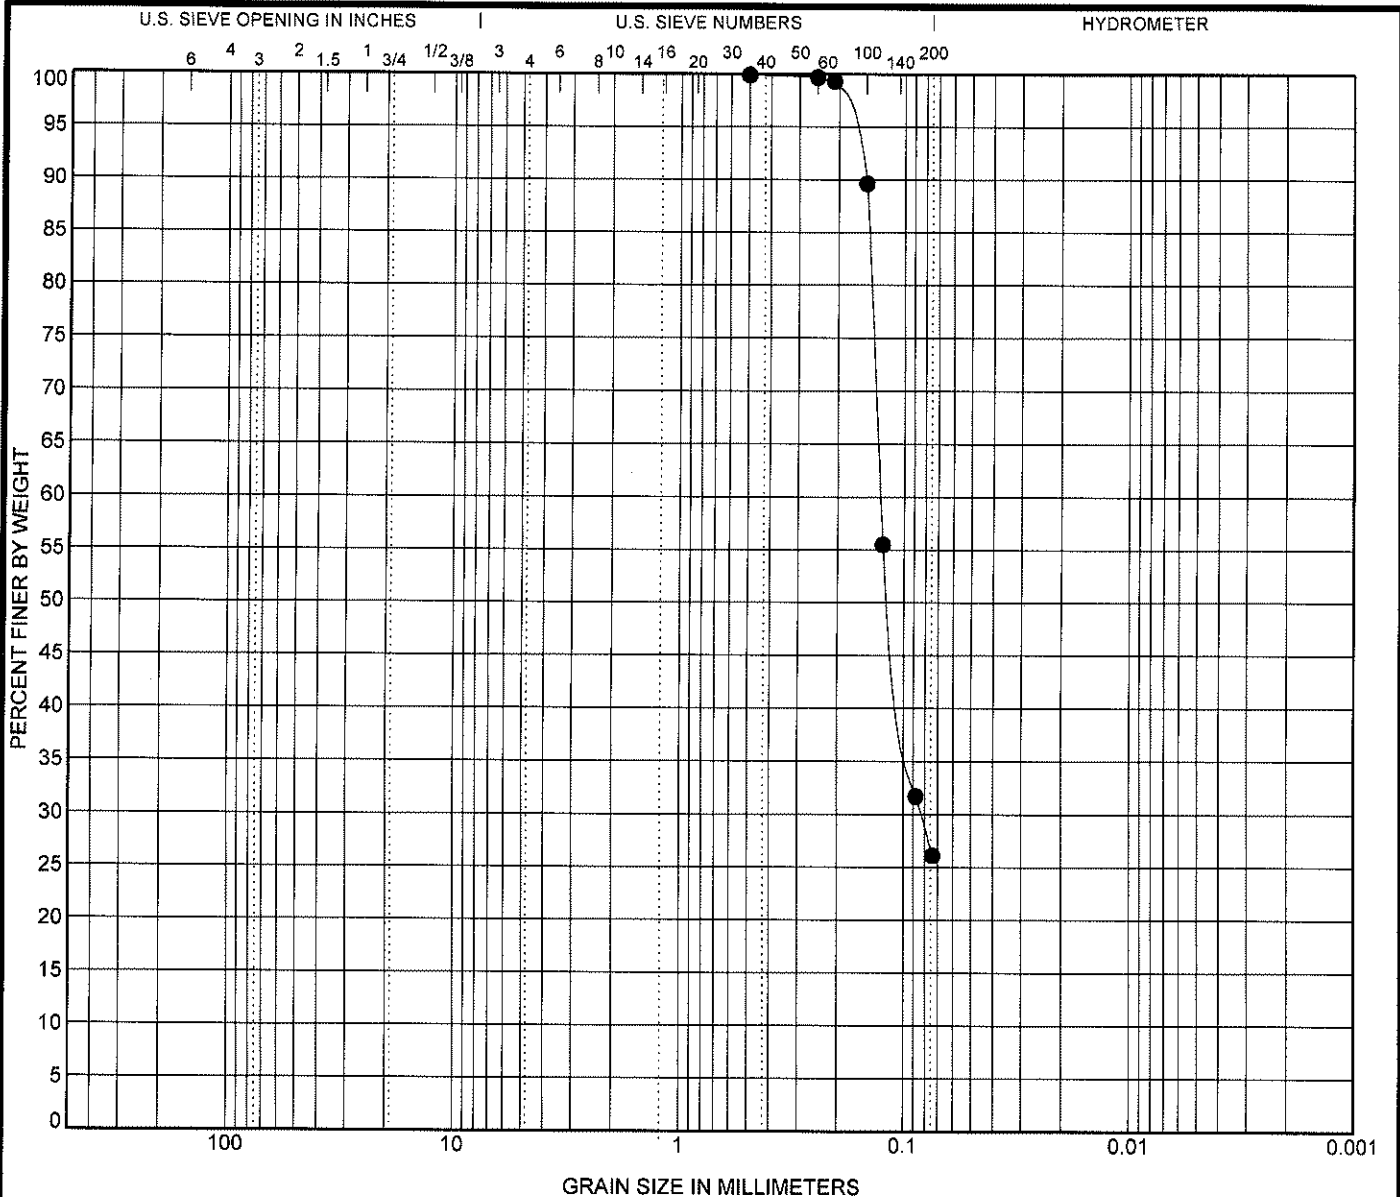

COBBLES	GRAVEL		SAND			SILT OR CLAY
	coarse	fine	coarse	medium	fine	

Specimen ID	Depth	Classification	LL	PL	PI	Cc	Cu
● AA-29	(-31' to -32' NAVD)	Borrow Area (-31' to -32' NAVD)					

Specimen ID	Depth	D100	D60	D30	D10	%Gravel	%Sand	%Silt	%Clay
● AA-29	(-31' to -32' NAVD)	0.5	0.128	0.083		0.0			



Rock Engineering & Testing Lab., Inc.
 6817 Leopard St.
 Corpus Christi, TX 78409
 Telephone: (361) 883-4555
 Fax: (361) 883-4711

GRAIN SIZE DISTRIBUTION

Project: Anchorage Basin Sand Source Investigation
 Location: Anchorage Basin; Galveston, Texas
 Number: G109112

LOG OF BORING AA-29

SHEET 1 OF 2



Rock Engineering & Testing Lab., Inc.
6817 Leopard St.
Corpus Christi, TX 78409
Telephone: (361) 883-4555
Fax: (361) 883-4711

CLIENT: HDR Engineering, Inc.
PROJECT: Anchorage Basin Sand Source Investigation
LOCATION: Anchorage Basin; Galveston, Texas
NUMBER: G109112

DATE(S) DRILLED: 03/10/09 - 03/10/09

FIELD DATA		LABORATORY DATA							DRILLING METHOD(S): Vibracore			
SOIL SYMBOL	Elevation, Ft. [NAVD]	SAMPLE NUMBER	SAMPLES	N: BLOWS/FT P: TONS/SQ FT T: TONS/SQ FT PERCENT RECOVERY/ ROCK QUALITY DESIGNATION	MOISTURE CONTENT (%)	ATTERBERG LIMITS			DRY DENSITY POUNDS/CU FT	COMPRESSIVE STRENGTH (TONS/SQ FT)	MINUS NO. 200 SIEVE (%)	GROUNDWATER INFORMATION:
						LL	PL	PI				SURFACE ELEVATION: -30' NAVD
DESCRIPTION OF STRATUM												
	19											
	20											
	21											
	22											
	23											
	24											
	25											
	26											
	27											
	28											
	29											
	30											
	31	S-1								47		<u>CLAYEY SAND</u> , dark gray.
	32	S-2								26		<u>SILTY CLAYEY SAND</u> , dark gray.
	33	S-3										<u>CLAYEY SAND</u> , dark gray.
	34	S-4										Same as above.
	35	S-5								43		Same as above.
	36	S-6										<u>CLAYEY SAND</u> , dark gray.
N - STANDARD PENETRATION TEST RESISTANCE P - POCKET PENETROMETER RESISTANCE T - POCKET TORVANE SHEAR STRENGTH											REMARKS: Boring depth and location was determined by HDR Engineering, Inc. Boring operations were performed by Ocean Surveys, Inc. GPS Coord. N. 13,700,790' E. 3,322,827'	

LOG OF BORING G109112 PROP. ANCHORAGE BASIN SAND SOURCE.GPJ ROCK_ETL_GDT_4/28/09

LOG OF BORING AA-29



Rock Engineering & Testing Lab., Inc.
6817 Leopard St.
Corpus Christi, TX 78409
Telephone: (361) 883-4555
Fax: (361) 883-4711

CLIENT: HDR Engineering, Inc.
PROJECT: Anchorage Basin Sand Source Investigation
LOCATION: Anchorage Basin; Galveston, Texas
NUMBER: G109112

DATE(S) DRILLED: 03/10/09 - 03/10/09

FIELD DATA				LABORATORY DATA							DRILLING METHOD(S):		
SOIL SYMBOL	Elevation, Ft. [NAVD]	SAMPLE NUMBER	SAMPLES	N: BLOWS/FT P: TONS/SQ FT T: TONS/SQ FT PERCENT RECOVERY/ ROCK QUALITY DESIGNATION	MOISTURE CONTENT (%)	ATTERBERG LIMITS			DRY DENSITY POUNDS/CU FT	COMPRESSIVE STRENGTH (TONS/SQ FT)	MINUS NO. 200 SIEVE (%)	Vibracore	
						LL	PL	PI				GROUNDWATER INFORMATION:	
SURFACE ELEVATION: -30' NAVD													
DESCRIPTION OF STRATUM													
37	S-7											24	Same as above.
38	S-8												<u>SILTY CLAYEY SAND</u> , dark gray.
39	S-9												Same as above.
40	S-10												Same as above.
Boring was extended to an elevation of -40-feet NAVD during the drilling operations.													

N - STANDARD PENETRATION TEST RESISTANCE
P - POCKET PENETROMETER RESISTANCE
T - POCKET TORVANE SHEAR STRENGTH

REMARKS:

Boring depth and location was determined by HDR Engineering, Inc. Boring operations were performed by Ocean Surveys, Inc.
GPS Coord. N. 13,700,790' E. 3,322,827'