



## Aptim Environmental & Infrastructure, LLC

6401 Congress Avenue, Suite 140

Boca Raton, Florida 33487

Phone # 1-561-391-8102

### Legend for Geotechnical Data

#### Grain Size Scale for Sediments

Unified Soil Classification System (USCS) (ASTM D2487/2488)		APTIM Standard Sieve Stack		
		Sieve Number	Size (phi)	Size (mm)
Gravel	Coarse Gravel	3/4	-4.25	19.03
	Fine Gravel	5/8	-4.00	16.00
		7/16	-3.50	11.20
		5/16	-3.00	8.00
		3 1/2	-2.50	5.60
		4	-2.25	4.75
Sand	Coarse Sand	5	-2.00	4.00
		7	-1.50	2.80
		10	-1.00	2.00
	Medium Sand	14	-0.50	1.40
		18	0.00	1.00
		25	0.50	0.71
		35	1.00	0.50
	Fine Sand	45	1.50	0.36
		60	2.00	0.25
		80	2.50	0.18
		120	3.00	0.13
		170	3.50	0.09
		200	3.75	0.08
Fines	Silt/Clay	230	4.00	0.06

#### Proportional Definition of Descriptive Terms

<u>Descriptive Term</u>	<u>Range of Proportions</u>
Sandy, gravelly, etc.	35 % to 50 %
Some	20 % to 35 %
Little	10 % to 20 %
Trace	1 % to 10 %






















#### Consistency of Cohesive Soils

Description	Consistency Index	Approximate Undrained Shear Strength (kPa)	Field Identification
Hard		Over 300	Indented with difficulty by thumbnail, brittle.
Very Stiff	>1	150-300	Readily indented by thumbnail, still very tough.
Stiff	0.75-1	75-150	Readily indented by thumb but penetrated only with difficulty. Cannot be moulded in the fingers.
Firm	0.5-0.75	40-75	Can be penetrated several centimeters by thumb with moderate effort and moulded in fingers by strong pressure.
Soft	<0.5	20-40	Easily penetrated several centimeters by thumb, easily moulded.
Very Soft		Less than 20	Easily penetrated several centimeters by fist, exudes between fingers when squeezed in fist.

Source: *Engineering Properties of Soils and Rocks, Fourth Edition by Fred G. Bell*

## USCS Classifications

Refers to the Army Corps of Engineers Unified Soils Classification System. Class types are defined primarily by grain size, sorting and percent of material passing the #200 sieve. Classification of materials on the core logs based on visual field examinations are identified on the core logs under the Classification of Materials Description. Classifications based on laboratory sieve analyses are identified on the core logs in the Legend and under Remarks.

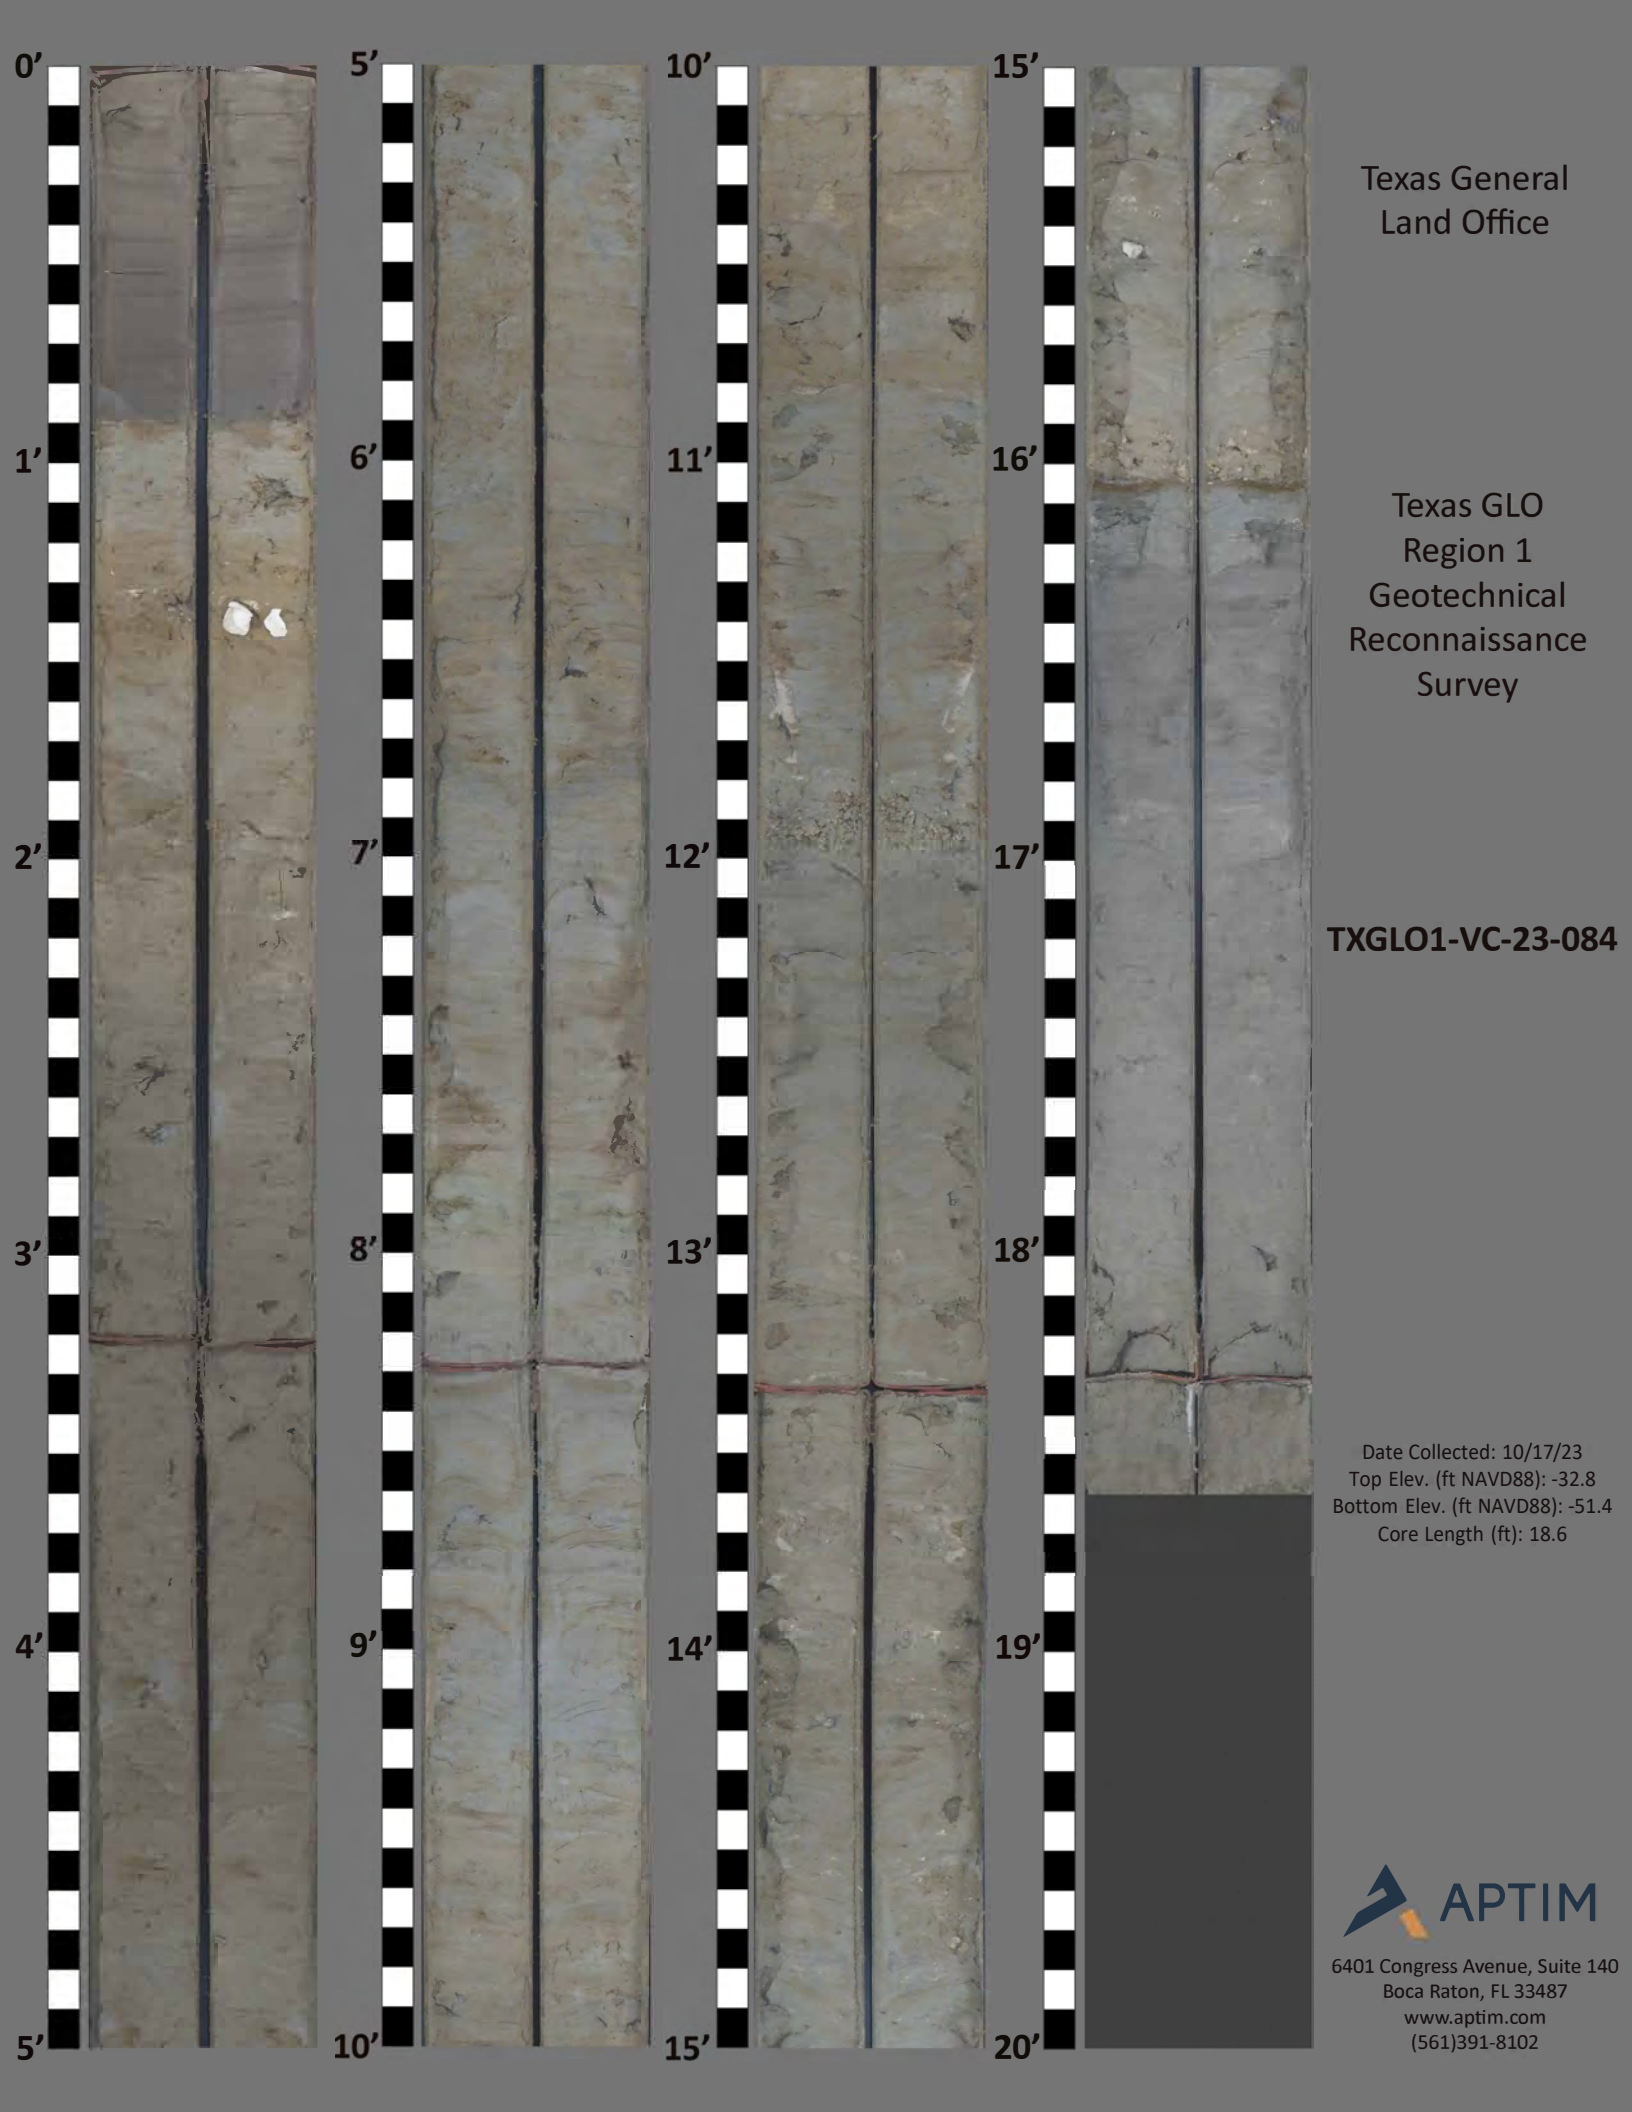
GW		Well graded gravels or gravel-sand mixtures, little or no fines	ML		Inorganic silts and very fine sands, rock flour, sandy silts or clayey silts with slight plasticity
GP		Poorly graded gravels or gravel-sand mixtures, w/ little or no fines	MH		Inorganic silts, micaceous or diatomaceous fine sandy or silty soil, elastic silts
GM		Silty gravels, gravel-sand-silt mixtures	OL		Organic silts and organic silt-clays of low plasticity
GC		Clayey gravels, gravel-sand-clay mixtures	OH		Organic clays of medium to high plasticity, organic silts
SW		Well graded sands or gravelly sands, little or no fines	CL		Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays
SP		Poorly graded sands or gravelly sands, little or no fines	CH		Inorganic clays of high plasticity, fat clays
SM		Silty sands, sand-silt mixtures	PT		Peat and other highly organic soils
SC		Clayey sands, sand-clay mixtures	SP-SM		Poorly-graded silty sand
SW-SM		Well-graded silty sand	SM-SC		Silty clayey sand
GW-GM		Well-graded silty gravel	ML-CL		Inorganic silty lean clay
GM-GC		Clayey silty gravel			

Note: Information is after ACOE Atlantic Division Manual # 1110-1-1 titled *Engineering and Design Geotechnical Manual for Surface and Subsurface Investigations*

<b>DRILLING LOG</b>		<b>DIVISION</b>	<b>INSTALLATION</b>	<b>SHEET 1</b> <b>OF 1 SHEETS</b>
<b>1. PROJECT</b> TX GLO Region 1 Recon Geotechnical Sand Search Jefferson, Chambers, Galveston and Brazoria Co.			<b>9. SIZE AND TYPE OF BIT</b> 3.0 In.	
<b>2. BORING DESIGNATION</b> TXGLO1-VC-23-084			<b>10. COORDINATE SYSTEM/DATUM</b> Texas State Plane South	
<b>3. DRILLING AGENCY</b> APTIM			<b>11. MANUFACTURER'S DESIGNATION OF DRILL</b> APTIM SEAS VC-700 Vibracore	
<b>4. NAME OF DRILLER</b> APTIM			<input type="checkbox"/> <b>AUTO HAMMER</b> <input type="checkbox"/> <b>MANUAL HAMMER</b>	
<b>5. DIRECTION OF BORING</b> <input checked="" type="checkbox"/> <b>VERTICAL</b> <input type="checkbox"/> <b>INCLINED</b>			<b>12. TOTAL SAMPLES</b> 0	
<b>6. THICKNESS OF OVERBURDEN</b> 0.0 Ft.			<b>13. TOTAL NUMBER CORE BOXES</b>	
<b>7. DEPTH DRILLED INTO ROCK</b> 0.0 Ft.			<b>14. ELEVATION GROUND WATER</b>	
<b>8. TOTAL DEPTH OF BORING</b> 19.0 Ft.			<b>15. DATE BORING</b> 10-17-23	
			<b>16. ELEVATION TOP OF BORING</b> -32.8 Ft.	
			<b>17. TOTAL RECOVERY FOR BORING</b> 18.6 Ft.	
			<b>18. SIGNATURE AND TITLE OF INSPECTOR</b> SF	

ELEV. (ft)	DEPTH (ft)	LEGEND	CLASSIFICATION OF MATERIALS Depths and elevations based on measured values	% REC.	BOX OR SAMPLE	REMARKS The USCS classification system defines silt as the percent passing the No.200 (0.075 mm) sieve
-32.8	0.0					
-33.2	0.4		Silty LEAN CLAY, soft, trace sand, fine grained, quartz, brown (7.5YR-4/2), (ML-CL).		T1	Sample #T1, Depth = 0.6' Ave. Field Vane (tsf): 0.05
-33.7	0.9		LEAN CLAY, firm, trace organics, organics distributed in laminae at top and bottom of layer, dark brown (7.5YR-3/2), (CL).		T2	Sample #T2, Depth = 2.6' Ave. Field Vane (tsf): 0.20
			LEAN CLAY, very stiff to hard, some sand, fine grained, quartz, little organics, trace shell fragments, trace shell hash, trace silt, sand distributed in laminae and throughout layer, shell fragments are bivalves up to 1.0", hardness increases with depth in layer, oxidation throughout layer, 1.0" shell hash pockets @ 1.3' and 2.1', 2.0" sandy pocket @ 10.2', color is mottled light olive brown (2.5Y-5/4) and gray (5Y-6/1), (CL).		T3	Sample #T3, Depth = 6.0' Ave. Field Vane (tsf): 0.26
					T4	Sample #T4, Depth = 11.2' Ave. Field Vane (tsf): 0.36
-44.6	11.8				T5	Sample #T5, Depth = 12.1' Ave. Field Vane (tsf): 0.61
			FAT CLAY, hard, little rock fragments, trace organics, trace sand, fine grained, quartz, rock fragments are fragments of lithified clay up to 0.5", sand typically distributed in laminae, oxidation throughout layer, 2.0" pockets of rock fragments @ 11.8' and 15.9', 1.0" sand pocket @ 13.6', color is mottled light olive brown (2.5Y-5/3) and greenish gray (10Y-5/1), (CH).		T6	Sample #T6, Depth = 15.0' Ave. Field Vane (tsf): 0.67
-48.9	16.1					
			Sandy LEAN CLAY, hard, trace organics, sand component is fine grained quartz, sand distributed in laminae and throughout layer, oxidized laminae throughout layer, Bit sample from 18.3' to 18.6', gray (5Y-5/1), (CL).			
-51.4	18.6					
-51.8	19.0		No recovery.			
			End of Boring			

REGION 1 RECON GEOTECH GPJ 3/25/24



Texas General  
Land Office

Texas GLO  
Region 1  
Geotechnical  
Reconnaissance  
Survey

**TXGLO1-VC-23-084**

Date Collected: 10/17/23  
Top Elev. (ft NAVD88): -32.8  
Bottom Elev. (ft NAVD88): -51.4  
Core Length (ft): 18.6



## Mini Vane Shear Test Results

CORE ID	SAMPLE DEPTH (ft)	TORVANE (kg/cm <sup>2</sup> )	TORVANE (tsf)	TORVANE (kpa)	DESCRIPTION <sup>1</sup>
TXGLO1-VC-23-081	0.4	0.0	0.00	0.00	Very Soft
	1.8	1.0	0.10	98.07	Stiff
	8.0	7.0	0.72	686.47	Hard
	13.0	7.5	0.77	735.50	Hard
TXGLO1-VC-23-082	0.6	0.3	0.03	24.52	Soft
	3.7	6.0	0.61	588.40	Hard
	8.3	6.5	0.67	637.43	Hard
TXGLO1-VC-23-083	2.0	2.1	0.22	205.94	Very Stiff
	4.1	0.3	0.03	29.42	Soft
	7.0	3.0	0.31	294.20	Very Stiff
	12.5	3.8	0.38	367.75	Hard
	16.5	3.0	0.31	294.20	Very Stiff
TXGLO1-VC-23-084	0.6	0.5	0.05	49.03	Firm
	2.6	2.0	0.20	196.13	Very Stiff
	6.0	2.5	0.26	245.17	Very Stiff
	11.2	3.5	0.36	343.23	Hard
	12.1	6.0	0.61	588.40	Hard
	15.0	6.5	0.67	637.43	Hard
TXGLO1-VC-23-085	2.7	2.0	0.20	196.13	Very Stiff
	8.7	1.8	0.18	171.62	Very Stiff
	15.0	4.0	0.41	392.27	Hard
TXGLO1-VC-23-086	1.2	0.0	0.00	0.00	Very Soft
	4.6	1.5	0.15	147.10	Stiff
	10.2	2.0	0.20	196.13	Very Stiff
	13.0	0.8	0.08	73.55	Firm
	15.1	6.0	0.61	588.40	Hard
TXGLO1-VC-23-087	No Torvane Conducted				
TXGLO1-VC-23-088	2.5	2.0	0.20	196.13	Very Stiff
	6.0	2.0	0.20	196.13	Very Stiff
	7.7	2.5	0.26	245.17	Very Stiff
	10.2	5.0	0.51	490.33	Hard
	12.8	4.0	0.41	392.27	Hard
	16.7	3.0	0.31	294.20	Very Stiff
TXGLO1-VC-23-089	14.5	2.0	0.20	196.13	Very Stiff
	17.6	2.5	0.26	245.17	Very Stiff
TXGLO1-VC-23-090	5.4	0.8	0.08	73.55	Firm
	10.8	1.5	0.15	147.10	Stiff
	16.2	4.0	0.41	392.27	Hard
TXGLO1-VC-23-091	2.2	0.5	0.05	49.03	Firm
	11.3	1.0	0.10	98.07	Stiff
TXGLO1-VC-23-092	13.3	0.5	0.05	49.03	Firm
	17.2	0.3	0.03	24.52	Soft
TXGLO1-VC-23-093	0.4	0.3	0.03	24.52	Soft
	10.0	3.0	0.31	294.20	Very Stiff
	12.3	4.5	0.46	441.30	Hard
	18.6	9.3	0.95	907.12	Hard