



- Geotechnical Engineering
- Construction Materials Testing

PROJECT NAME: Anchorage Basin Sand Source Investigation

CLIENT: HDR Engineering, Inc.

BORING ID.: AA-23


DESCRIPTION: Anchorage Basin Borrow Source Area

PERCENT SHELL BY WEIGHT (BASED ON #10 SIEVE)				
-32' to -33' NAVD	-34' to -35' NAVD	-36' to -37' NAVD	-39' to -40' NAVD	-41' to -42' NAVD
0.00	0.02	0.00	0.00	0.00

ASTM MESH	% FINER BY WEIGHT AFTER REMOVING SHELL				
	-32' to -33' NAVD	-34' to -35' NAVD	-36' to -37' NAVD	-39' to -40' NAVD	-41' to -42' NAVD
#10	100.00	100.00	100.00	100.00	100.00
#18	99.85	99.91	99.98	100.00	99.98
#35	99.70	99.67	99.96	99.95	99.93
#60	99.28	99.26	99.85	99.76	99.76
#70	98.38	98.97	99.71	99.31	99.49
#100	61.43	66.78	54.84	77.39	58.16
#120	32.20	49.00	33.34	56.65	29.41
#170	27.42	35.28	28.54	42.74	12.37
#200	23.36	31.58	20.20	39.19	8.85
STATISTICS (EXCLUDING SHELL)					
MEDIAN GRAIN SIZE (mm)	0.15	0.13	0.15	0.12	0.15
MEAN GRAIN SIZE (mm)	N/A	N/A	N/A	N/A	0.14
SORTING (σ)	N/A	N/A	N/A	N/A	N/A

*The -#10 material was utilized as the total sample for Grain Size Distribution Curve calculations.

US GRAIN SIZE G109112 PROP. ANCHORAGE BASIN SAND SOURCE GPJ US LAB GDT 4/13/09

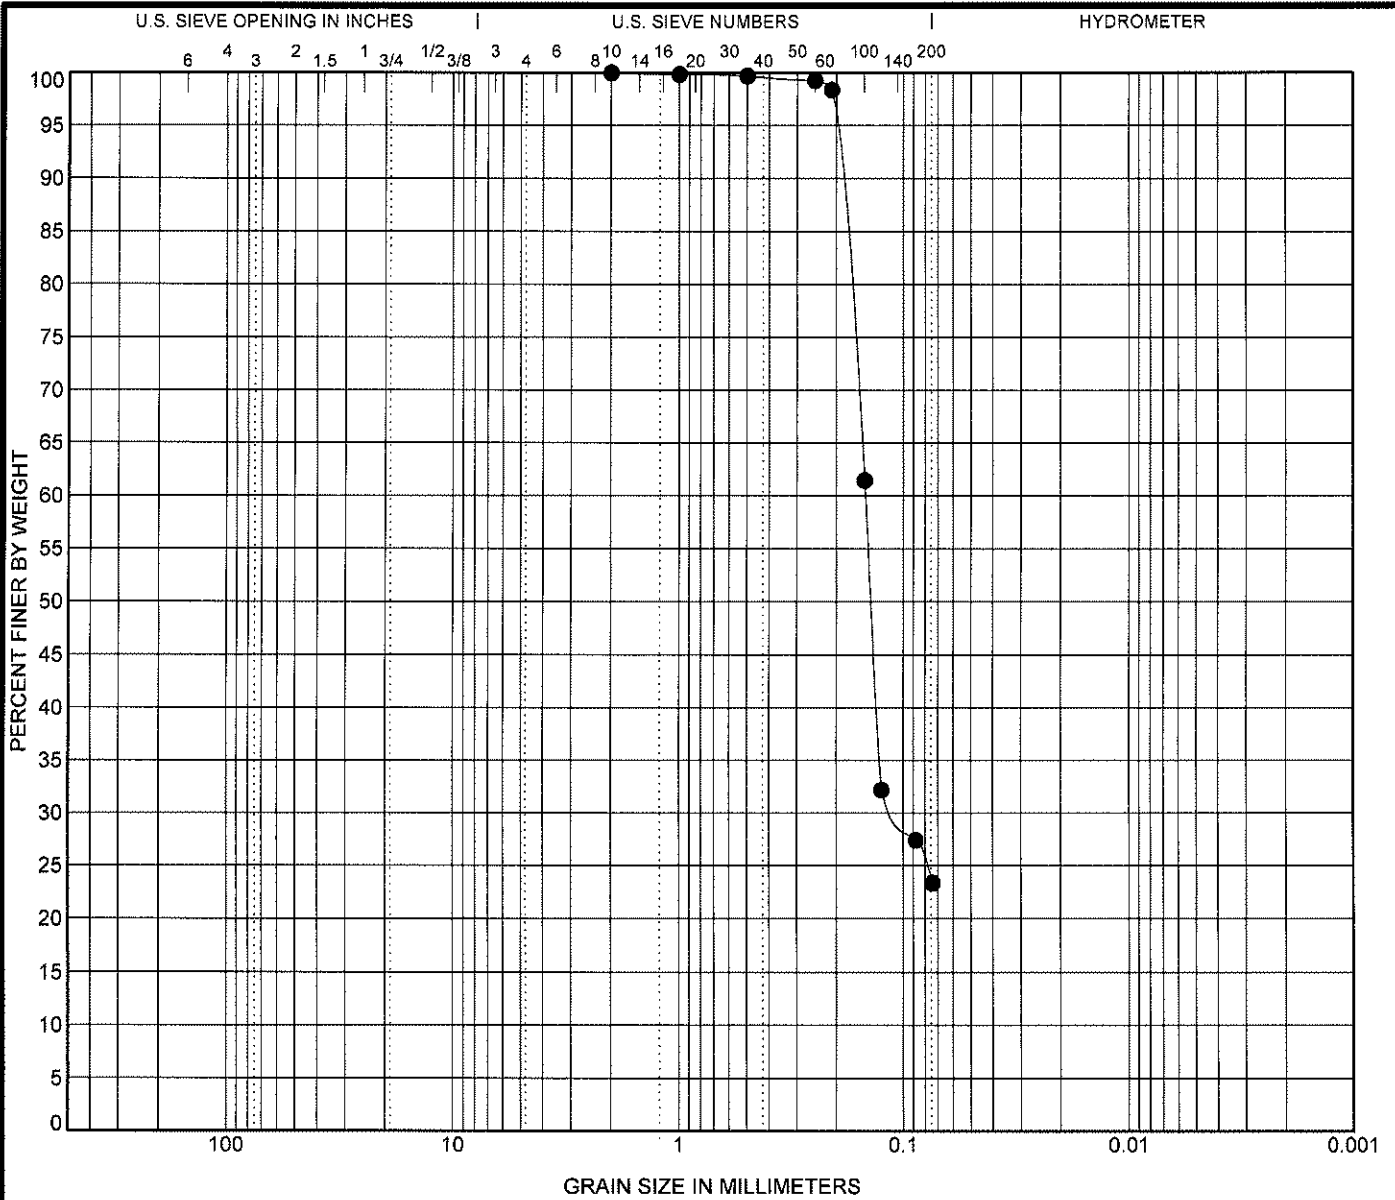

COBBLES	GRAVEL		SAND			SILT OR CLAY
	coarse	fine	coarse	medium	fine	


Specimen ID	Depth	Classification	LL	PL	PI	Cc	Cu
● AA-23	(-32' to -33' NAVD)	Borrow Area (-32' to -33' NAVD)					

Specimen ID	Depth	D100	D60	D30	D10	%Gravel	%Sand	%Silt	%Clay
● AA-23	(-32' to -33' NAVD)	2	0.148	0.106		0.0			



Rock Engineering & Testing Lab., Inc.
6817 Leopard St.
Corpus Christi, TX 78409
Telephone: (361) 883-4555
Fax: (361) 883-4711

GRAIN SIZE DISTRIBUTION
Project: Anchorage Basin Sand Source Investigation
Location: Anchorage Basin; Galveston, Texas
Number: G109112

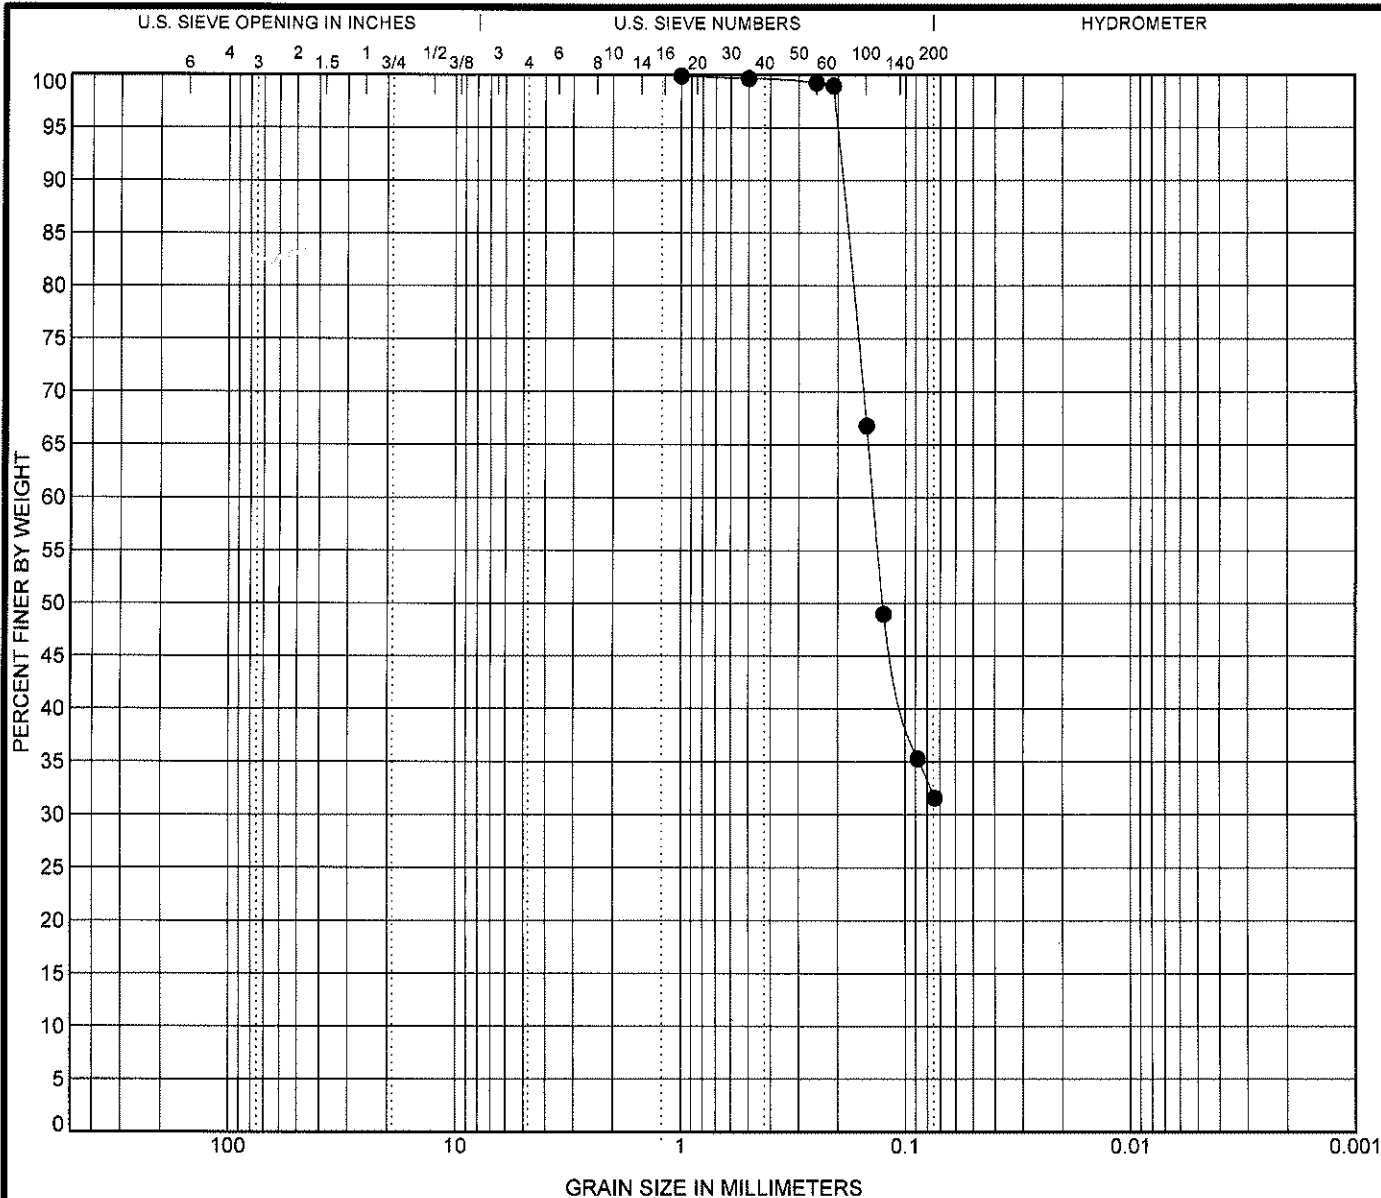

COBBLES	GRAVEL		SAND			SILT OR CLAY
	coarse	fine	coarse	medium	fine	

Specimen ID	Depth	Classification	LL	PL	PI	Cc	Cu
● AA-23	(-34' to -35' NAVD)	Borrow Area (-34' to -35' NAVD)					

Specimen ID	Depth	D100	D60	D30	D10	%Gravel	%Sand	%Silt	%Clay
● AA-23	(-34' to -35' NAVD)	1	0.139			0.0			



Rock Engineering & Testing Lab., Inc.
6817 Leopard St.
Corpus Christi, TX 78409
Telephone: (361) 883-4555
Fax: (361) 883-4711


GRAIN SIZE DISTRIBUTION

Project: Anchorage Basin Sand Source Investigation

Location: Anchorage Basin; Galveston, Texas

Number: G109112

US GRAIN SIZE G109112 PROP. ANCHORAGE BASIN SAND SOURCE GPJ US LAB.GDT 4/13/09

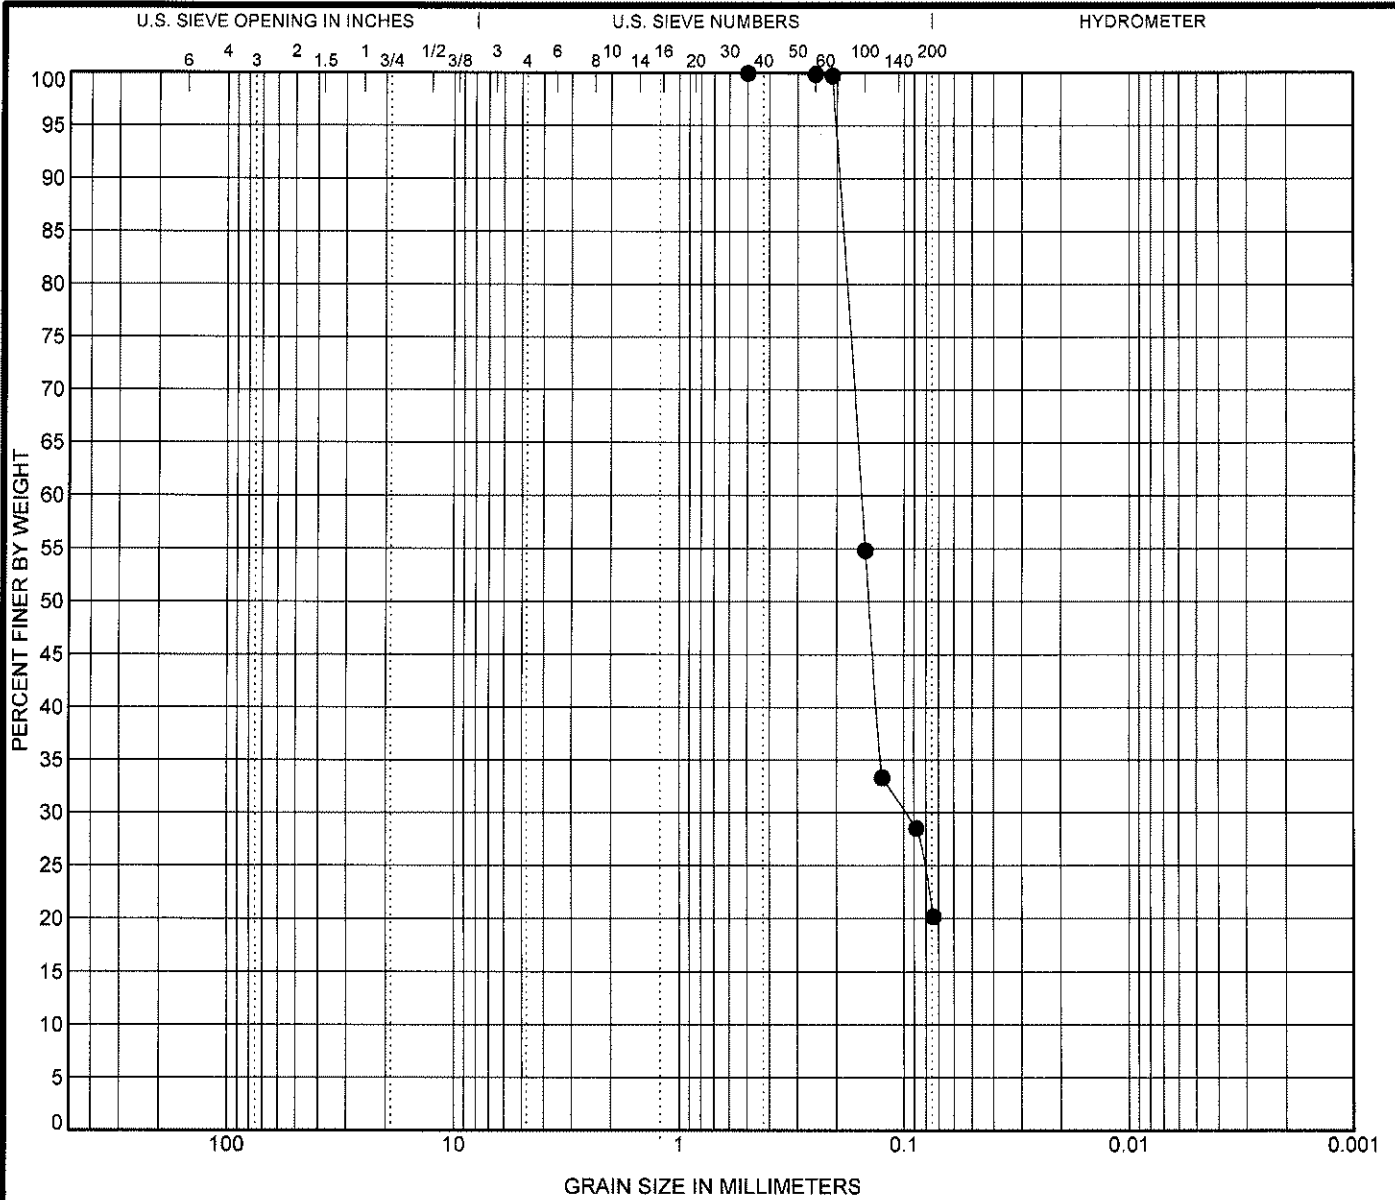

COBBLES	GRAVEL		SAND			SILT OR CLAY
	coarse	fine	coarse	medium	fine	


Specimen ID	Depth	Classification	LL	PL	PI	Cc	Cu
● AA-23	(-36' to -37' NAVD)	Borrow Area (-36' to -37' NAVD)					

Specimen ID	Depth	D100	D60	D30	D10	%Gravel	%Sand	%Silt	%Clay
● AA-23	(-36' to -37' NAVD)	0.5	0.155	0.098		0.0			



Rock Engineering & Testing Lab., Inc.
6817 Leopard St.
Corpus Christi, TX 78409
Telephone: (361) 883-4555
Fax: (361) 883-4711

GRAIN SIZE DISTRIBUTION
Project: Anchorage Basin Sand Source Investigation
Location: Anchorage Basin; Galveston, Texas
Number: G109112

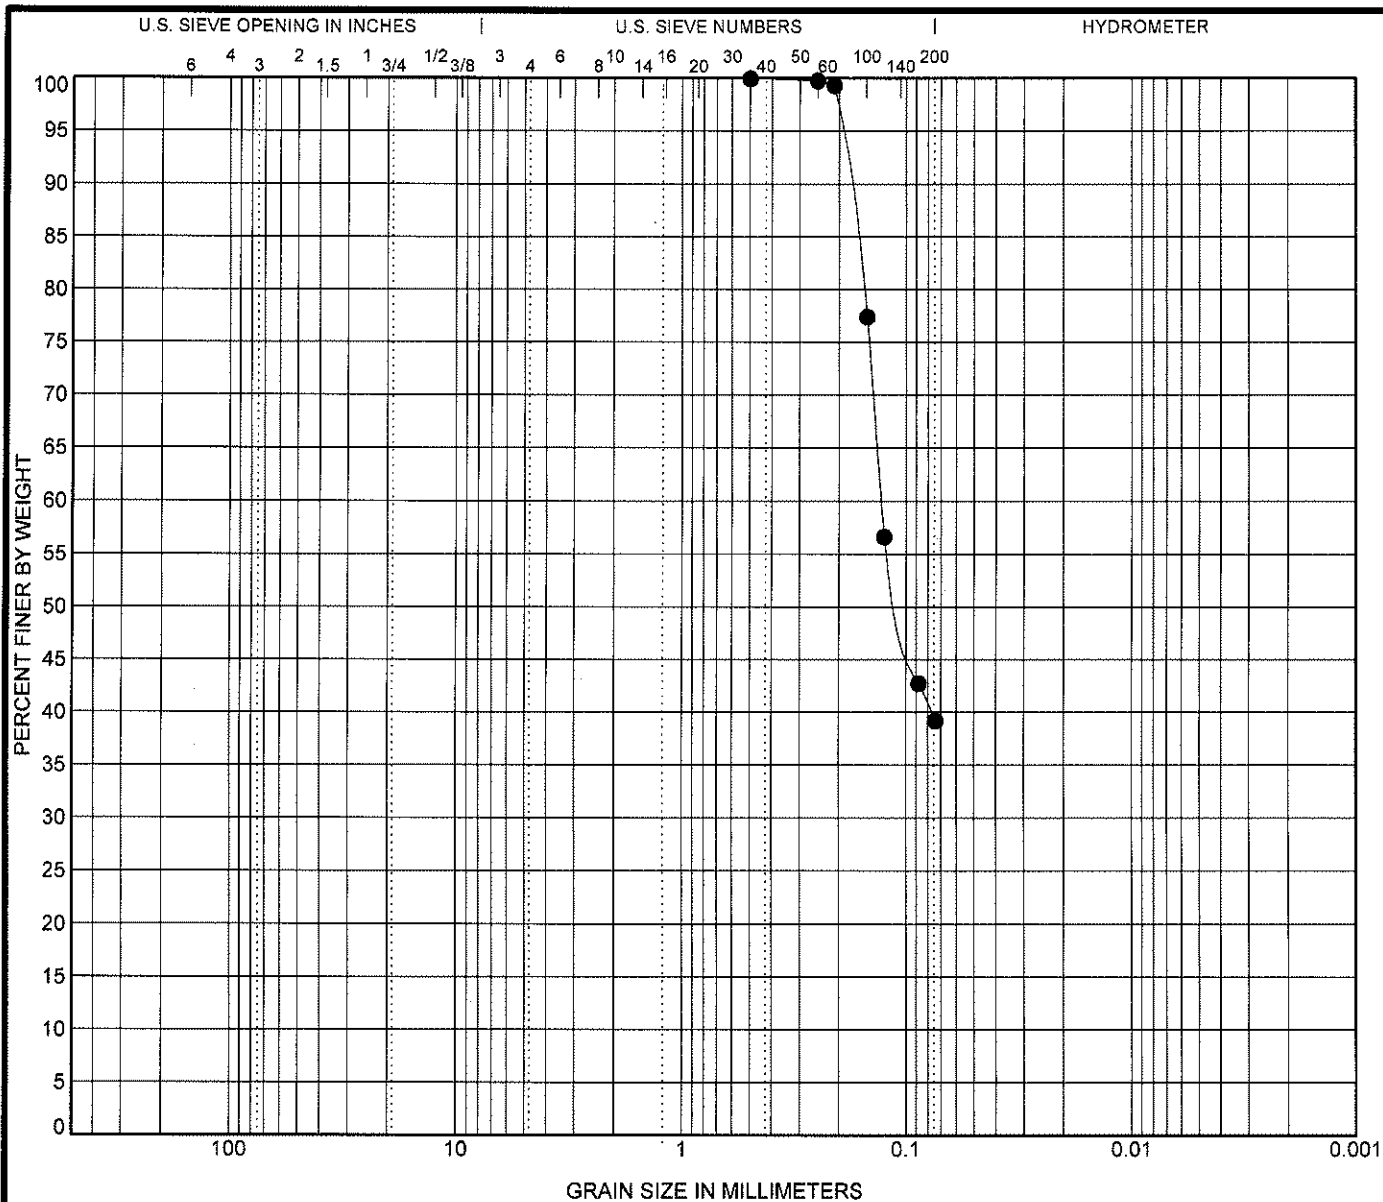

COBBLES	GRAVEL		SAND			SILT OR CLAY
	coarse	fine	coarse	medium	fine	

Specimen ID	Depth	Classification	LL	PL	PI	Cc	Cu
● AA-23	(-39' to -40' NAVD)	Borrow Area (-39' to -40' NAVD)					

Specimen ID	Depth	D100	D60	D30	D10	%Gravel	%Sand	%Silt	%Clay
● AA-23	(-39' to -40' NAVD)	0.5	0.129			0.0			




Rock Engineering & Testing Lab., Inc.
6817 Leopard St.
Corpus Christi, TX 78409
Telephone: (361) 883-4555
Fax: (361) 883-4711

GRAIN SIZE DISTRIBUTION

Project: Anchorage Basin Sand Source Investigation

Location: Anchorage Basin; Galveston, Texas

Number: G109112

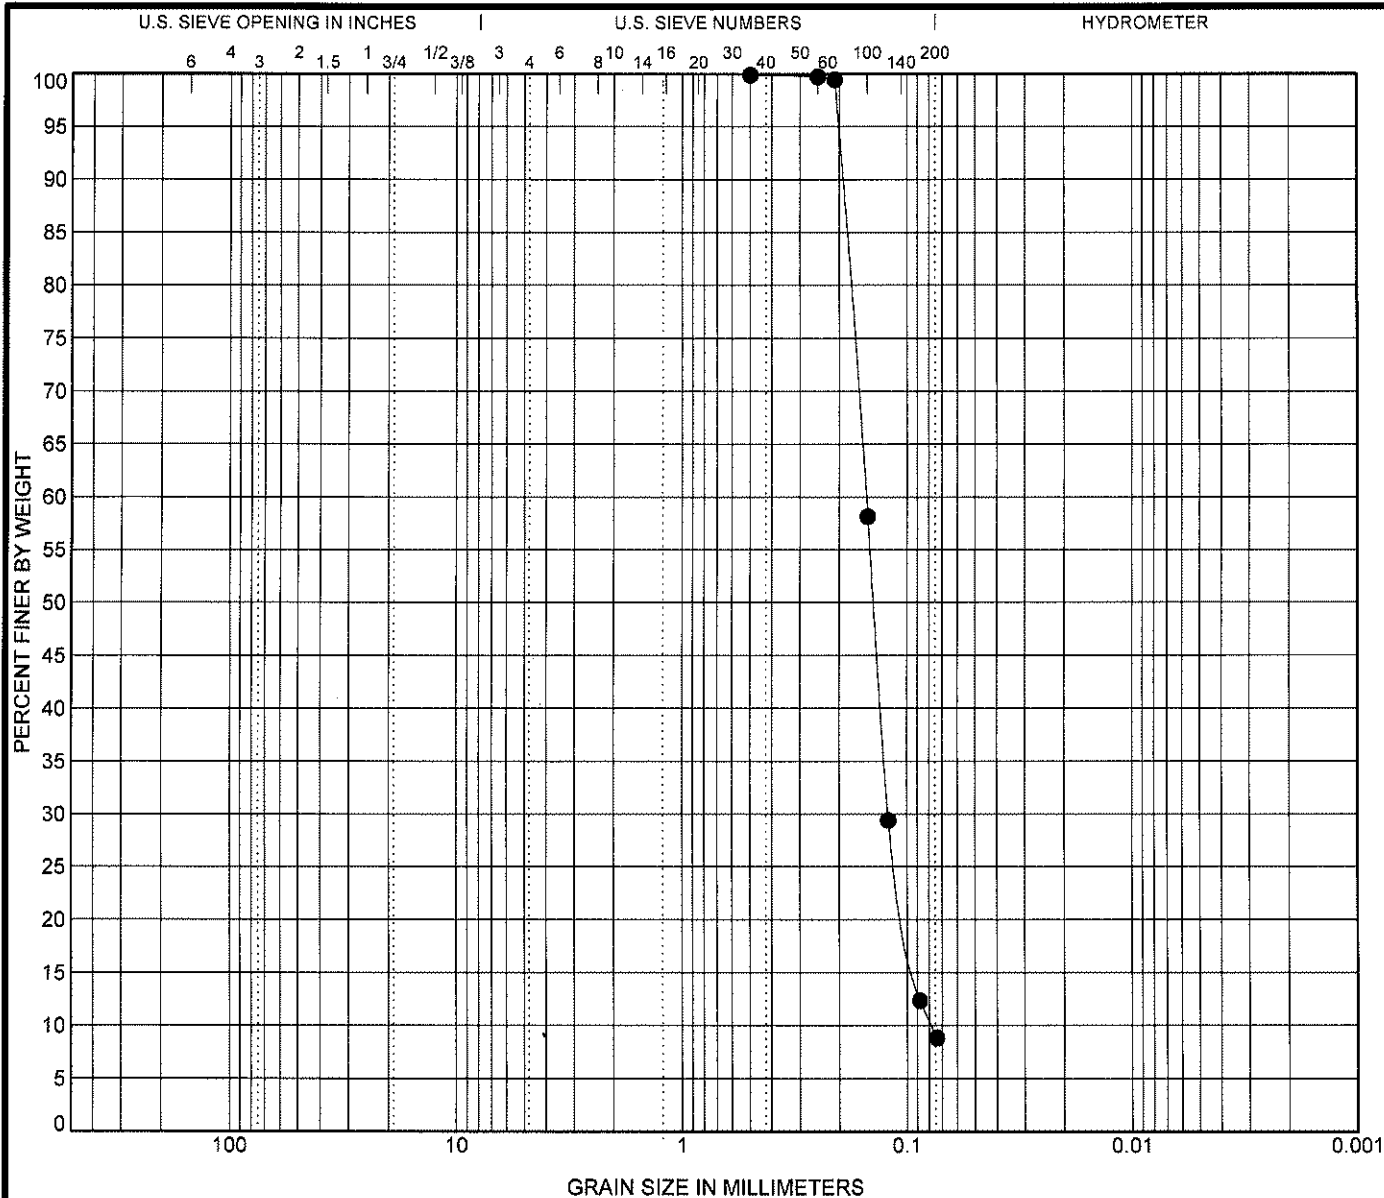

COBBLES	GRAVEL		SAND			SILT OR CLAY
	coarse	fine	coarse	medium	fine	

[illegible]

Rock Engineering & Testing Lab., Inc.
6817 Leopard St.
Corpus Christi, TX 78409
Telephone: (361) 883-4555
Fax: (361) 883-4711

GRAIN SIZE DISTRIBUTION


Project: Anchorage Basin Sand Source Investigation

Location: Anchorage Basin; Galveston, Texas

Number: G109112

LOG OF BORING AA-23

SHEET 1 OF 2



Rock Engineering & Testing Lab., Inc.
 6817 Leopard St.
 Corpus Christi, TX 78409
 Telephone: (361) 883-4555
 Fax: (361) 883-4711

CLIENT: HDR Engineering, Inc.
 PROJECT: Anchorage Basin Sand Source Investigation
 LOCATION: Anchorage Basin, Galveston, Texas
 NUMBER: G109112

DATE(S) DRILLED: 03/11/09 - 03/11/09

DRILLING METHOD(S):

Vibracore

GROUNDWATER INFORMATION:

SURFACE ELEVATION: -32' NAVD

DESCRIPTION OF STRATUM

SOIL SYMBOL	FIELD DATA					LABORATORY DATA						
	Elevation, Ft. [NAVD]	SAMPLE NUMBER	SAMPLES	N: BLOWS/FT P: TONS/SQ FT T: TONS/SQ FT PERCENT RECOVERY/ ROCK QUALITY DESIGNATION	MOISTURE CONTENT (%)	ATTERBERG LIMITS			DRY DENSITY POUNDS/CU.FT	COMPRESSION STRENGTH (TONS/SQ FT)	MINUS NO. 200 SIEVE (%)	
						LL	PL	PI				
	21											
	22											
	23											
	24											
	25											
	26											
	27											
	28											
	29											
	30											
	31											
	32											
	33	S-1									23	<u>SILTY CLAYEY SAND</u> , gray.
	34	S-2										Same as above.
	35	S-3									32	<u>CLAYEY SAND</u> , gray.
	36	S-4										Same as above.
	37	S-5									20	<u>SILTY CLAYEY SAND</u> , gray.
	38	S-6										Same as above.
	39	S-7										<u>CLAYEY SAND</u> , gray.
	40	S-8									39	Same as above.
N - STANDARD PENETRATION TEST RESISTANCE P - POCKET PENETROMETER RESISTANCE T - POCKET TORVANE SHEAR STRENGTH												REMARKS: Boring depth and location was determined by HDR Engineering, Inc. Boring operations were performed by Ocean Surveys, Inc. GPS Coord. N. 13,698,522' E. 3,321,488'

LOG OF BORING G109112 PROP. ANCHORAGE BASIN SAND SOURCE G.P.J. ROCK ETL GDT 4/28/09

LOG OF BORING AA-23

SHEET 2 OF 2



Rock Engineering & Testing Lab., Inc.
6817 Leopard St.
Corpus Christi, TX 78409
Telephone: (361) 883-4555
Fax: (361) 883-4711

CLIENT: HDR Engineering, Inc.
PROJECT: Anchorage Basin Sand Source Investigation
LOCATION: Anchorage Basin, Galveston, Texas
NUMBER: G109112

DATE(S) DRILLED: 03/11/09 - 03/11/09

DRILLING METHOD(S):

Vibracore

GROUNDWATER INFORMATION:

SURFACE ELEVATION: -32' NAVD

DESCRIPTION OF STRATUM

Same as above.

POORLY GRADED SAND, with clay, gray.

Boring was extended to an elevation of -42-feet NAVD during the drilling operations.

FIELD DATA

LABORATORY DATA

SOIL SYMBOL	Elevation, Ft. [NAVD]	SAMPLE NUMBER	SAMPLES	N: BLOWS/FT P: TONS/SQ FT T: TONS/SQ FT PERCENT RECOVERY/ ROCK QUALITY DESIGNATION	MOISTURE CONTENT (%)	ATTERBERG LIMITS			DRY DENSITY POUNDS/CU.FT	COMPRESSIVE STRENGTH (TONS/SQ.FT)	MINUS NO. 200 SIEVE (%)
						LIQUID LIMIT LL	PLASTIC LIMIT PL	PLASTICITY INDEX PI			
	41	S-9									
	42	S-10									9

N - STANDARD PENETRATION TEST RESISTANCE
P - POCKET PENETROMETER RESISTANCE
T - POCKET TORVANE SHEAR STRENGTH

REMARKS:

Boring depth and location was determined by HDR Engineering, Inc. Boring operations were performed by Ocean Surveys, Inc.
GPS Coord. N. 13,698,522' E. 3,321,488'