



Aptim Environmental & Infrastructure, LLC

6401 Congress Avenue, Suite 140

Boca Raton, Florida 33487

Phone # 1-561-391-8102

Legend for Geotechnical Data

Grain Size Scale for Sediments

Unified Soil Classification System (USCS) (ASTM D2487/2488)		APTIM Standard Sieve Stack		
		Sieve Number	Size (phi)	Size (mm)
Gravel	Coarse Gravel	3/4	-4.25	19.03
	Fine Gravel	5/8	-4.00	16.00
		7/16	-3.50	11.20
		5/16	-3.00	8.00
		3 1/2	-2.50	5.60
		4	-2.25	4.75
Sand	Coarse Sand	5	-2.00	4.00
		7	-1.50	2.80
		10	-1.00	2.00
	Medium Sand	14	-0.50	1.40
		18	0.00	1.00
		25	0.50	0.71
		35	1.00	0.50
	Fine Sand	45	1.50	0.36
		60	2.00	0.25
		80	2.50	0.18
		120	3.00	0.13
		170	3.50	0.09
		200	3.75	0.08
Fines	Silt/Clay	230	4.00	0.06

Proportional Definition of Descriptive Terms

<u>Descriptive Term</u>	<u>Range of Proportions</u>
Sandy, gravelly, etc.	35 % to 50 %
Some	20 % to 35 %
Little	10 % to 20 %
Trace	1 % to 10 %

Consistency of Cohesive Soils

Description	Consistency Index	Approximate Undrained Shear Strength (kPa)	Field Identification
Hard		Over 300	Indented with difficulty by thumbnail, brittle.
Very Stiff	>1	150-300	Readily indented by thumbnail, still very tough.
Stiff	0.75-1	75-150	Readily indented by thumb but penetrated only with difficulty. Cannot be moulded in the fingers.
Firm	0.5-0.75	40-75	Can be penetrated several centimeters by thumb with moderate effort and moulded in fingers by strong pressure.
Soft	< 0.5	20-40	Easily penetrated several centimeters by thumb, easily moulded.
Very Soft		Less than 20	Easily penetrated several centimeters by fist, exudes between fingers when squeezed in fist.

Source: *Engineering Properties of Soils and Rocks, Fourth Edition by Fred G. Bell*

USCS Classifications


Refers to the Army Corps of Engineers Unified Soils Classification System. Class types are defined primarily by grain size, sorting and percent of material passing the #200 sieve. Classification of materials on the core logs based on visual field examinations are identified on the core logs under the Classification of Materials Description. Classifications based on laboratory sieve analyses are identified on the core logs in the Legend and under Remarks.

GW		Well graded gravels or gravel-sand mixtures, little or no fines	ML		Inorganic silts and very fine sands, rock flour, sandy silts or clayey silts with slight plasticity
GP		Poorly graded gravels or gravel-sand mixtures, w/ little or no fines	MH		Inorganic silts, micaceous or diatomaceous fine sandy or silty soil, elastic silts
GM		Silty gravels, gravel-sand-silt mixtures	OL		Organic silts and organic silt-clays of low plasticity
GC		Clayey gravels, gravel-sand-clay mixtures	OH		Organic clays of medium to high plasticity, organic silts
SW		Well graded sands or gravelly sands, little or no fines	CL		Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays
SP		Poorly graded sands or gravelly sands, little or no fines	CH		Inorganic clays of high plasticity, fat clays
SM		Silty sands, sand-silt mixtures	PT		Peat and other highly organic soils
SC		Clayey sands, sand-clay mixtures	SP-SM		Poorly-graded silty sand
SW-SM		Well-graded silty sand	SM-SC		Silty clayey sand
GW-GM		Well-graded silty gravel	ML-CL		Inorganic silty lean clay
GM-GC		Clayey silty gravel			

Note: Information is after ACOE Atlantic Division Manual # 1110-1-1 titled *Engineering and Design Geotechnical Manual for Surface and Subsurface Investigations*

DRILLING LOG		DIVISION		INSTALLATION		SHEET 1 OF 1 SHEETS	
1. PROJECT TX GLO Region 1 Recon Geotechnical Sand Search Jefferson, Chambers, Galveston and Brazoria Co.				9. SIZE AND TYPE OF BIT 3.0 In.			
2. BORING DESIGNATION TXGLO1-VC-23-029				10. COORDINATE SYSTEM/DATUM Texas State Plane South		HORIZONTAL NAD 1983	
3. DRILLING AGENCY APTIM				11. MANUFACTURER'S DESIGNATION OF DRILL APTIM SEAS VC-700 Vibracore		VERTICAL NAVD88	
4. NAME OF DRILLER APTIM				12. TOTAL SAMPLES 3		DISTURBED 4	
5. DIRECTION OF BORING ☒ VERTICAL ☐ INCLINED				13. TOTAL NUMBER CORE BOXES		☐ AUTO HAMMER ☐ MANUAL HAMMER	
6. THICKNESS OF OVERBURDEN 0.0 Ft.				14. ELEVATION GROUND WATER		15. DATE BORING 10-08-23	
7. DEPTH DRILLED INTO ROCK 0.0 Ft.				16. ELEVATION TOP OF BORING -30.6 Ft.		COMPLETED 10-08-23	
8. TOTAL DEPTH OF BORING 19.0 Ft.				17. TOTAL RECOVERY FOR BORING 18.9 Ft.		18. SIGNATURE AND TITLE OF INSPECTOR SM	
ELEV. (ft)	DEPTH (ft)	LEGEND	CLASSIFICATION OF MATERIALS Depths and elevations based on measured values	% REC.	BOX OR SAMPLE	REMARKS The USCS classification system defines silt as the percent passing the No.200 (0.075 mm) sieve	
-30.6	0.0						
-32.0	1.4		Sandy SILT, trace clay, trace organics, sand component is fine grained quartz, clay increases with depth in layer, clay distributed in pockets up to 1.0" and throughout layer, 0.5" organic pocket @ 0.6', light olive brown (2.5Y-5/3), (ML).				
-34.7	4.1		Silty FAT CLAY, stiff, trace sand, fine grained, quartz, oxidation between 1.7' & 2.6', grayish brown (2.5Y-5/2), (CH).		T1	Sample #T1, Depth = 2.7' Ave. Field Vane (tsf): 0.13	
-38.9	8.3		FAT CLAY, very stiff, little sand, fine grained, quartz, trace silt, silt increases with depth in layer, oxidation between 4.1' & 5.5', 2.5" sand pocket @ 6.1', 1.5" sand pocket @ 6.3', gray (2.5Y-5/1), (CH).		T2	Sample #T2, Depth = 5.3' Ave. Field Vane (tsf): 0.20	
-40.9	10.3		SAND, fine grained, quartz, some silt, trace clay, trace organics, trace wood fragments, 0.5" organic pockets @ 8.9' and 9.7', (0.5" x 1.0") wood fragment @ 8.9', 0.5" clay pocket @ 9.9', dark gray (2.5Y-4/1), (SM).		1	Sample #1, Depth = 9.4' Mean (mm): 0.10, Phi Sorting: 0.33 Fines (230): 28.84% Fines (200): 34.83% (SM)	
-42.9	12.3		LEAN CLAY, stiff, little sand, fine grained, quartz, trace organics, trace silt, sand increases with depth in layer, organics between 10.3' & 11.9', 2.0" sand pocket @ 11.8', gray (2.5Y-5/1), (CL).		T3	Sample #T3, Depth = 11.4' Ave. Field Vane (tsf): 0.15	
-44.3	13.7		SAND, fine grained, quartz, little silt, trace clay, clay distributed in pockets up to 0.5", dark gray (2.5Y-4/1), (SM).		2	Sample #2, Depth = 13.0' Mean (mm): 0.12, Phi Sorting: 0.38 Fines (230): 19.92% Fines (200): 23.66% (SM)	
-46.1	15.5		FAT CLAY, stiff, little sand, fine grained, quartz, trace silt, sand interbedded between 14.2' & 14.9', gray (2.5Y-5/1), (CH).		T4	Sample #T4, Depth = 14.0' Ave. Field Vane (tsf): 0.15	
-47.8	17.2		SAND, fine grained, quartz, trace clay, trace silt, clay distributed in pockets up to 0.5" between 15.5' & 15.9', dark gray (2.5Y-4/1), (SP-SM).		3	Sample #3, Depth = 16.4' Mean (mm): 0.11, Phi Sorting: 0.35 Fines (230): 4.12% Fines (200): 8.42% (SP-SM)	
-49.5	18.9		SAND, fine grained, quartz, little clay, trace silt, flaser bedding between 17.2' & 17.7', 0.75" clay pocket @ 18.5', Bit sample from 18.7' to 18.9', dark gray (2.5Y-4/1), (SC).				
-49.6	19.0		No recovery.				
			End of Boring				

REGION 1 RECON GEOTECH GP.1 3/25/24

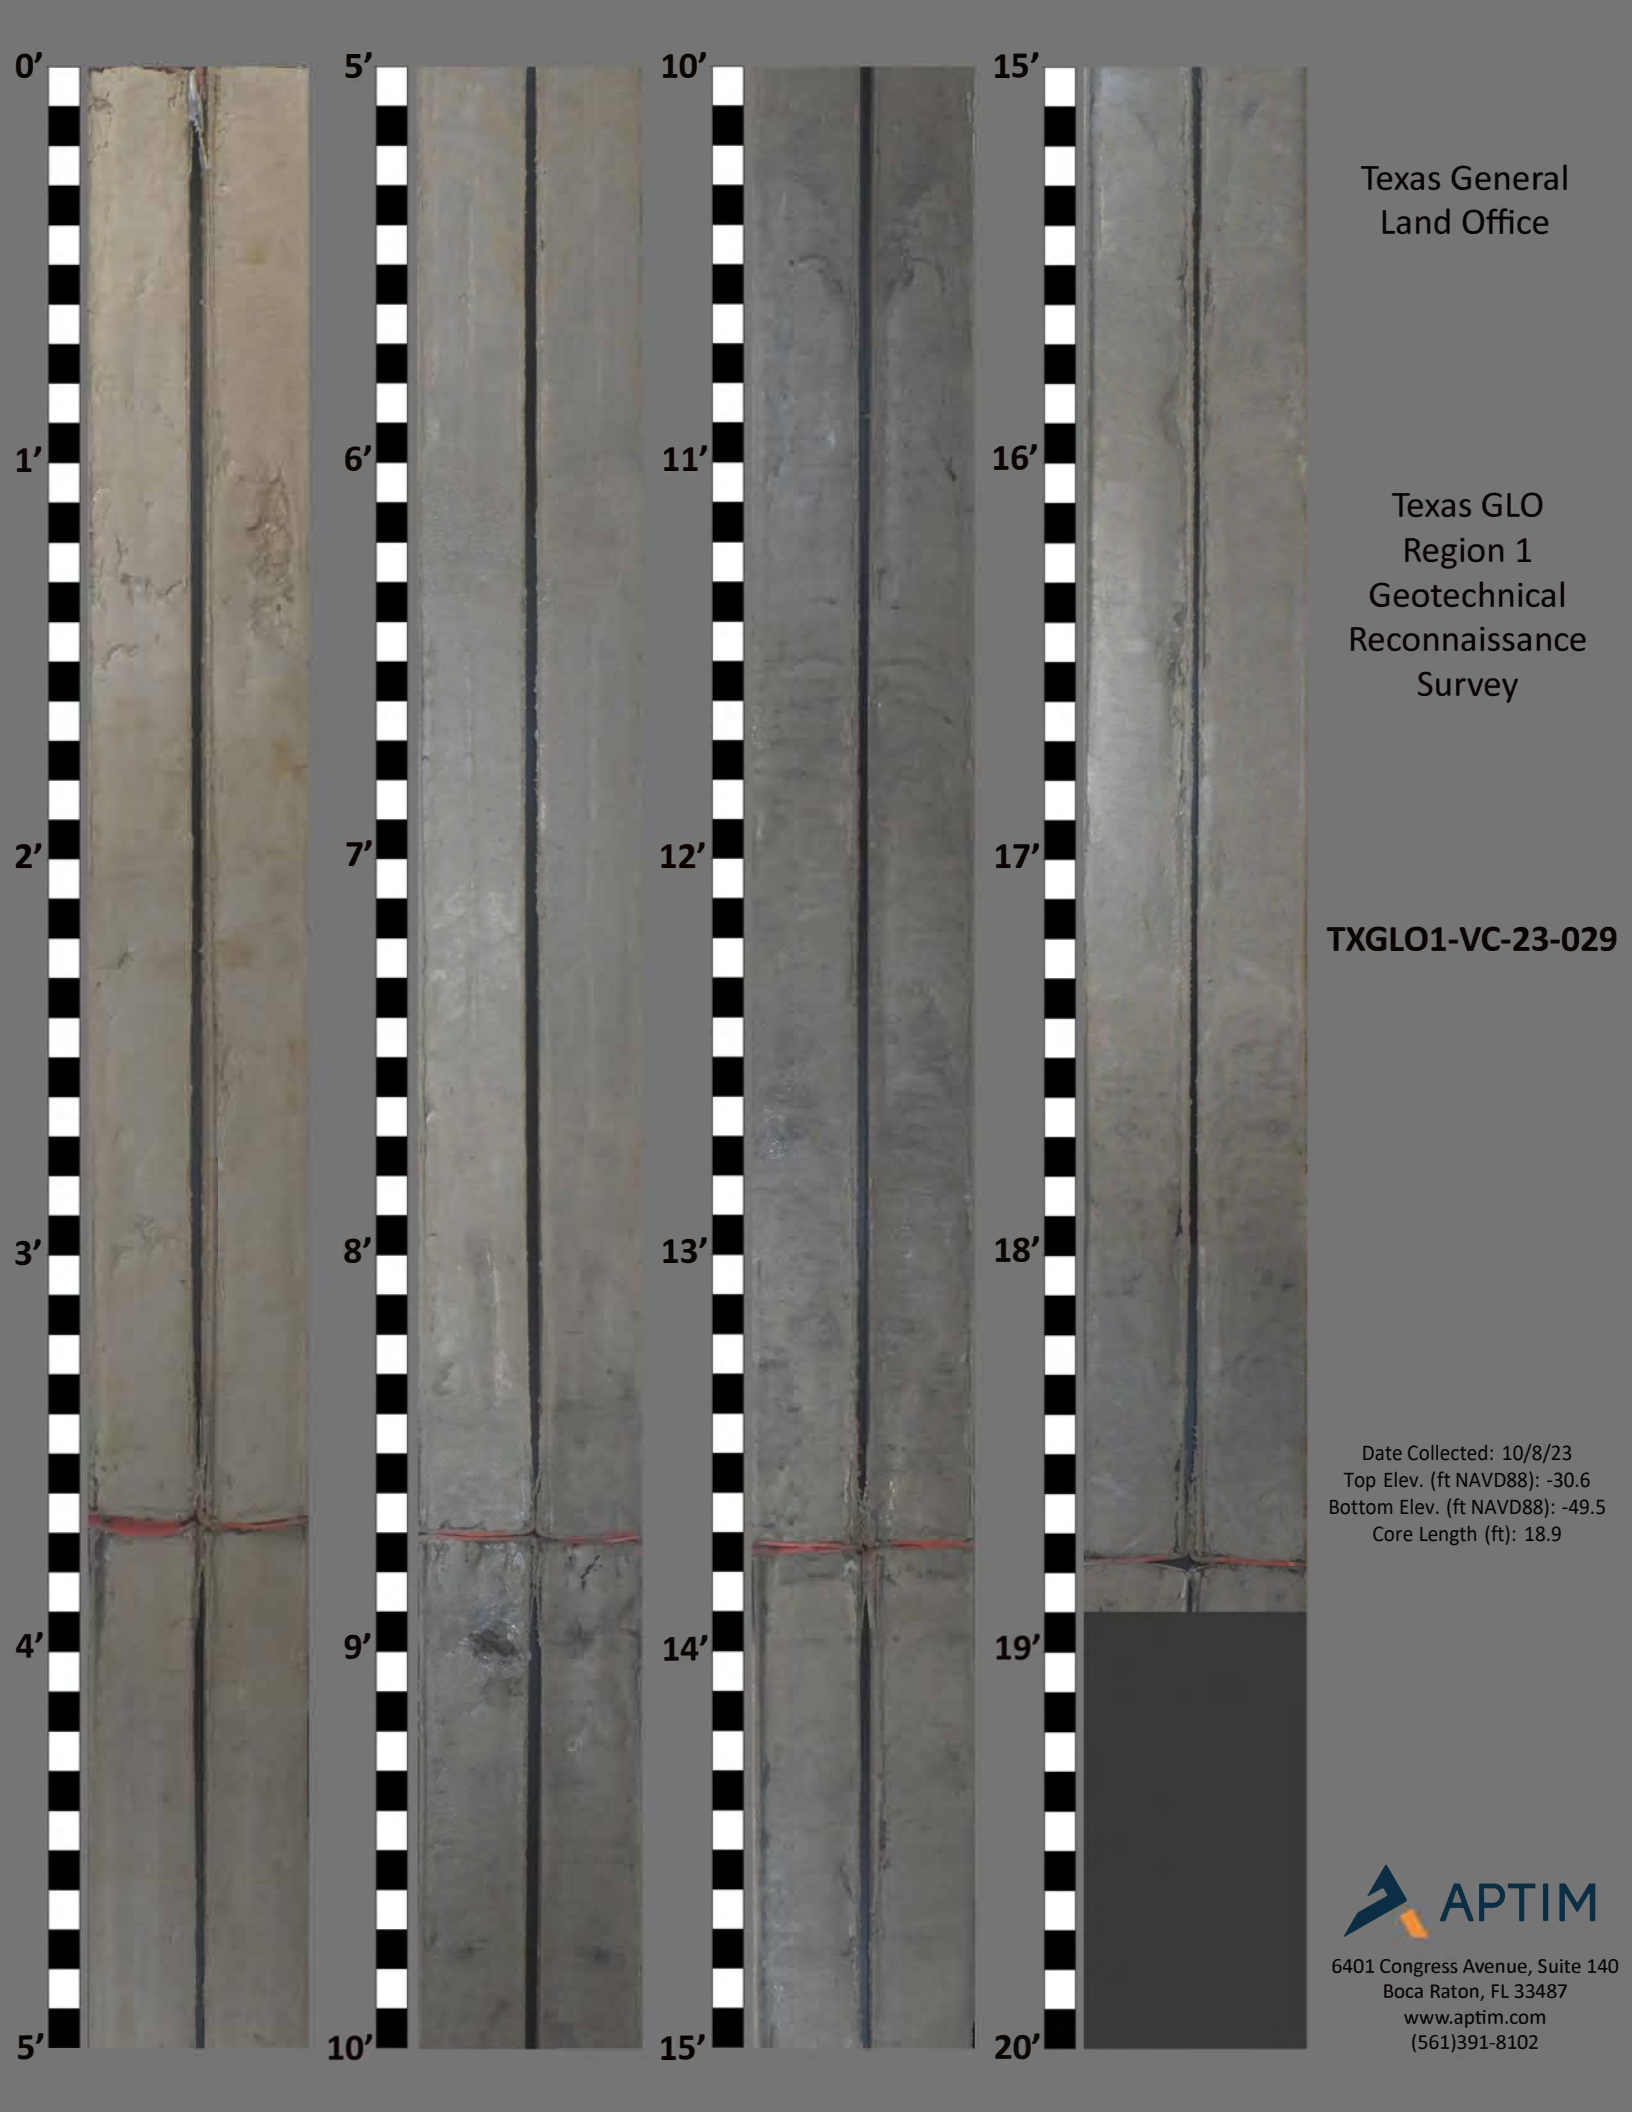

Texas General
Land Office

Texas GLO
Region 1
Geotechnical
Reconnaissance
Survey

TXGLO1-VC-23-029

Date Collected: 10/8/23
Top Elev. (ft NAVD88): -30.6
Bottom Elev. (ft NAVD88): -49.5
Core Length (ft): 18.9




6401 Congress Avenue, Suite 140
Boca Raton, FL 33487
www.aptim.com
(561)391-8102

Granularmetric Report				 APTIM 6401 Congress Avenue, Suite 140 Boca Raton, FL 33487 ph (561) 391-8102			
Depths and elevations based on measured values							
Project Name: TX GLO Region 1 Recon Geotechnical Sand Search							
Sample Name: TXGLO1-VC-23-029 #1							
Analysis Date: 01-25-24							
Analyzed By: SM							
Easting (ft):		Northing (ft):		Coordinate System:		Elevation (ft):	
3,447,747		13,764,694		Texas State Plane South		-40.0 NAVD88	
USCS:		Munsell: Wet - 2.5Y-4/1 Dry - 2.5Y-6/1 Washed - 2.5Y-7/1		Comments:			
SM							
Dry Weight (g):	Wash Weight (g):	Pan Retained (g):	Sieve Loss (%):	Fines (%):	Organics (%):	Carbonates (%):	Shell Hash (%):
98.54	74.94	4.80	0.01	#200 - 34.83 #230 - 28.84			
Sieve Number	Sieve Size (Phi)	Sieve Size (Millimeters)	Grams Retained	% Weight Retained	Cum. Grams Retained	C. % Weight Retained	
3/4"	-4.25	19.03	0.00	0.00	0.00	0.00	
5/8"	-4.00	16.00	0.00	0.00	0.00	0.00	
7/16"	-3.50	11.31	0.00	0.00	0.00	0.00	
5/16"	-3.00	8.00	0.00	0.00	0.00	0.00	
3.5	-2.50	5.66	0.00	0.00	0.00	0.00	
4	-2.25	4.76	0.00	0.00	0.00	0.00	
5	-2.00	4.00	0.00	0.00	0.00	0.00	
7	-1.50	2.83	0.00	0.00	0.00	0.00	
10	-1.00	2.00	0.01	0.01	0.01	0.01	
14	-0.50	1.41	0.00	0.00	0.01	0.01	
18	0.00	1.00	0.00	0.00	0.01	0.01	
25	0.50	0.71	0.02	0.02	0.03	0.03	
35	1.00	0.50	0.02	0.02	0.05	0.05	
45	1.50	0.35	0.03	0.03	0.08	0.08	
60	2.00	0.25	0.05	0.05	0.13	0.13	
80	2.50	0.18	0.27	0.27	0.40	0.40	
120	3.00	0.13	12.08	12.26	12.48	12.66	
170	3.50	0.09	42.14	42.76	54.62	55.42	
200	3.75	0.07	9.61	9.75	64.23	65.17	
230	4.00	0.06	5.90	5.99	70.13	71.16	
Phi 5	Phi 16	Phi 25	Phi 50	Phi 75	Phi 84	Phi 95	
			3.44	3.14	3.04	2.69	
Moment	Mean Phi	Mean mm	Sorting	Skewness	Kurtosis		
Statistics	3.26	0.10	0.33	-0.88	11.22		

Granularmetric Report				 APTIM 6401 Congress Avenue, Suite 140 Boca Raton, FL 33487 ph (561) 391-8102			
Depths and elevations based on measured values							
Project Name: TX GLO Region 1 Recon Geotechnical Sand Search							
Sample Name: TXGLO1-VC-23-029 #2							
Analysis Date: 01-25-24							
Analyzed By: SM							
Easting (ft):		Northing (ft):		Coordinate System:		Elevation (ft):	
3,447,747		13,764,694		Texas State Plane South		-43.6 NAVD88	
USCS:		Munsell:		Comments:			
SM		Wet - 2.5Y-4/1 Dry - 2.5Y-6/1 Washed - 2.5Y-7/1					
Dry Weight (g):	Wash Weight (g):	Pan Retained (g):	Sieve Loss (%):	Fines (%):	Organics (%):	Carbonates (%):	Shell Hash (%):
101.39	84.04	2.84	0.00	#200 - 23.66 #230 - 19.92			
Sieve Number	Sieve Size (Phi)	Sieve Size (Millimeters)	Grams Retained	% Weight Retained	Cum. Grams Retained	C. % Weight Retained	
3/4"	-4.25	19.03	0.00	0.00	0.00	0.00	
5/8"	-4.00	16.00	0.00	0.00	0.00	0.00	
7/16"	-3.50	11.31	0.00	0.00	0.00	0.00	
5/16"	-3.00	8.00	0.00	0.00	0.00	0.00	
3.5	-2.50	5.66	0.00	0.00	0.00	0.00	
4	-2.25	4.76	0.00	0.00	0.00	0.00	
5	-2.00	4.00	0.00	0.00	0.00	0.00	
7	-1.50	2.83	0.00	0.00	0.00	0.00	
10	-1.00	2.00	0.01	0.01	0.01	0.01	
14	-0.50	1.41	0.00	0.00	0.01	0.01	
18	0.00	1.00	0.02	0.02	0.03	0.03	
25	0.50	0.71	0.01	0.01	0.04	0.04	
35	1.00	0.50	0.03	0.03	0.07	0.07	
45	1.50	0.35	0.02	0.02	0.09	0.09	
60	2.00	0.25	0.08	0.08	0.17	0.17	
80	2.50	0.18	2.82	2.78	2.99	2.95	
120	3.00	0.13	31.80	31.36	34.79	34.31	
170	3.50	0.09	35.58	35.09	70.37	69.40	
200	3.75	0.07	7.04	6.94	77.41	76.34	
230	4.00	0.06	3.79	3.74	81.20	80.08	
Phi 5	Phi 16	Phi 25	Phi 50	Phi 75	Phi 84	Phi 95	
		3.70	3.22	2.85	2.71	2.53	
Moment	Mean Phi	Mean mm	Sorting	Skewness	Kurtosis		
Statistics	3.08	0.12	0.38	-0.42	6.92		

Granularmetric Report				 APTIM 6401 Congress Avenue, Suite 140 Boca Raton, FL 33487 ph (561) 391-8102			
Depths and elevations based on measured values							
Project Name: TX GLO Region 1 Recon Geotechnical Sand Search							
Sample Name: TXGLO1-VC-23-029 #3							
Analysis Date: 01-25-24							
Analyzed By: SM							
Easting (ft):		Northing (ft):		Coordinate System:		Elevation (ft):	
3,447,747		13,764,694		Texas State Plane South		-47.0 NAVD88	
USCS:		Munsell:		Comments:			
SP-SM		Wet - 2.5Y-4/1 Dry - 2.5Y-6/1 Washed - 2.5Y-7/1					
Dry Weight (g):	Wash Weight (g):	Pan Retained (g):	Sieve Loss (%):	Fines (%):	Organics (%):	Carbonates (%):	Shell Hash (%):
94.68	93.32	2.53	0.01	#200 - 8.42 #230 - 4.12			
Sieve Number	Sieve Size (Phi)	Sieve Size (Millimeters)	Grams Retained	% Weight Retained	Cum. Grams Retained	C. % Weight Retained	
3/4"	-4.25	19.03	0.00	0.00	0.00	0.00	
5/8"	-4.00	16.00	0.00	0.00	0.00	0.00	
7/16"	-3.50	11.31	0.00	0.00	0.00	0.00	
5/16"	-3.00	8.00	0.00	0.00	0.00	0.00	
3.5	-2.50	5.66	0.00	0.00	0.00	0.00	
4	-2.25	4.76	0.00	0.00	0.00	0.00	
5	-2.00	4.00	0.00	0.00	0.00	0.00	
7	-1.50	2.83	0.00	0.00	0.00	0.00	
10	-1.00	2.00	0.00	0.00	0.00	0.00	
14	-0.50	1.41	0.00	0.00	0.00	0.00	
18	0.00	1.00	0.00	0.00	0.00	0.00	
25	0.50	0.71	0.01	0.01	0.01	0.01	
35	1.00	0.50	0.00	0.00	0.01	0.01	
45	1.50	0.35	0.00	0.00	0.01	0.01	
60	2.00	0.25	0.05	0.05	0.06	0.06	
80	2.50	0.18	2.69	2.84	2.75	2.90	
120	3.00	0.13	26.02	27.48	28.77	30.38	
170	3.50	0.09	49.21	51.98	77.98	82.36	
200	3.75	0.07	8.73	9.22	86.71	91.58	
230	4.00	0.06	4.07	4.30	90.78	95.88	
Phi 5	Phi 16	Phi 25	Phi 50	Phi 75	Phi 84	Phi 95	
3.95	3.54	3.43	3.19	2.90	2.74	2.54	
Moment	Mean Phi	Mean mm	Sorting	Skewness	Kurtosis		
Statistics	3.14	0.11	0.35	-0.29	3.56		

REGION1_RECON_GEOTECH.GPJ 3/6/24

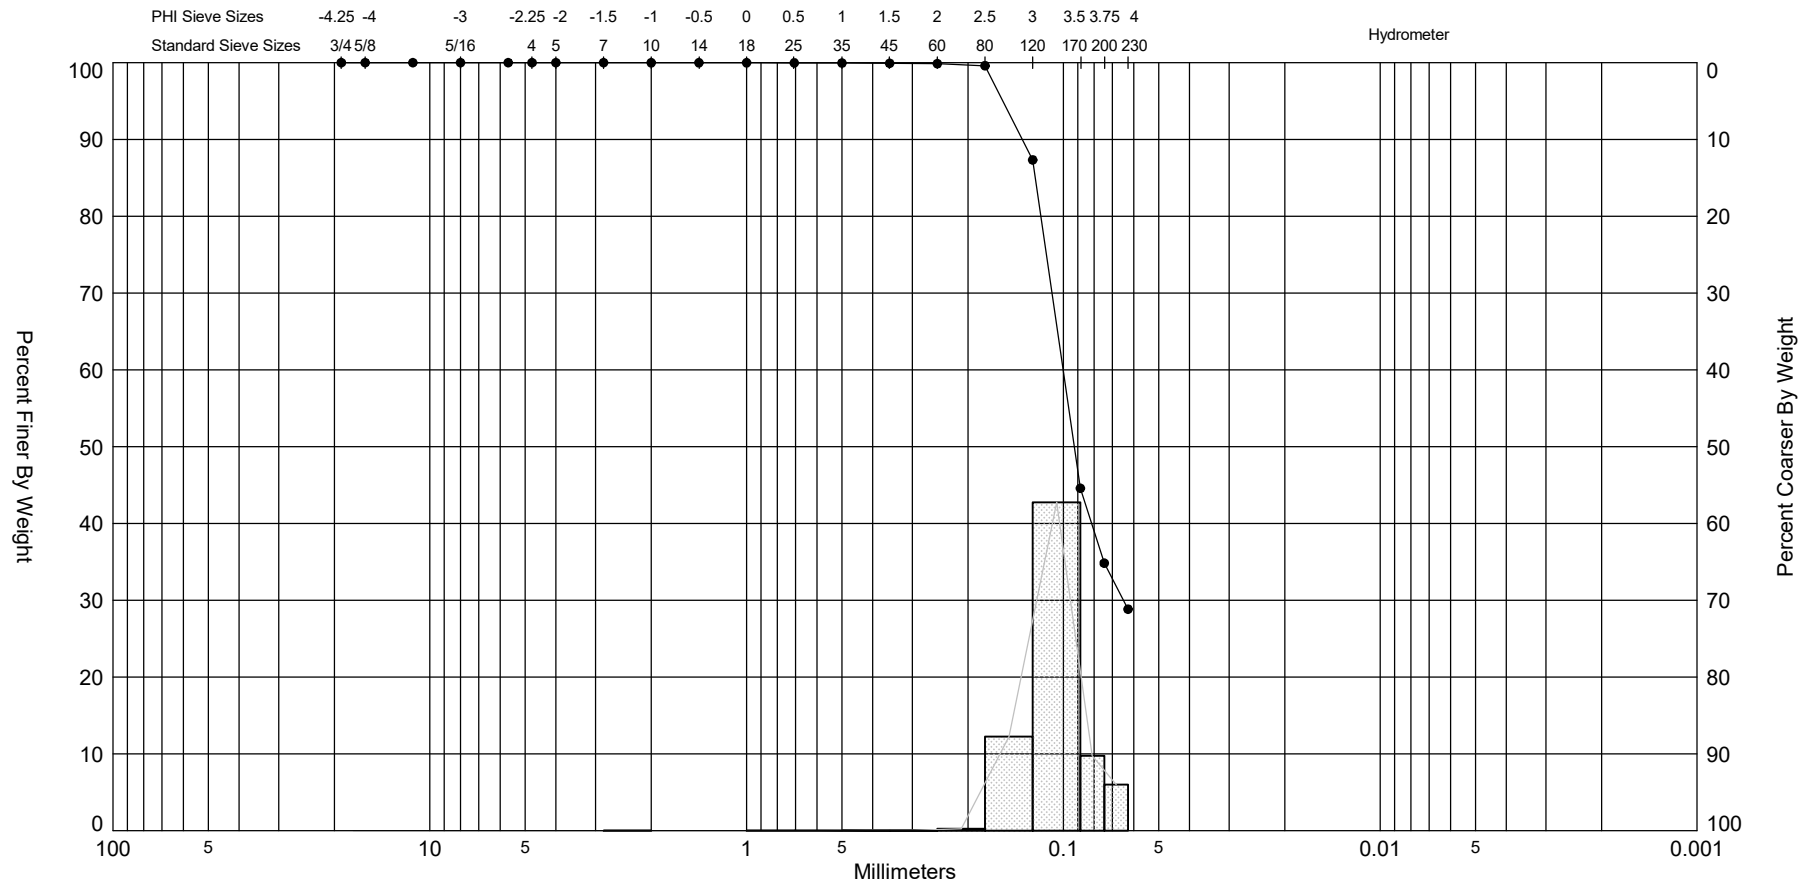


Sample	Symbol	Elev. (ft)	USCS	% Fines	% Organics	% Carbonates	Median	Mean	Skew	Kurt	Sort	Sample Information	
TXGLO1-VC-23-029 #1	—●—	-40.0	SM	#200 - 34.83 #230 - 28.84			3.44	3.26	-0.88	11.22	0.33	Project Name:	TX GLO Region 1 Recon Geotechnical Sand Search
Comments:												Analysis Date:	01-25-24
Depths and elevations based on measured values												Analyzed By:	SM
							APTIM 6401 Congress Avenue, Suite 140 Boca Raton, FL 33487 ph (561) 391-8102					Easting (X, ft):	3,447,747
												Northing (Y, ft):	13,764,694
												Horizontal Datum:	NAD 1983
												Vertical Datum:	NAVD88



Sample	Symbol	Elev. (ft)	USCS	% Fines	% Organics	% Carbonates	Median	Mean	Skew	Kurt	Sort	Sample Information	
TXGLO1-VC-23-029 #2		-43.6	SM	#200 - 23.66 #230 - 19.92			3.22	3.08	-0.42	6.92	0.38	Project Name:	TX GLO Region 1 Recon Geotechnical Sand Search
Comments:												Analysis Date:	01-25-24
Depths and elevations based on measured values												Analyzed By:	SM
						APTIM 6401 Congress Avenue, Suite 140 Boca Raton, FL 33487 ph (561) 391-8102						Easting (X, ft):	3,447,747
												Northing (Y, ft):	13,764,694
												Horizontal Datum:	NAD 1983
												Vertical Datum:	NAVD88

REGION1_RECON_GEOTECH.GPJ 3/6/24

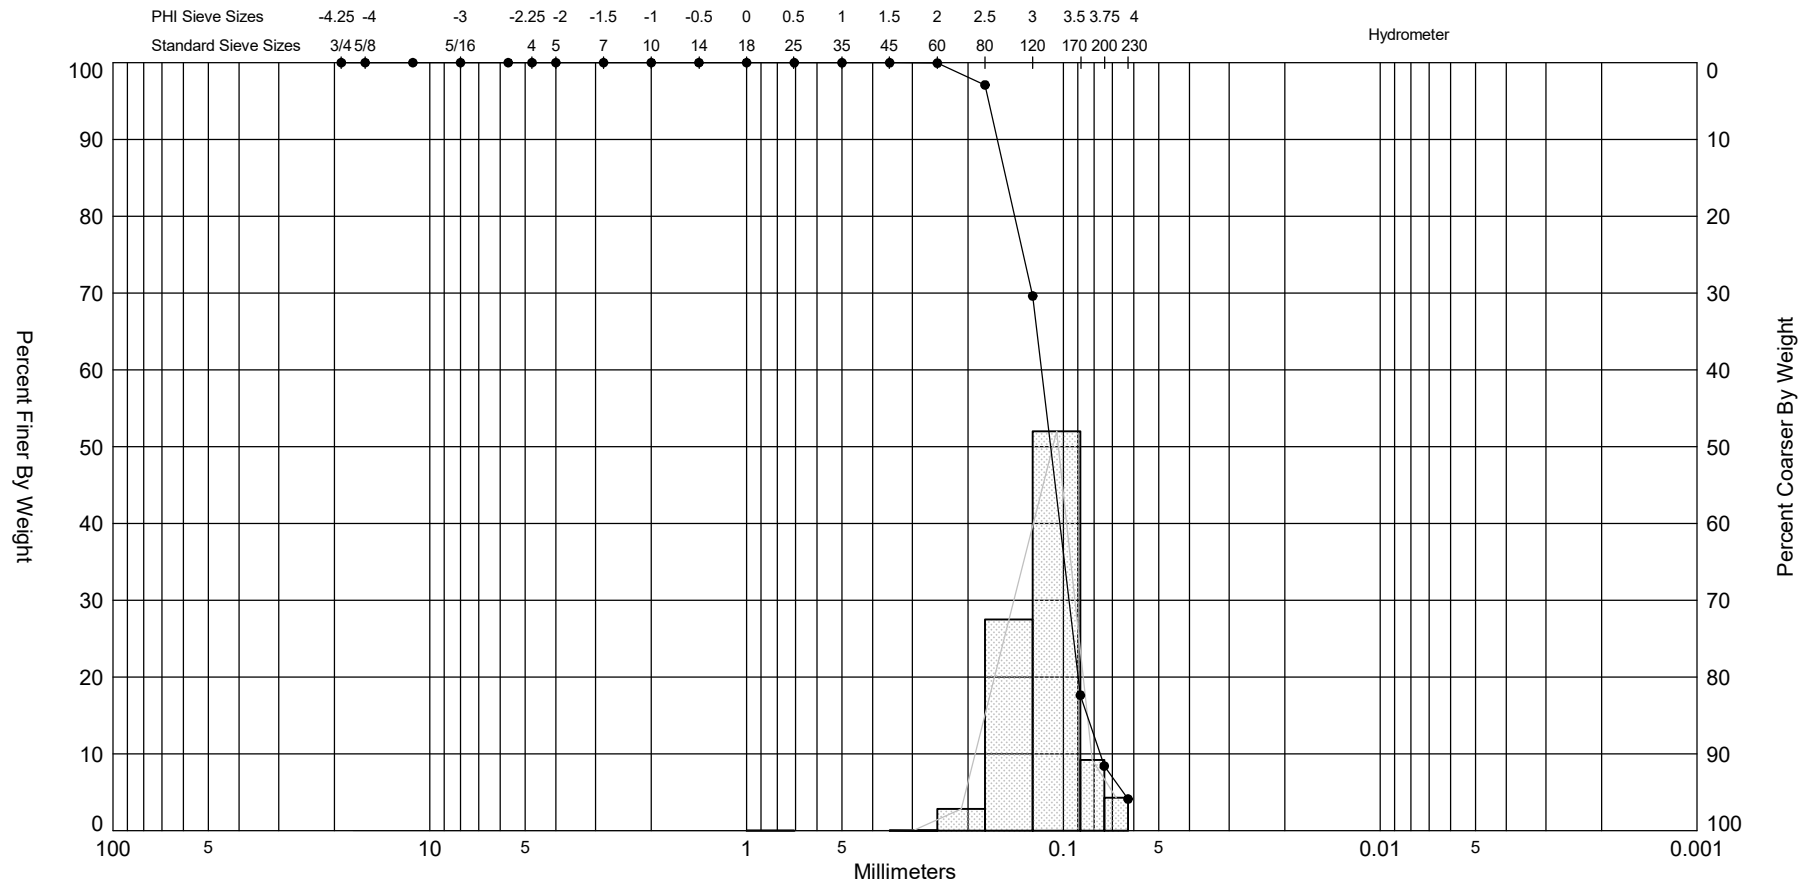

Gravel		Sand			Silt and Clay
Coarse	Fine	Coarse	Medium	Fine	

Sample	Symbol	Elev. (ft)	USCS	% Fines	% Organics	% Carbonates	Median	Mean	Skew	Kurt	Sort	Sample Information	
TXGLO1-VC-23-029 #3	—●—	-47.0	SP-SM	#200 - 8.42 #230 - 4.12			3.19	3.14	-0.29	3.56	0.35	Project Name:	TX GLO Region 1 Recon Geotechnical Sand Search
Comments:												Analysis Date:	01-25-24
Depths and elevations based on measured values												Analyzed By:	SM
							APTIM 6401 Congress Avenue, Suite 140 Boca Raton, FL 33487 ph (561) 391-8102					Easting (X, ft):	3,447,747
												Northing (Y, ft):	13,764,694
												Horizontal Datum:	NAD 1983
												Vertical Datum:	NAVD88



Mini Vane Shear Test Results

CORE ID	SAMPLE DEPTH (ft)	TORVANE (kg/cm ²)	TORVANE (tsf)	TORVANE (kpa)	DESCRIPTION ¹
TXGLO1-VC-23-029	2.7	1.3	0.13	122.58	Stiff
	5.3	2.0	0.20	196.13	Very Stiff
	11.4	1.5	0.15	147.10	Stiff
	14.0	1.5	0.15	147.10	Stiff
TXGLO1-VC-23-030	No Torvane Conducted				
TXGLO1-VC-23-031	0.5	4.8	0.49	465.82	Hard
	3.4	4.3	0.44	416.78	Hard
	7.1	6.0	0.61	588.40	Hard
	11.9	5.5	0.56	539.37	Hard
	15.8	3.5	0.36	343.23	Hard
TXGLO1-VC-23-032	2.5	3.0	0.31	294.20	Very Stiff
	6.0	5.0	0.51	490.33	Hard
	10.7	2.5	0.26	245.17	Very Stiff
	14.6	6.5	0.67	637.43	Hard
	16.0	5.5	0.56	539.37	Hard
	17.8	8.0	0.82	784.53	Hard
TXGLO1-VC-23-033	0.6	1.0	0.10	98.07	Stiff
	1.2	4.0	0.41	392.27	Hard
	4.1	6.0	0.61	588.40	Hard
	8.2	4.5	0.46	441.30	Hard
	11.7	4.0	0.41	392.27	Hard
TXGLO1-VC-23-034	2.0	4.5	0.46	441.30	Hard
	4.1	5.0	0.51	490.33	Hard
	7.1	4.0	0.41	392.27	Hard
	10.1	3.8	0.38	367.75	Hard
	13.4	4.2	0.43	411.88	Hard
	15.6	4.5	0.46	441.30	Hard
	18.2	4.0	0.41	392.27	Hard
TXGLO1-VC-23-035	2.2	3.0	0.31	294.20	Very Stiff
	5.0	4.0	0.41	392.27	Hard
	7.5	5.0	0.51	490.33	Hard
	18.0	5.5	0.56	539.37	Hard
TXGLO1-VC-23-036	3.0	1.0	0.10	98.07	Stiff
	8.0	0.8	0.08	73.55	Firm
	17.8	4.5	0.46	441.30	Hard
TXGLO1-VC-23-037	1.0	2.8	0.28	269.68	Very Stiff
	5.0	4.0	0.41	392.27	Hard
	7.2	2.5	0.26	245.17	Very Stiff
	11.5	1.5	0.15	147.10	Stiff
	15.5	2.5	0.26	245.17	Very Stiff