

October 16, 2006
 Attn.: Mr. Josh Carter
 RETL Job No.: G106505

PROPOSED SAN LUIS PASS PROJECT PHASE 2
 West Galveston Bay
 Freeport, Texas

The results of these tests are to be found on the boring logs and grain size distribution curves attached to this report and in the following tables.

	BORING C01		BORING C02		BORING C03		
SIEVE SIZE	0-2.5'	5'-7.5'	2.5'-5'	7.5'-10'	0-2.5'	5'-7.5'	10'-12.5'
#10	100	100	100	100	100	100	100
#20	100	100	100	100	100	100	100
#40	100	100	100	100	100	99	100
#60	99	100	100	100	100	99	100
#70	99	99	99	100	100	98	100
#80	99	98	99	98	100	97	98
#100	84	70	79	69	93	84	88
#120	47	23	34	35	42	47	52
#140	23	11	14	20	19	23	25
#200	2.9	2.5	3.8	9.3	3.9	4.3	5.3
#230	2.1	2.1	3.1	7.4	3.2	3.5	4.1
Color	2.5Y 5/4	2.5Y 5/2	2.5Y 2.5/1	2.5Y 3/1	2.5Y 5/3	2.5Y 6/2	2.5Y 4/4
Description	Lt. Olive Brown	Gray Brown	Black	Vry. Dk. Gray	Lt. Olive Brown	Lt. Brown Gray	Olive Brown

	BORING C04		BORING C05		
SIEVE SIZE	2.5'-5'	7.5'-10'	0-2.5'	5'-7.5'	10'-12.5'
#10	100	100	100	100	99
#20	100	100	100	100	99
#40	99	100	100	100	98
#60	99	100	100	100	97
#70	98	99	99	99	96
#80	96	97	96	97	92
#100	82	71	48	72	60
#120	38	38	20	31	24
#140	18	23	11	17	12
#200	3.0	6.1	3.1	4.6	4.4
#230	2.2	4.9	2.7	3.7	3.8
Color	2.5Y 6/2	2.5Y 6/2	2.5Y 4/2	2.5Y 4/2	2.5Y 6/2
Description	Lt. Brown Gray	Lt Brown Gray	Dk. Gray Brown	Dk Brown Gray	Lt Brown Gray

LOG OF BORING C-02

SHEET 1 of 1



Rock Engineering & Testing Laboratory
4910 Neptune Street
Corpus Christi, TX 78405
Telephone: 361-883-4555
Fax: 361-883-4711

CLIENT: Coast and Harbor Engineering, Inc.
PROJECT: Proposed San Luis Pass Project Phase 2
LOCATION: W. Galveston Bay; Freeport, Texas
NUMBER: G106505

DATE(S) DRILLED: 9/2206 - 9/2206

DRILLING METHOD(S):
Disturbed Samples

GROUNDWATER INFORMATION:
Boring Performed in water approximately 2 to 3 feet in depth.

SURFACE ELEVATION: N/A

DESCRIPTION OF STRATUM

POORLY GRADED SAND 2.5Y 2.5/1 black.

Same as above, 2.5Y 2.5/1 black.

Same as above, 2.5Y 3/2 very dark gray brown.


POORLY GRADED SAND, 2.5Y 3/1 very dark gray.

Boring terminated at a depth of 10' below the bay bottom.

N - STANDARD PENETRATION TEST RESISTANCE
P - POCKET PENETROMETER RESISTANCE
T - POCKET TORVANE SHEAR STRENGTH

REMARKS:

Soil Sampling performed by RETL at N29.0989 deg W95.1273 deg

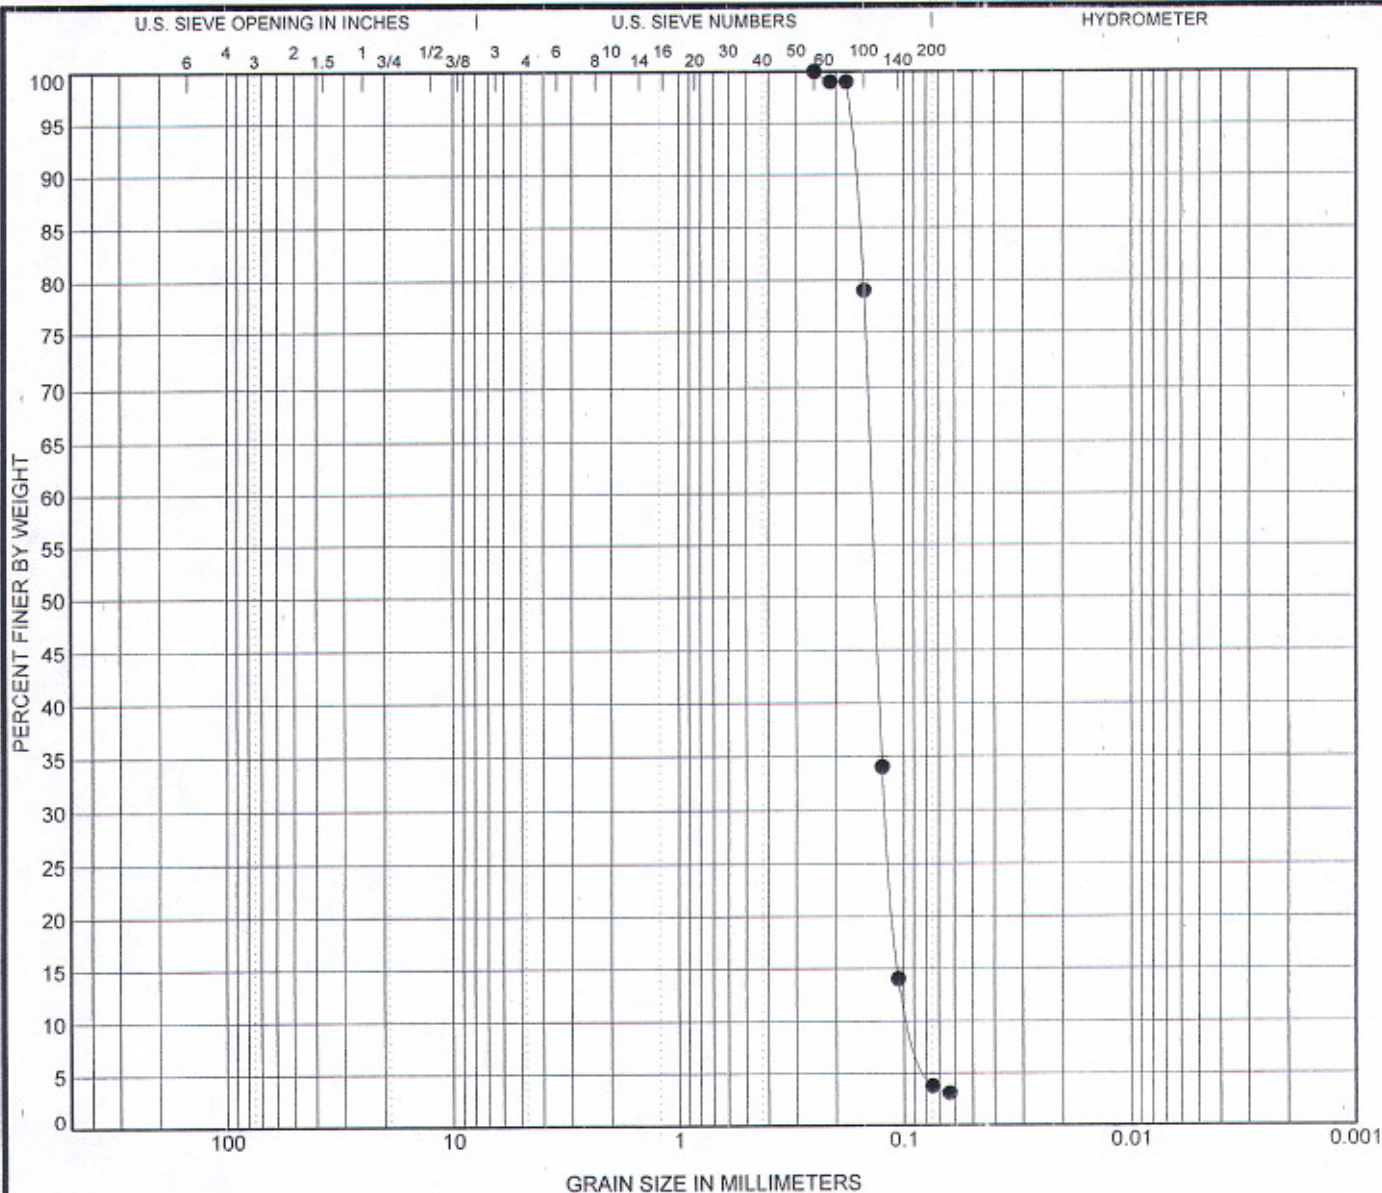

COBBLES	GRAVEL		SAND			SILT OR CLAY
	coarse	fine	coarse	medium	fine	

Specimen Identification	Classification	LL	PL	PI	Cc	Cu
● C-02 2.5	POORLY GRADED SAND(SP)				1.14	1.50

Specimen Identification	D100	D60	D30	D10	%Gravel	%Sand	%Silt	%Clay
● C-02 2.5	0.25	0.139	0.121	0.093	0.0	96.2	3.8	

GRAIN SIZE DISTRIBUTION


Project: Proposed San Luis Pass Project Phase 2

Location: W. Galveston Bay, Freeport, Texas

Number: G106505



Rock Engineering & Testing Laboratory
4910 Neptune Street
Corpus Christi, TX 78405
Telephone: 361-883-4555
Fax: 361-883-4711

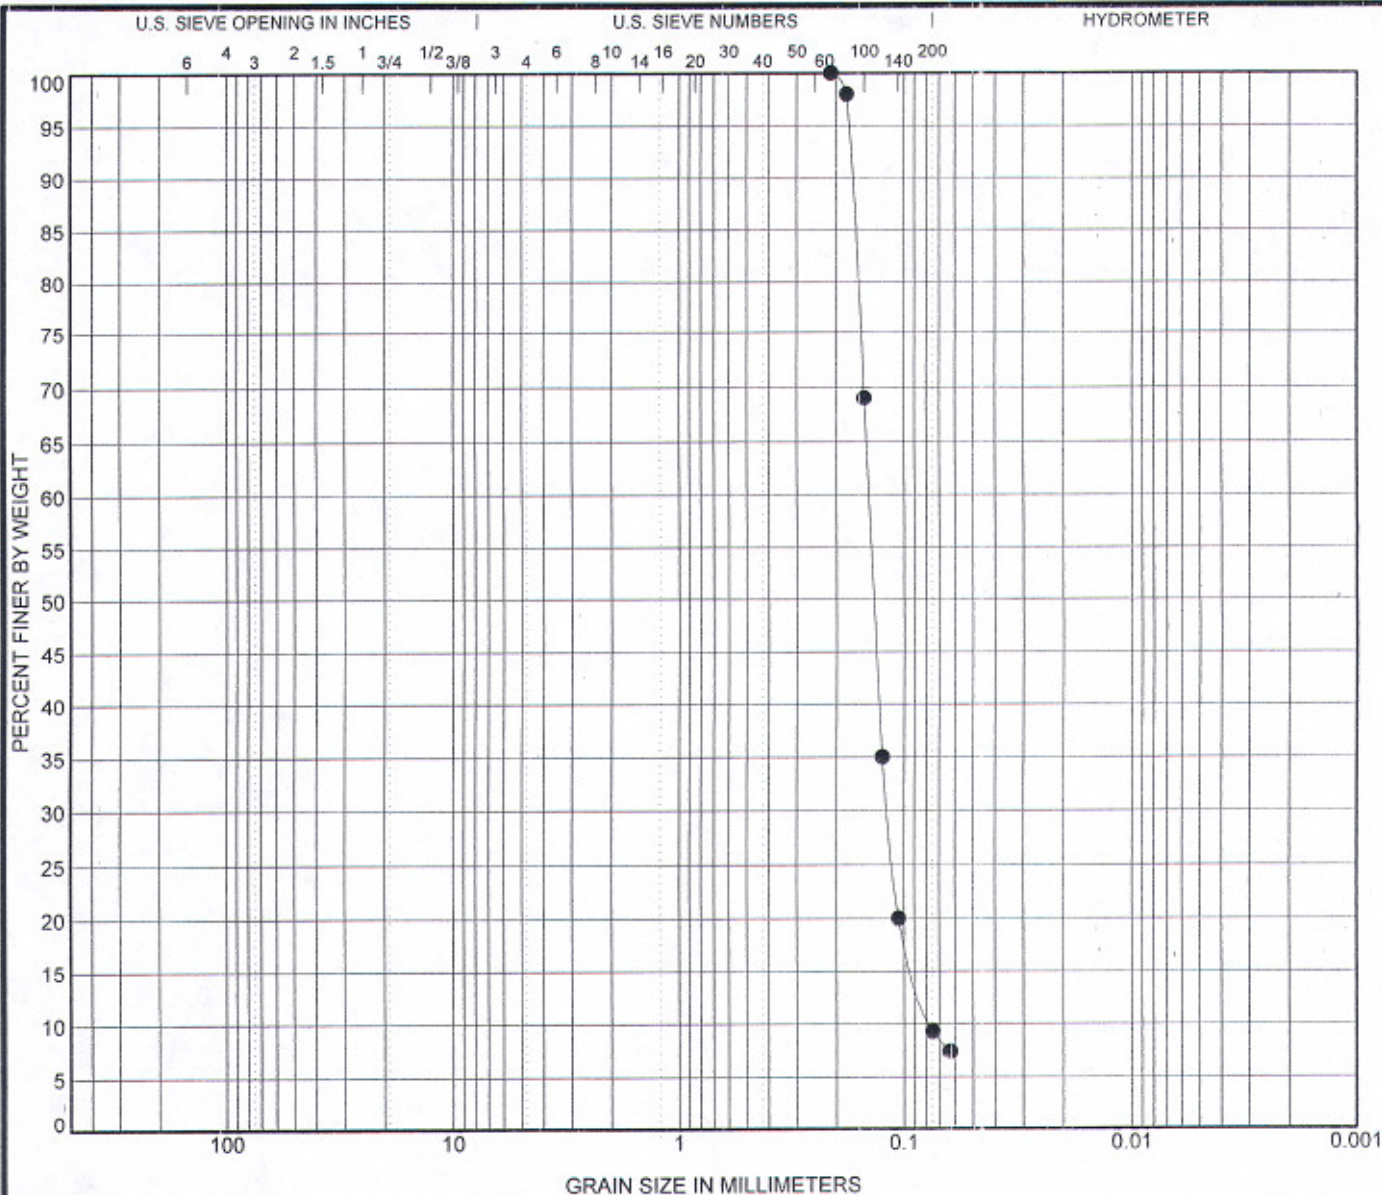

COBBLES	GRAVEL		SAND			SILT OR CLAY
	coarse	fine	coarse	medium	fine	

Specimen Identification	Classification	LL	PL	PI	Cc	Cu
● C-02 7.5					1.28	1.86

Specimen Identification	D100	D60	D30	D10	%Gravel	%Sand	%Silt	%Clay
● C-02 7.5	0.212	0.143	0.118	0.077	0.0	90.7	9.3	



Rock Engineering & Testing Laboratory
4910 Neptune Street
Corpus Christi, TX 78405
Telephone: 361-883-4555
Fax: 361-883-4711

GRAIN SIZE DISTRIBUTION

Project: Proposed San Luis Pass Project Phase 2

Location: W. Galveston Bay; Freeport, Texas

Number: G106505