



- Geotechnical Engineering
- Construction Materials Testing

PROJECT NAME: Anchorage Basin Sand Source Investigation

CLIENT: HDR Engineering, Inc.

BORING ID.: AA-04


DESCRIPTION: Anchorage Basin Borrow Source Area

PERCENT SHELL BY WEIGHT (BASED ON #10 SIEVE)				
-26' to -27' NAVD	-32' to -33' NAVD	-35' to -36' NAVD	-38' to -39' NAVD	-40' to -41' NAVD
N/A	0.01	0.11	0.00	0.02

ASTM MESH	% FINER BY WEIGHT AFTER REMOVING SHELL				
	-26' to -27' NAVD	-32' to -33' NAVD	-35' to -36' NAVD	-38' to -39' NAVD	-40' to -41' NAVD
#10	N/A	100.00	100.00	100.00	100.00
#18	N/A	99.96	99.64	99.97	99.95
#35	N/A	99.92	99.05	99.89	99.88
#60	N/A	99.68	95.48	98.71	99.75
#70	N/A	97.85	80.15	93.92	99.62
#100	N/A	27.90	17.11	28.51	96.19
#120	N/A	11.35	7.96	8.98	87.46
#170	N/A	3.08	4.70	1.99	79.73
#200	82.10	1.80	4.02	1.25	77.00
STATISTICS (EXCLUDING SHELL)					
MEDIAN GRAIN SIZE (mm)	N/A	0.17	0.18	0.18	N/A
MEAN GRAIN SIZE (mm)	N/A	0.17	0.18	0.17	N/A
SORTING (σ)	N/A	0.24	0.30	0.19	N/A

*AA-04; -26' to -27' NAVD was only passed through the -#200 sieve.

*The -#10 material was utilized as the total sample for Grain Size Distribution Curve calculations.

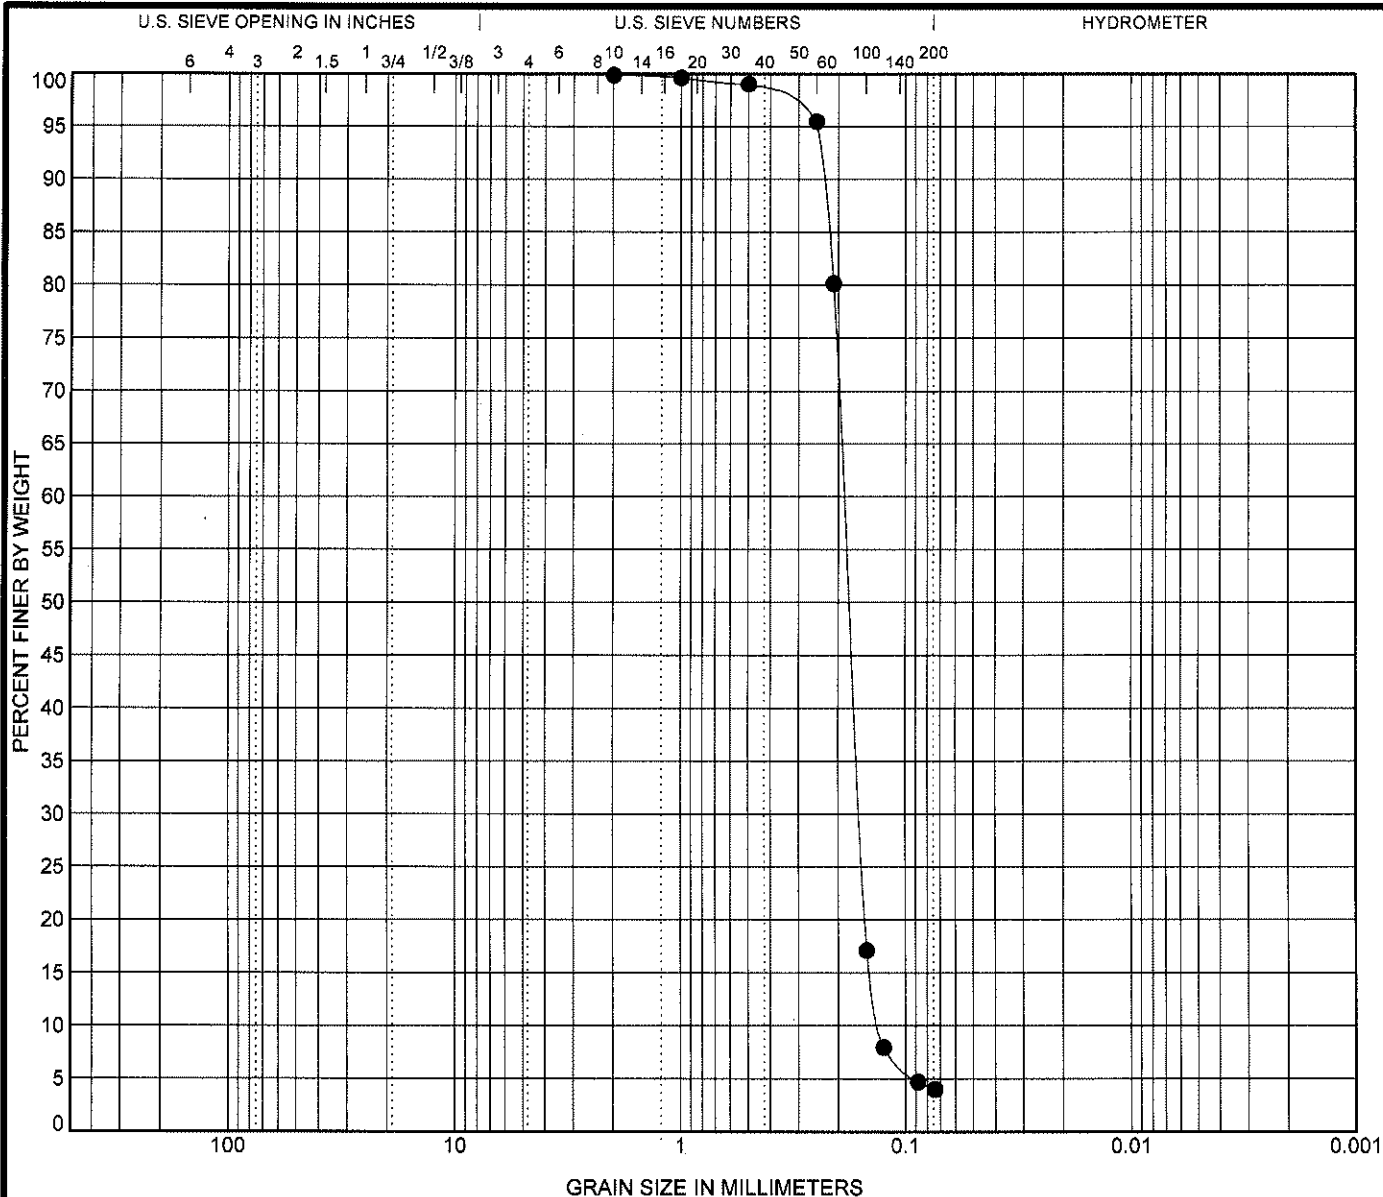

COBBLES	GRAVEL		SAND			SILT OR CLAY
	coarse	fine	coarse	medium	fine	

Specimen ID	Depth	Classification	LL	PL	PI	Cc	Cu
● AA-04	(-35' to -36' NAVD)	Borrow Area (-35' to -36' NAVD)				1.04	1.45


Specimen ID	Depth	D100	D60	D30	D10	%Gravel	%Sand	%Silt	%Clay
● AA-04	(-35' to -36' NAVD)	2	0.188	0.16	0.13	0.0			



Rock Engineering & Testing Lab., Inc.
6817 Leopard St.
Corpus Christi, TX 78409
Telephone: (361) 883-4555
Fax: (361) 883-4711

GRAIN SIZE DISTRIBUTION

Project: Anchorage Basin Sand Source Investigation
Location: Anchorage Basin; Galveston, Texas
Number: G109112

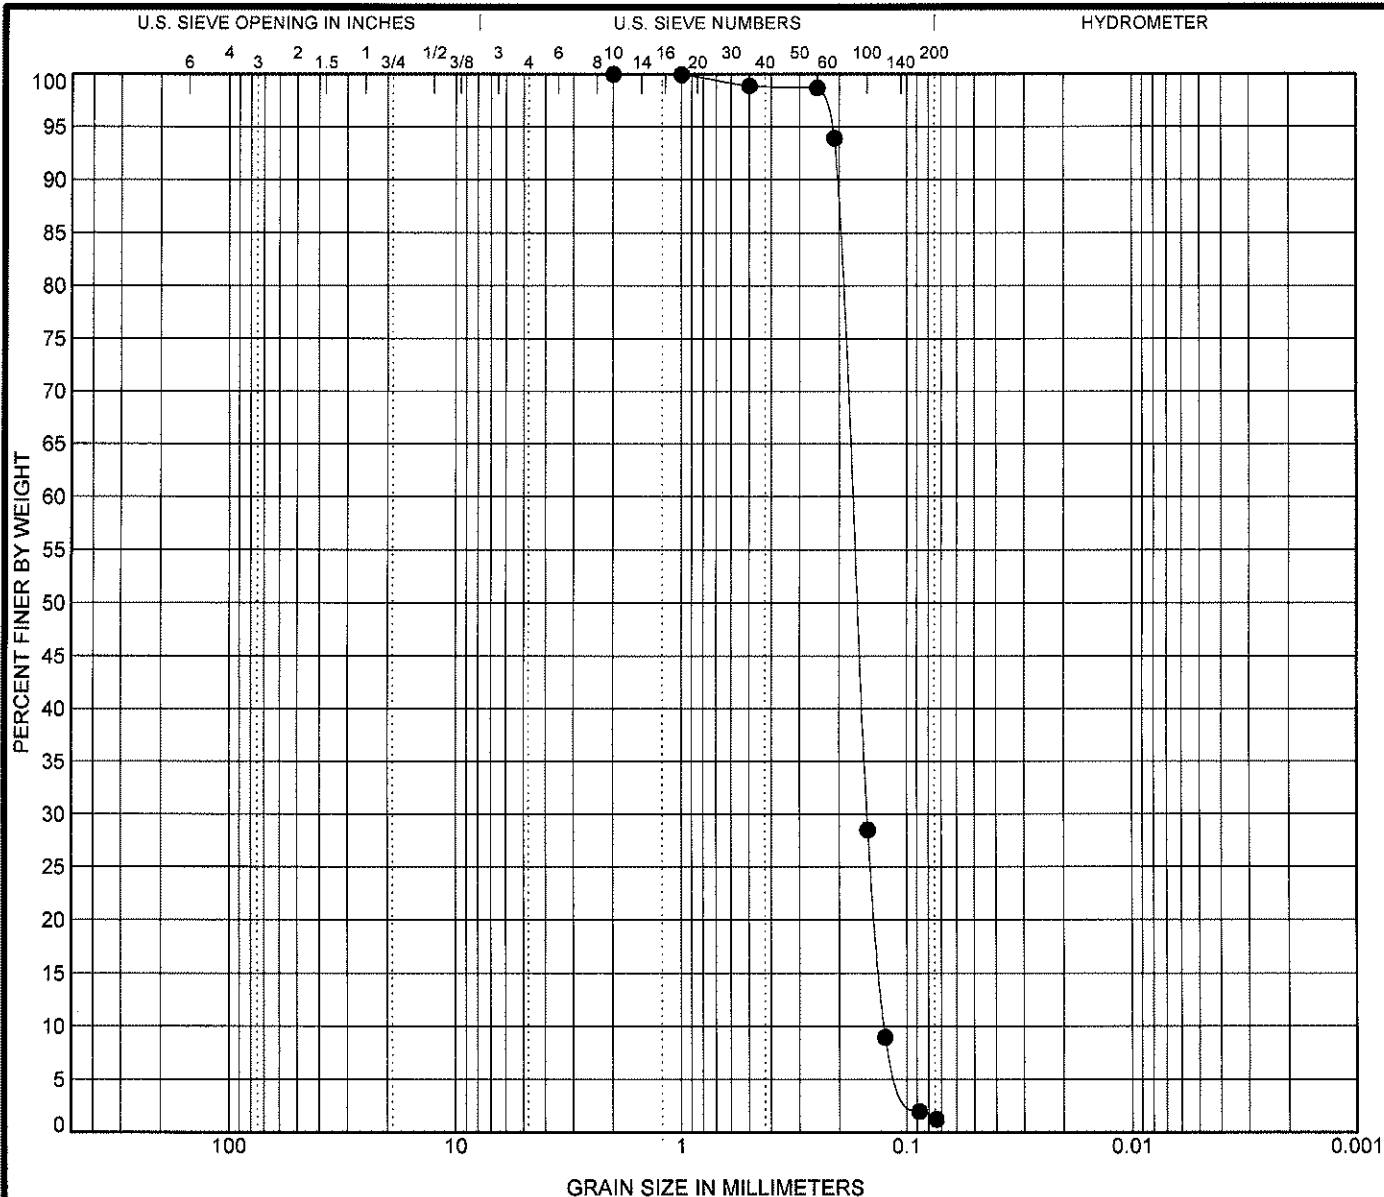

COBBLES	GRAVEL		SAND			SILT OR CLAY
	coarse	fine	coarse	medium	fine	

Specimen ID	Depth	Classification	LL	PL	PI	Cc	Cu
● AA-04	(-38' to -39' NAVD)	Borrow Area (-38' to -39' NAVD)				1.02	1.39


Specimen ID	Depth	D100	D60	D30	D10	%Gravel	%Sand	%Silt	%Clay
● AA-04	(-38' to -39' NAVD)	2	0.176	0.15	0.126	0.0			



Rock Engineering & Testing Lab., Inc.
6817 Leopard St.
Corpus Christi, TX 78409
Telephone: (361) 883-4555
Fax: (361) 883-4711

GRAIN SIZE DISTRIBUTION

Project: Anchorage Basin Sand Source Investigation
Location: Anchorage Basin; Galveston, Texas
Number: G109112

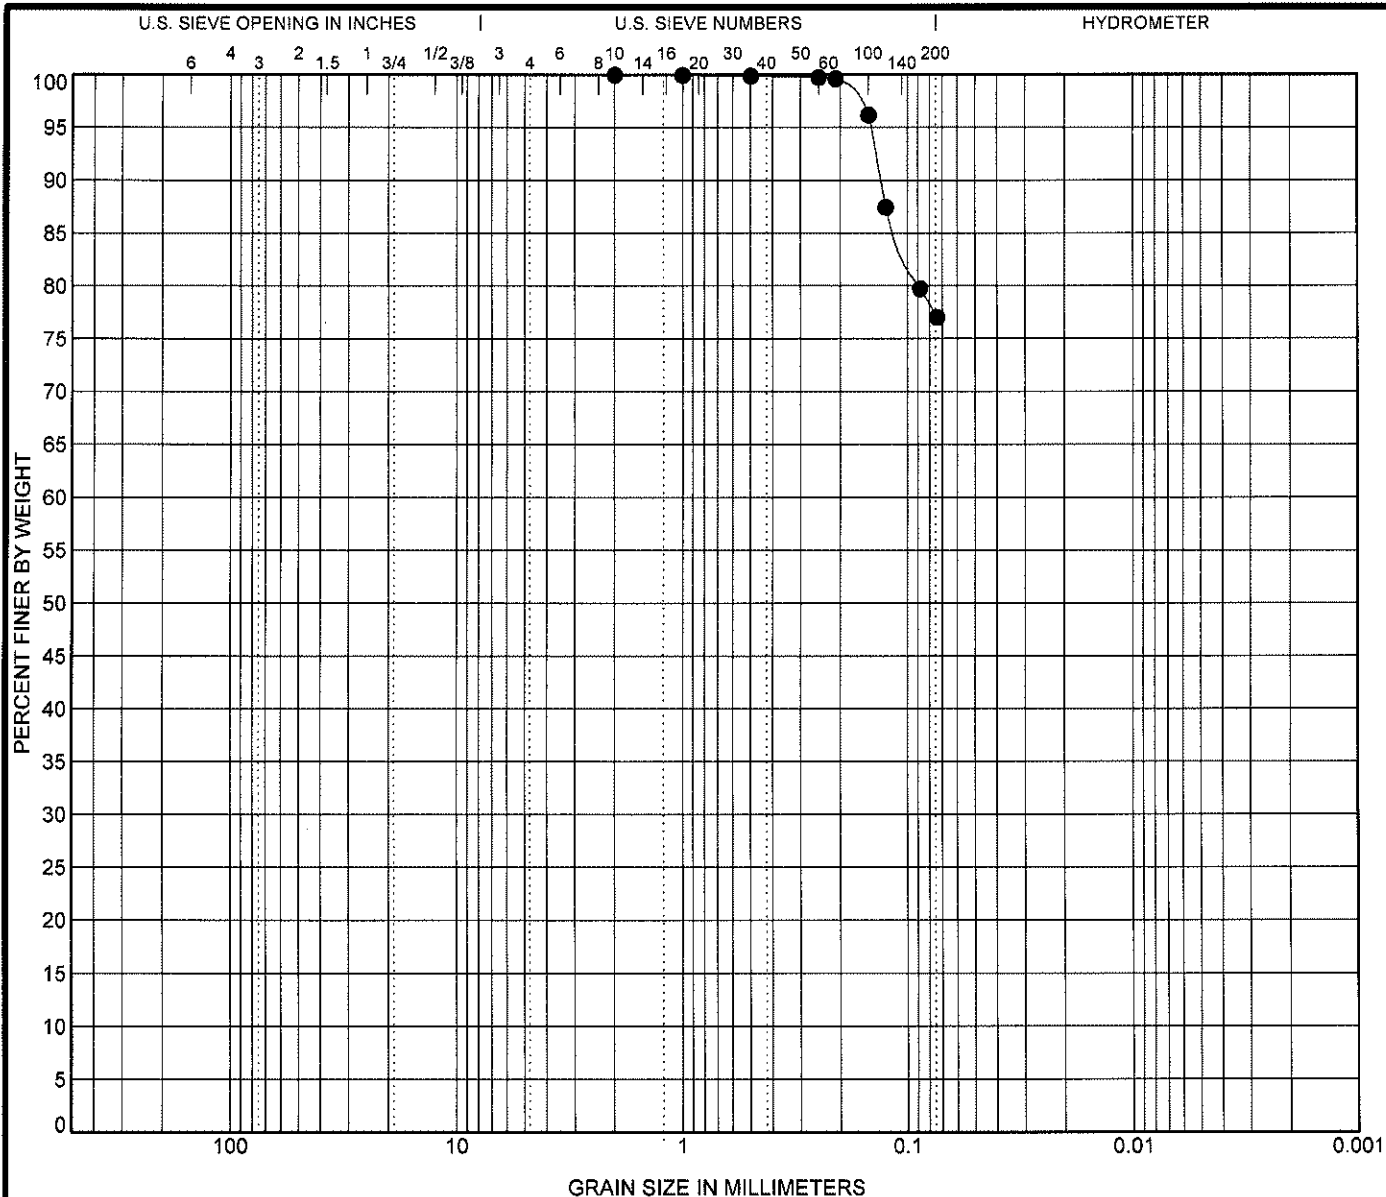

COBBLES	GRAVEL		SAND			SILT OR CLAY
	coarse	fine	coarse	medium	fine	

Specimen ID	Depth	Classification	LL	PL	PI	Cc	Cu
● AA-04	(-40' to -41' NAVD)	Borrow Area (-40' to -41' NAVD)					

Specimen ID	Depth	D100	D60	D30	D10	%Gravel	%Sand	%Silt	%Clay
● AA-04	(-40' to -41' NAVD)	2				0.0			




Rock Engineering & Testing Lab., Inc.
6817 Leopard St.
Corpus Christi, TX 78409
Telephone: (361) 883-4555
Fax: (361) 883-4711

GRAIN SIZE DISTRIBUTION

Project: Anchorage Basin Sand Source Investigation
Location: Anchorage Basin; Galveston, Texas
Number: G109112

LOG OF BORING AA-04

SHEET 2 OF 2



Rock Engineering & Testing Lab., Inc.
 6817 Leopard St.
 Corpus Christi, TX 78409
 Telephone: (361) 883-4555
 Fax: (361) 883-4711

CLIENT: HDR Engineering, Inc.
 PROJECT: Anchorage Basin Sand Source Investigation
 LOCATION: Anchorage Basin; Galveston, Texas
 NUMBER: G109112

DATE(S) DRILLED: 03/12/09 - 03/12/09

DRILLING METHOD(S):
 Vibracore

GROUNDWATER INFORMATION:

SURFACE ELEVATION: -26' NAVD

DESCRIPTION OF STRATUM

SANDY CLAY, gray.

Same as above.

Boring was extended to an elevation of -42-feet NAVD during the drilling operations.

N - STANDARD PENETRATION TEST RESISTANCE
 P - POCKET PENETROMETER RESISTANCE
 T - POCKET TORVANE SHEAR STRENGTH

REMARKS:

Boring depth and location was determined by HDR Engineering, Inc. Boring operations were performed by Ocean Surveys, Inc.
 GPS Coord. N. 13,699,436' E. 3,317,401'