Houston Ship Channel LOG OF BORING NO. 3 St-134

Tide +2.4 @ 7:15 PM

TYPE: 3" Shelby Tube LOCATION: Baytown sta 30+00

DEPTH FT.	SYMBOL	SAMPLES	DESCRIPTION OF MATERIAL (SURF EL)	BLOWS PER FT.	UNIT DRY WT. LBS/CU.FT.
10					
15					
20					
25			Water		
	CH		Gray Clay, V/Soft to Medium L.S. = 25.0 0-6-94		75.5
30	CL		Gray & Tan Sandy Clay, V/Stiff to Hard w/ tr Cal Nod		99.0
					107.1
35			L.S. = 18.0 0-30-70		107.3
					108.6
40			L.S. = 11.0 0-18-82		116.8
	ML CL		Gray & Tan Sandy Silty Clay, L.S. = 3.0 V/Stiff 0-49-51		111.2
45	CL		L.S. = 5.0 0-48-52		
			Gray & Rust Sandy Clay, V/Stiff L.S. = 7.0 W/Cal Nod 6-19-75		111.6
50	SM		Gray & Brown Silty Sand, V/Dense 80 2-76-22		
55					

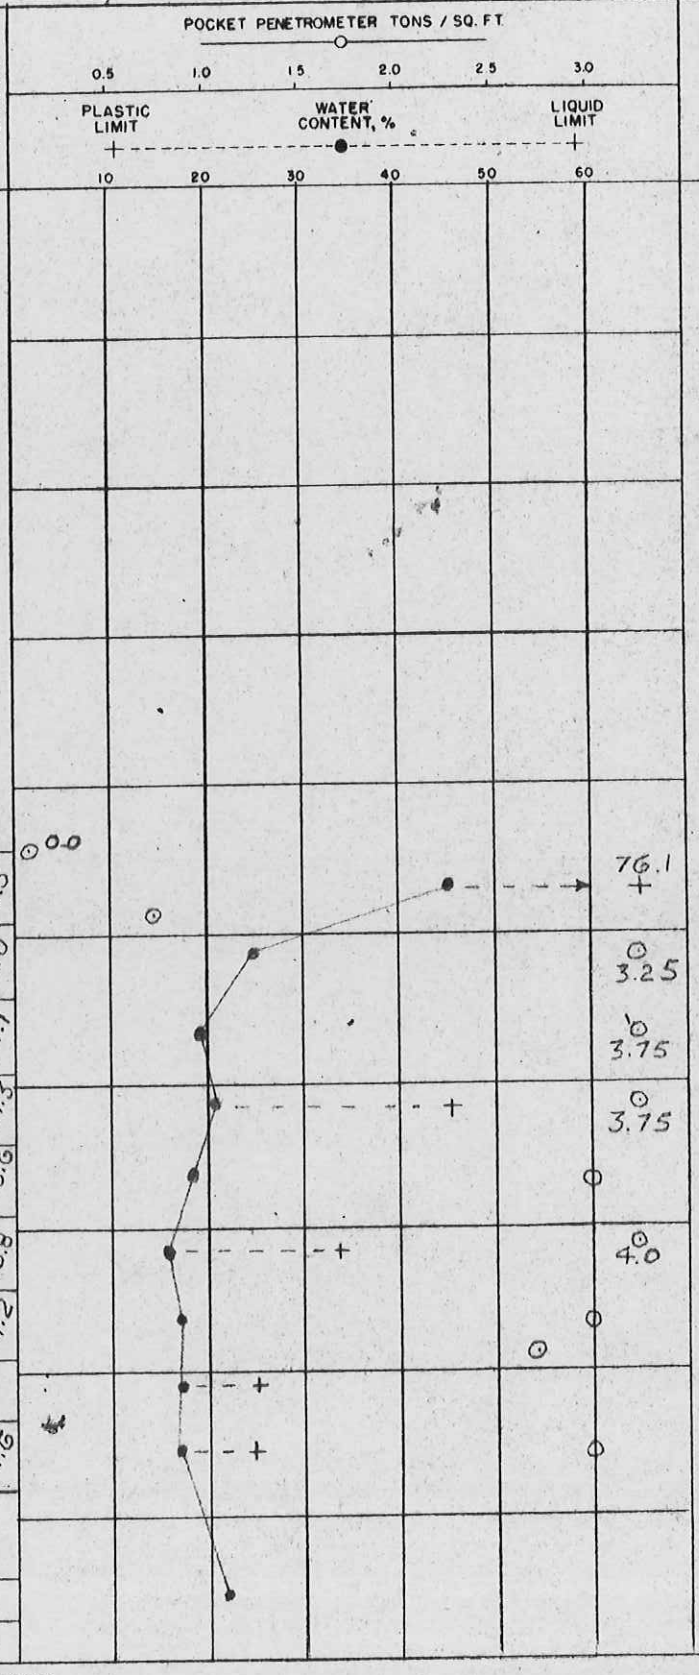

COMPLETION DEPTH 53.5'

DATE 23 May 1963

DEPTH TO WATER IN BORING

DATE

SWN 266(C)
22 AUG 62