


RESULTS OF UNCONFINED COMPRESSION TESTS (STIFF TO VSTIFF)

BORING NO.	DEPTH	UNC. STRESS (PSF)		DESCRIPTION OF SAMPLE
93-251	46-48	1760	[880]	STIFF BN clay (CL)
93-251	54-56	2780	[1390]	STIFF Gr clay (CH)
93-252	48-50	1540	[770]	BN clay (CH) STIFF
" "	52-54	2760	[1380]	BN clay (CH) STIFF
93-253	38-40	1120	[560]	BN clay (CL) w/ sand sms., STIFF
" "	52-54	2000	[1000]	BN clay (CH) w/ sand sms., STIFF
93-254	30-32	1040	[520]	BN clay (CL), STIFF
" "	34-36	1420	[710]	BN clay (CL), STIFF
" "	38-40	1880	[940]	BN clay (CL), STIFF
" "	44-46	1100	[550]	BN clay (CL), STIFF
93-255	39-41	1740	[870]	BN clay (CH), STIFF
" "	43-45	1280	[640]	BN clay (CH), STIFF

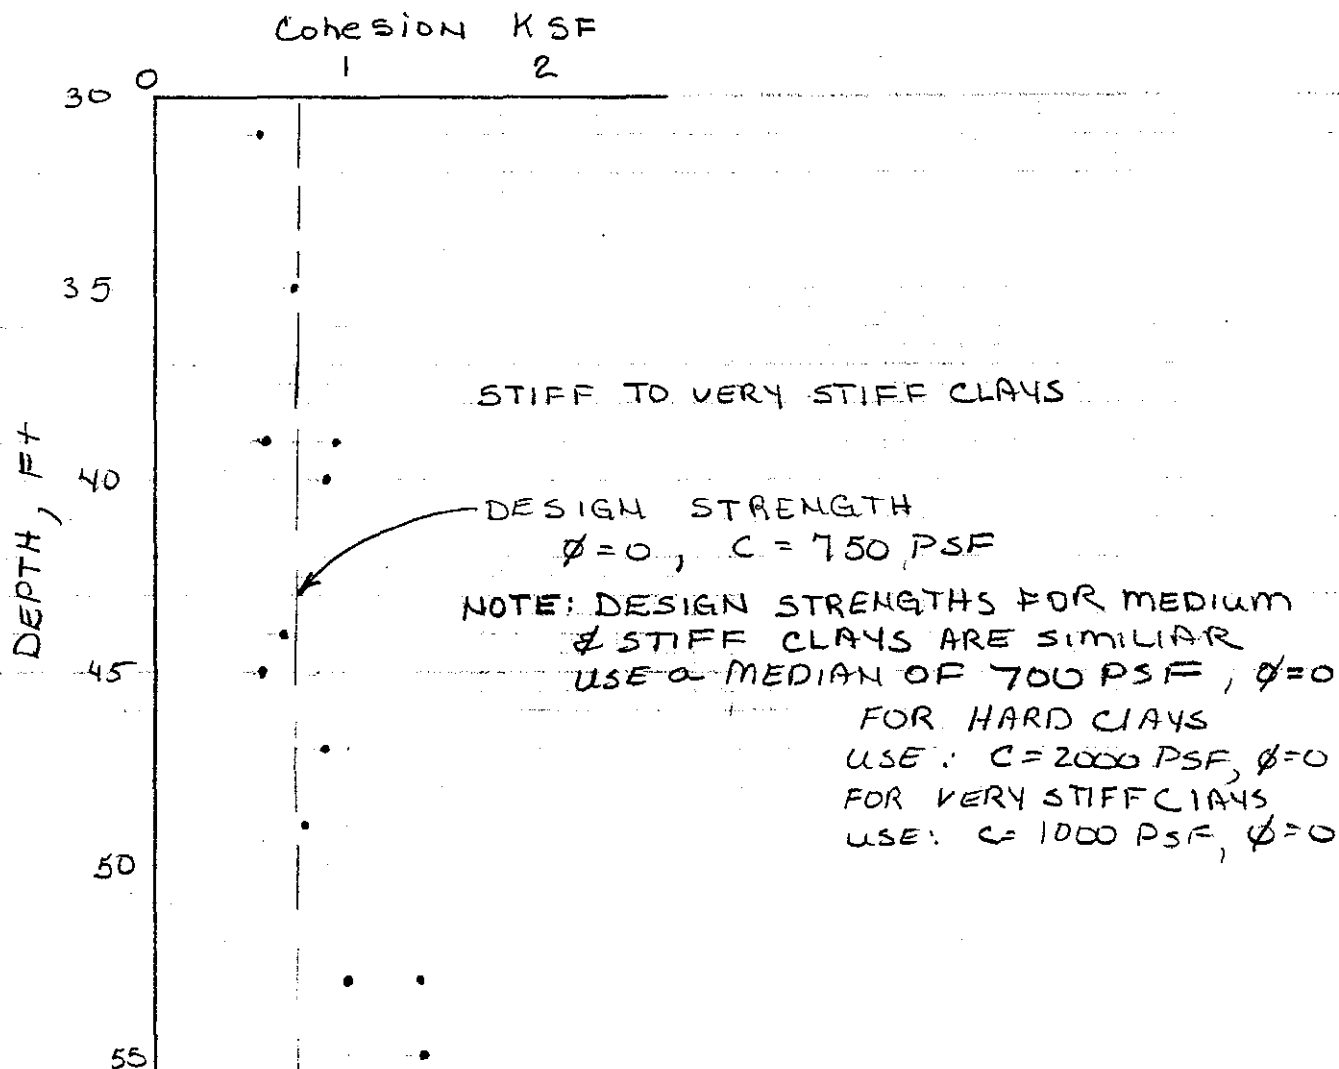

BY LG SM DATE DEC 93

CHKD. BY DATE

SUBJECT GIWK - PORT O'CONNOR
 MOORING ANCHORS

SHEET NO. OF

JOB NO.