



Aptim Environmental & Infrastructure, LLC

6401 Congress Avenue, Suite 140

Boca Raton, Florida 33487

Phone # 1-561-391-8102

Legend for Geotechnical Data

Grain Size Scale for Sediments

Unified Soil Classification System (USCS) (ASTM D2487/2488)		APTIM Standard Sieve Stack		
		Sieve Number	Size (phi)	Size (mm)
Gravel	Coarse Gravel	3/4	-4.25	19.03
	Fine Gravel	5/8	-4.00	16.00
		7/16	-3.50	11.20
		5/16	-3.00	8.00
		3 1/2	-2.50	5.60
		4	-2.25	4.75
Sand	Coarse Sand	5	-2.00	4.00
		7	-1.50	2.80
		10	-1.00	2.00
	Medium Sand	14	-0.50	1.40
		18	0.00	1.00
		25	0.50	0.71
		35	1.00	0.50
	Fine Sand	45	1.50	0.36
		60	2.00	0.25
		80	2.50	0.18
		120	3.00	0.13
		170	3.50	0.09
		200	3.75	0.08
Fines	Silt/Clay	230	4.00	0.06

Proportional Definition of Descriptive Terms

<u>Descriptive Term</u>	<u>Range of Proportions</u>
Sandy, gravelly, etc.	35 % to 50 %
Some	20 % to 35 %
Little	10 % to 20 %
Trace	1 % to 10 %

Consistency of Cohesive Soils

Description	Consistency Index	Approximate Undrained Shear Strength (kPa)	Field Identification
Hard		Over 300	Indented with difficulty by thumbnail, brittle.
Very Stiff	>1	150-300	Readily indented by thumbnail, still very tough.
Stiff	0.75-1	75-150	Readily indented by thumb but penetrated only with difficulty. Cannot be moulded in the fingers.
Firm	0.5-0.75	40-75	Can be penetrated several centimeters by thumb with moderate effort and moulded in fingers by strong pressure.
Soft	<0.5	20-40	Easily penetrated several centimeters by thumb, easily moulded.
Very Soft		Less than 20	Easily penetrated several centimeters by fist, exudes between fingers when squeezed in fist.

Source: *Engineering Properties of Soils and Rocks, Fourth Edition by Fred G. Bell*

USCS Classifications

Refers to the Army Corps of Engineers Unified Soils Classification System. Class types are defined primarily by grain size, sorting and percent of material passing the #200 sieve. Classification of materials on the core logs based on visual field examinations are identified on the core logs under the Classification of Materials Description. Classifications based on laboratory sieve analyses are identified on the core logs in the Legend and under Remarks.


GW		Well graded gravels or gravel-sand mixtures, little or no fines	ML		Inorganic silts and very fine sands, rock flour, sandy silts or clayey silts with slight plasticity
GP		Poorly graded gravels or gravel-sand mixtures, w/ little or no fines	MH		Inorganic silts, micaceous or diatomaceous fine sandy or silty soil, elastic silts
GM		Silty gravels, gravel-sand-silt mixtures	OL		Organic silts and organic silt-clays of low plasticity
GC		Clayey gravels, gravel-sand-clay mixtures	OH		Organic clays of medium to high plasticity, organic silts
SW		Well graded sands or gravelly sands, little or no fines	CL		Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays
SP		Poorly graded sands or gravelly sands, little or no fines	CH		Inorganic clays of high plasticity, fat clays
SM		Silty sands, sand-silt mixtures	PT		Peat and other highly organic soils
SC		Clayey sands, sand-clay mixtures	SP-SM		Poorly-graded silty sand
SW-SM		Well-graded silty sand	SM-SC		Silty clayey sand
GW-GM		Well-graded silty gravel	ML-CL		Inorganic silty lean clay
GM-GC		Clayey silty gravel			

Note: Information is after ACOE Atlantic Division Manual # 1110-1-1 titled *Engineering and Design Geotechnical Manual for Surface and Subsurface Investigations*

DRILLING LOG		DIVISION	INSTALLATION	SHEET 1 OF 1 SHEETS
1. PROJECT TX GLO Region 1 Recon Geotechnical Sand Search Jefferson, Chambers, Galveston and Brazoria Co.			9. SIZE AND TYPE OF BIT 3.0 In.	
2. BORING DESIGNATION TXGLO1-VC-23-027			10. COORDINATE SYSTEM/DATUM Texas State Plane South	
3. DRILLING AGENCY APTIM			11. MANUFACTURER'S DESIGNATION OF DRILL APTIM SEAS VC-700 Vibracore	
4. NAME OF DRILLER APTIM			<input type="checkbox"/> AUTO HAMMER <input type="checkbox"/> MANUAL HAMMER	
5. DIRECTION OF BORING <input checked="" type="checkbox"/> VERTICAL <input type="checkbox"/> INCLINED			12. TOTAL SAMPLES 0	
6. THICKNESS OF OVERBURDEN 0.0 Ft.			13. TOTAL NUMBER CORE BOXES	
7. DEPTH DRILLED INTO ROCK 0.0 Ft.			14. ELEVATION GROUND WATER	
8. TOTAL DEPTH OF BORING 19.4 Ft.			15. DATE BORING 10-08-23	
			16. ELEVATION TOP OF BORING -25.9 Ft.	
			17. TOTAL RECOVERY FOR BORING 19.5 Ft.	
			18. SIGNATURE AND TITLE OF INSPECTOR SM	

ELEV. (ft)	DEPTH (ft)	LEGEND	CLASSIFICATION OF MATERIALS Depths and elevations based on measured values	% REC.	BOX OR SAMPLE	REMARKS The USCS classification system defines silt as the percent passing the No.200 (0.075 mm) sieve
-25.9	0.0					
-27.7	1.8		Clayey SILT, clay component is very stiff, clay increases with depth in layer, color is mottled grayish brown (2.5Y-5/2) and olive (5Y-5/3), (ML).		T1	Sample #T1, Depth = 0.7' Ave. Field Vane (tsf): 0.31
-30.3	4.4		Silty FAT CLAY, very stiff, oxidation throughout layer, partially lithified clay between 2.3' & 2.9', olive (5Y-5/3), (CH).		T2	Sample #T2, Depth = 2.4' Ave. Field Vane (tsf): 0.20
-31.7	5.8		FAT CLAY, very stiff, trace silt, olive gray (5Y-5/2), (CH).		T3	Sample #T3, Depth = 5.2' Ave. Field Vane (tsf): 0.26
-33.0	7.1		FAT CLAY, hard, trace organics, trace silt, trace wood fragments, (0.5" x 1.25") wood fragment @ 6.0', 2.0" organic pocket @ 6.1', greenish gray (10Y-5/1), (CH).		T4	Sample #T4, Depth = 6.5' Ave. Field Vane (tsf): 0.38
-37.0	11.1		Silty SAND, fine grained, quartz, little shell hash, trace clay, trace shell fragments, clay distributed in pockets typically up to 0.5", 2.0" pocket of bivalve fragments up to 1.5" @ 7.1', 1.0" clay pocket @ 9.0', gray (5Y-5/1), (SM).			
-39.3	13.4		Sandy SILT, little shell hash, trace whole shell, sand component is fine grained quartz, whole bivalves typically up to 2.0" between 12.2' & 13.4', (1.25" x 1.5") whole articulated bivalve @ 12.6', gray (2.5Y-5/1), (ML).			
-40.5	14.6		Silty FAT CLAY, firm, little wood fragments, trace sand, fine grained, quartz, trace shell hash, trace whole shell, sand decreases with depth in layer, wood fragments are tree root fragments between 13.5' & 14.1', (0.75" x 1.0") whole bivalve @ 13.5', dark gray (2.5Y-4/1), (CH).		T5	Sample #T5, Depth = 14.9' Ave. Field Vane (tsf): 0.38
-41.5	15.6		FAT CLAY, hard, trace shell hash, trace silt, silt distributed in laminae, shell hash distributed in pockets up to 1.5", greenish gray (10GY-5/1), (CH).			
-45.4	19.5		Silty FAT CLAY, hard, trace shell hash, trace wood fragments, silt increases with depth in layer, (0.5" x 0.75") wood fragment @ 15.9', 0.5" partially lithified clay pocket @ 16.3', possible bioturbation between 17.6' & 17.8' and between 18.2' & 18.8', expansion from 19.4' to 19.5', Bit sample from 19.1' to 19.5', gray (5Y-5/1), (CH).		T6	Sample #T6, Depth = 16.5' Ave. Field Vane (tsf): 0.46
			End of Boring			

REGION 1 RECON GEOTECH GP.1 3/25/24

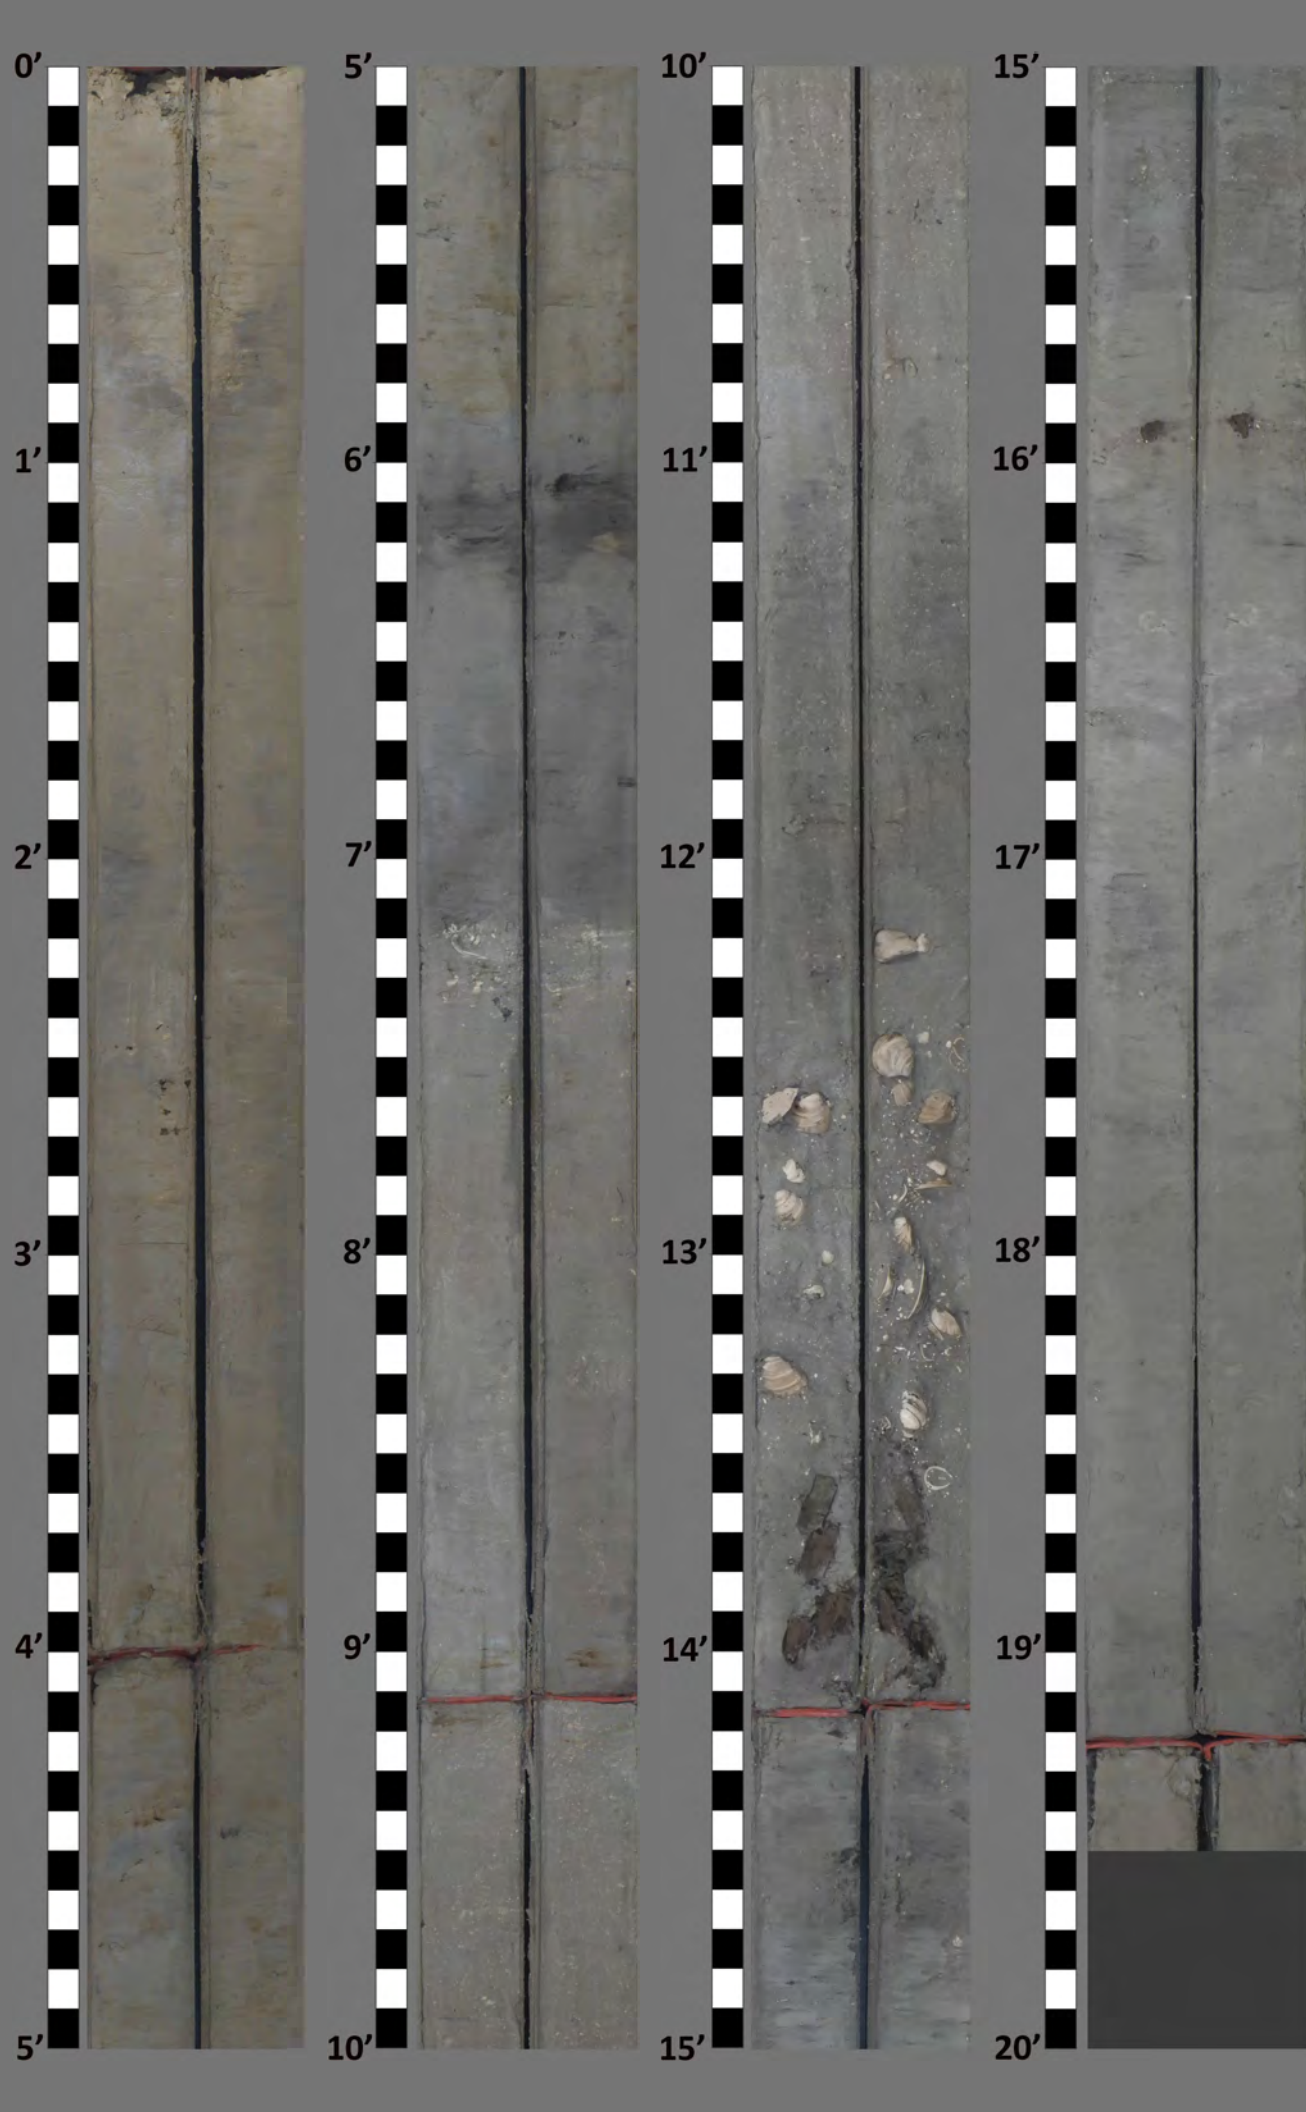

Texas General
Land Office

Texas GLO
Region 1
Geotechnical
Reconnaissance
Survey

TXGLO1-VC-23-027

Date Collected: 10/8/23
Top Elev. (ft NAVD88): -25.9
Bottom Elev. (ft NAVD88): -45.4
Core Length (ft): 19.5



6401 Congress Avenue, Suite 140
Boca Raton, FL 33487
www.aptim.com
(561)391-8102



Mini Vane Shear Test Results

CORE ID	SAMPLE DEPTH (ft)	TORVANE (kg/cm ²)	TORVANE (tsf)	TORVANE (kpa)	DESCRIPTION ¹
TXGLO1-VC-23-017	2.3	2.5	0.26	245.17	Very Stiff
	4.3	3.5	0.36	343.23	Hard
	7.0	3.0	0.31	294.20	Very Stiff
	10.2	1.5	0.15	147.10	Stiff
TXGLO1-VC-23-018	2.1	5.5	0.56	539.37	Hard
	3.3	5.0	0.51	490.33	Hard
	4.5	6.0	0.61	588.40	Hard
	8.3	9.0	0.92	882.60	Hard
	12.9	7.5	0.77	735.50	Hard
TXGLO1-VC-23-019	3.0	2.0	0.20	196.13	Very Stiff
	6.2	3.0	0.31	294.20	Very Stiff
	13.2	5.5	0.56	539.37	Hard
TXGLO1-VC-23-020	2.8	0.5	0.05	49.03	Firm
TXGLO1-VC-23-021	2.8	2.5	0.26	245.17	Very Stiff
	13.0	3.0	0.31	294.20	Very Stiff
	16.8	2.5	0.26	245.17	Very Stiff
TXGLO1-VC-23-022	2.8	2.5	0.26	245.17	Very Stiff
	9.5	1.0	0.10	98.07	Stiff
TXGLO1-VC-23-023	2.0	7.0	0.72	686.47	Hard
	4.5	7.5	0.77	735.50	Hard
	6.1	5.5	0.56	539.37	Hard
	7.6	7.5	0.77	735.50	Hard
	10.3	8.0	0.82	784.53	Hard
	12.4	8.5	0.87	833.57	Hard
TXGLO1-VC-23-024	6.1	4.0	0.41	392.27	Hard
	9.7	3.5	0.36	343.23	Hard
	15.6	6.5	0.67	637.43	Hard
TXGLO1-VC-23-025	0.6	0.5	0.05	49.03	Firm
	14.5	1.5	0.15	147.10	Stiff
	17.9	3.0	0.31	294.20	Very Stiff
TXGLO1-VC-23-026	0.8	1.5	0.15	147.10	Stiff
	17.9	2.5	0.26	245.17	Very Stiff
TXGLO1-VC-23-027	0.7	3.0	0.31	294.20	Very Stiff
	2.4	2.0	0.20	196.13	Very Stiff
	5.2	2.5	0.26	245.17	Very Stiff
	6.5	3.8	0.38	367.75	Hard
	14.9	3.8	0.38	367.75	Hard
	16.5	4.5	0.46	441.30	Hard
TXGLO1-VC-23-028	No Torvane Conducted				