BRAZOS ISLAND HARBOR

LOG OF BORING NO. 3ST-8

TYPE: 3" shelby Tube LOCATION: Sta 85+200 250' south of ℄

SURF EL:

DEPTH FT.	SYMBOL	SAMPLES	DESCRIPTION OF MATERIAL	BLOWS PER FT.	UNIT DRY WT. LBS./CU.FT.	ELEVATION FT.
	CL		Gray clay, hard Trace of organic material LS=12.0 0-12-88		104 96 85	4.5 4.5
5	SM		Gray silty sand LS=0.0 0-78-22		100 105	
10	SC		Gray clayey sand v/stiff LS=9.0 0-64-31		109	
	CL		Gray clay v/stiff - hard Sandy - 15.0-17.5' LS=11.0 4-40-56 Calcareous nodules from 15.0 - 20.0' LS=15.0 0-12-88 LS=11.0 0-9-96		112 113 107 106 107 102	3.75 4.0 4.25 4.25 4.5
30	ML		Brown sandy silt Dense LS=0.0 0-29-71	24		
35	SM		Brown silty sand v/Dense LS=0.0 0-56-99	52 60		
45	CH		Brown clay, hard LS=18.0 0-0-100	46		
	CL ML		Brown clayey silt stiff LS=3.0 0-4-96		97	

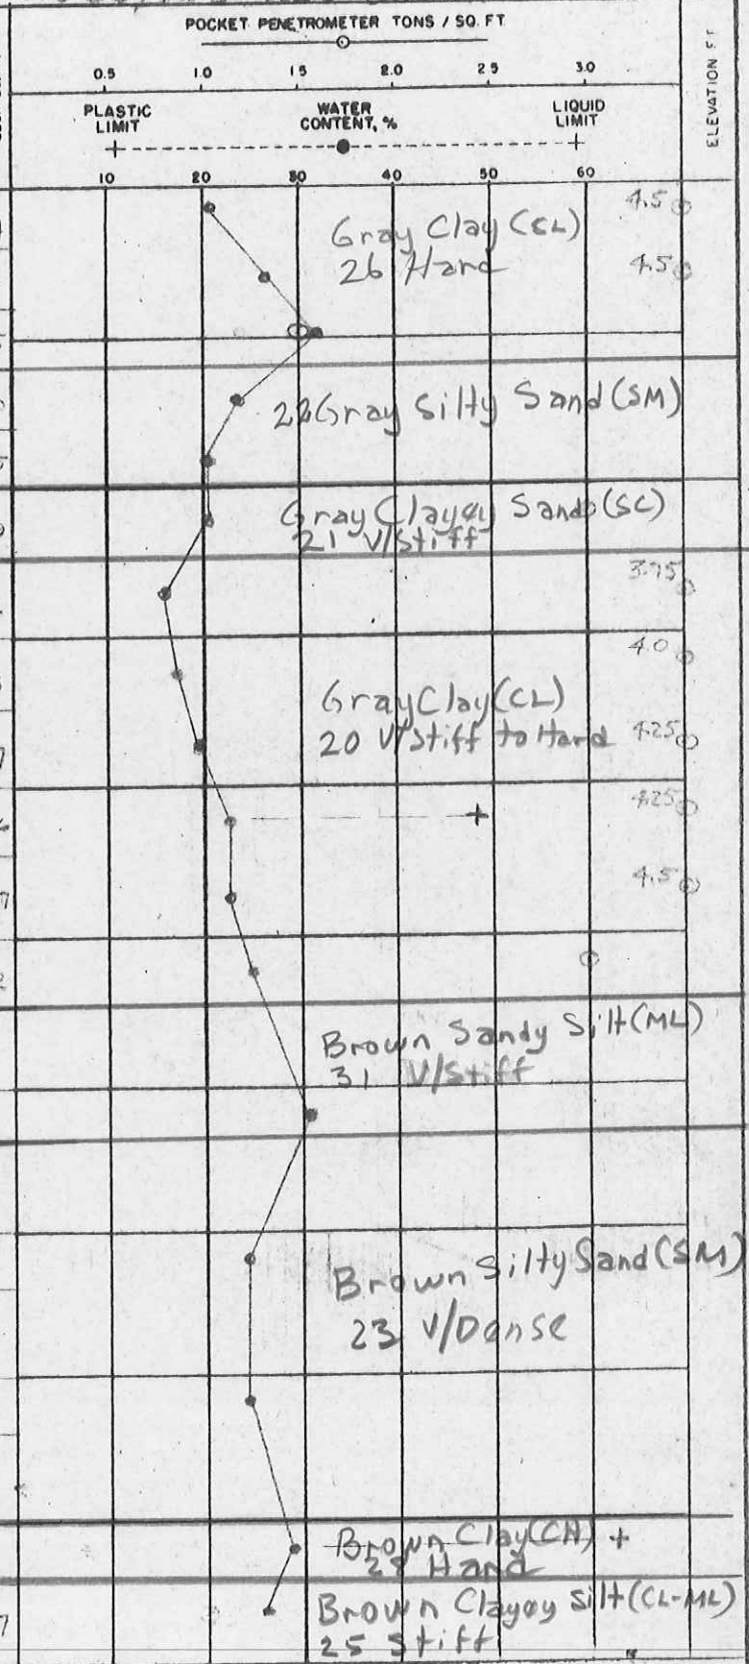

COMPLETION DEPTH 55.0'
DATE 24 JAN '64

DEPTH TO WATER IN BORING

DATE

SWN 266(C)
22 AUG 62

BRAZOS ISLAND HARBOR

LOG OF BORING NO. 35T-8

TYPE: 3" Shelby Tube

LOCATION:

DEPTH FT.	SYMBOL	SAMPLES	DESCRIPTION OF MATERIAL (SURF EL:)	BLOWS PER FT.	UNIT DRY WT. LBS./CU.FT.	POCKET PENETROMETER TONS / SQ. FT. (0.5, 1.0, 1.5, 2.0, 2.5, 3.0) / PLASTIC LIMIT — WATER CONTENT, % — LIQUID LIMIT (10, 20, 30, 40, 50, 60)	ELEVATION FT.
	CL		Stiff		95		
	ML				101		
5							
10							
15							
20							
25							
30							
35							
40							
45							
50							

COMPLETION DEPTH

DATE

DEPTH TO WATER IN BORING

DATE

SWN 266(C)
22 AUG 62