



Aptim Environmental & Infrastructure, LLC

6401 Congress Avenue, Suite 140

Boca Raton, Florida 33487

Phone # 1-561-391-8102

Legend for Geotechnical Data

Grain Size Scale for Sediments

Unified Soil Classification System (USCS) (ASTM D2487/2488)		APTIM Standard Sieve Stack		
		Sieve Number	Size (phi)	Size (mm)
Gravel	Coarse Gravel	3/4	-4.25	19.03
	Fine Gravel	5/8	-4.00	16.00
		7/16	-3.50	11.20
		5/16	-3.00	8.00
		3 1/2	-2.50	5.60
		4	-2.25	4.75
Sand	Coarse Sand	5	-2.00	4.00
		7	-1.50	2.80
		10	-1.00	2.00
	Medium Sand	14	-0.50	1.40
		18	0.00	1.00
		25	0.50	0.71
		35	1.00	0.50
	Fine Sand	45	1.50	0.36
		60	2.00	0.25
		80	2.50	0.18
		120	3.00	0.13
		170	3.50	0.09
		200	3.75	0.08
Fines	Silt/Clay	230	4.00	0.06

Proportional Definition of Descriptive Terms

<u>Descriptive Term</u>	<u>Range of Proportions</u>
Sandy, gravelly, etc.	35 % to 50 %
Some	20 % to 35 %
Little	10 % to 20 %
Trace	1 % to 10 %

Consistency of Cohesive Soils

Description	Consistency Index	Approximate Undrained Shear Strength (kPa)	Field Identification
Hard		Over 300	Indented with difficulty by thumbnail, brittle.
Very Stiff	>1	150-300	Readily indented by thumbnail, still very tough.
Stiff	0.75-1	75-150	Readily indented by thumb but penetrated only with difficulty. Cannot be moulded in the fingers.
Firm	0.5-0.75	40-75	Can be penetrated several centimeters by thumb with moderate effort and moulded in fingers by strong pressure.
Soft	< 0.5	20-40	Easily penetrated several centimeters by thumb, easily moulded.
Very Soft		Less than 20	Easily penetrated several centimeters by fist, exudes between fingers when squeezed in fist.

Source: *Engineering Properties of Soils and Rocks, Fourth Edition by Fred G. Bell*

USCS Classifications


Refers to the Army Corps of Engineers Unified Soils Classification System. Class types are defined primarily by grain size, sorting and percent of material passing the #200 sieve. Classification of materials on the core logs based on visual field examinations are identified on the core logs under the Classification of Materials Description. Classifications based on laboratory sieve analyses are identified on the core logs in the Legend and under Remarks.

GW		Well graded gravels or gravel-sand mixtures, little or no fines	ML		Inorganic silts and very fine sands, rock flour, sandy silts or clayey silts with slight plasticity
GP		Poorly graded gravels or gravel-sand mixtures, w/ little or no fines	MH		Inorganic silts, micaceous or diatomaceous fine sandy or silty soil, elastic silts
GM		Silty gravels, gravel-sand-silt mixtures	OL		Organic silts and organic silt-clays of low plasticity
GC		Clayey gravels, gravel-sand-clay mixtures	OH		Organic clays of medium to high plasticity, organic silts
SW		Well graded sands or gravelly sands, little or no fines	CL		Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays
SP		Poorly graded sands or gravelly sands, little or no fines	CH		Inorganic clays of high plasticity, fat clays
SM		Silty sands, sand-silt mixtures	PT		Peat and other highly organic soils
SC		Clayey sands, sand-clay mixtures	SP-SM		Poorly-graded silty sand
SW-SM		Well-graded silty sand	SM-SC		Silty clayey sand
GW-GM		Well-graded silty gravel	ML-CL		Inorganic silty lean clay
GM-GC		Clayey silty gravel			

Note: Information is after ACOE Atlantic Division Manual # 1110-1-1 titled *Engineering and Design Geotechnical Manual for Surface and Subsurface Investigations*

DRILLING LOG		DIVISION		INSTALLATION		SHEET 1 OF 1 SHEETS	
1. PROJECT TX GLO Region 1 Recon Geotechnical Sand Search Jefferson, Chambers, Galveston and Brazoria Co. 				9. SIZE AND TYPE OF BIT 3.0 In.			
2. BORING DESIGNATION TXGLO1-VC-23-011				10. COORDINATE SYSTEM/DATUM Texas State Plane South		HORIZONTAL NAD 1983	
3. DRILLING AGENCY APTIM				11. MANUFACTURER'S DESIGNATION OF DRILL APTIM SEAS VC-700 Vibracore		VERTICAL NAVD88	
4. NAME OF DRILLER APTIM				12. TOTAL SAMPLES			
5. DIRECTION OF BORING ☒ VERTICAL ☐ INCLINED				13. TOTAL NUMBER CORE BOXES		☐ AUTO HAMMER ☐ MANUAL HAMMER	
6. THICKNESS OF OVERBURDEN 0.0 Ft.				14. ELEVATION GROUND WATER		15. DATE BORING	
7. DEPTH DRILLED INTO ROCK 0.0 Ft.				16. ELEVATION TOP OF BORING -25.0 Ft.		17. TOTAL RECOVERY FOR BORING 17.5 Ft.	
8. TOTAL DEPTH OF BORING 17.4 Ft.				18. SIGNATURE AND TITLE OF INSPECTOR SM			
ELEV. (ft)	DEPTH (ft)	LEGEND	CLASSIFICATION OF MATERIALS Depths and elevations based on measured values	% REC.	BOX OR SAMPLE	REMARKS The USCS classification system defines silt as the percent passing the No.200 (0.075 mm) sieve	
-25.0	0.0						
-28.1	3.1		LEAN CLAY, very soft, trace shell hash, trace silt, shell hash and silt distributed in laminae, dark gray (2.5Y-4/1), (CL).				
-30.5	5.5		FAT CLAY, hard, little sand, fine grained, quartz, trace rock fragments, trace silt, sand increases with depth in layer, rock fragments are fragments of partially lithified clay up to 0.19" between 3.1' & 3.7', partially lithified clay in pockets up to 1.0" between 3.1' & 4.1', 0.75" sand pocket @ 5.0', 1.5" sand pocket @ 5.2', color is mottled greenish gray (10GY-6/1) and light yellowish brown (2.5Y-6/3), (CH).		T1	Sample #T1, Depth = 4.4' Ave. Field Vane (tsf): 0.56	
-32.1	7.1		Silty SAND, fine grained, quartz, little clay, clay distributed throughout layer and in pockets up to 0.75", silt distributed throughout layer and in laminae between 6.6' & 7.1', light olive brown (2.5Y-5/4), (ML).		1	Sample #1, Depth = 6.3' Mean (mm): 0.09, Phi Sorting: 0.28 Fines (230): 46.32% Fines (200): 57.07% (ML)	
-33.4	8.4		Sandy LEAN CLAY, firm, trace rock fragments, trace silt, sand component is fine grained quartz, rock fragments are fragments of partially lithified clay up to 0.19", oxidation throughout layer, 1.5" pocket of rock fragments @ 7.2', light brownish gray (2.5Y-6/2), (CL).				
-40.1	15.1		FAT CLAY, stiff, some sand, fine grained, quartz, oxidation throughout layer, sand interbedded throughout layer, sand decreases with depth in layer, possible bioturbation between 11.3' & 11.5' and between 13.5' & 13.8', lenticular bedding between 14.8' & 15.1', color is mottled grayish brown (2.5Y-5/2) and greenish gray (10Y-5/1), (CH).				
-41.6	16.6		FAT CLAY, hard, trace silt, silt increases with depth in layer, oxidation throughout layer, color is mottled brown (10YR-4/3) and greenish gray (10Y-5/1), (CH).		T2	Sample #T2, Depth = 16.0' Ave. Field Vane (tsf): 0.67	
-42.5	17.5		SAND, very fine grained, quartz, trace clay, trace silt, clay distributed in pockets up to 0.25", expansion from 17.4' to 17.5', Bit sample from 17.1' to 17.5', light yellowish brown (2.5Y-6/3), (SP).				
			End of Boring				

REGION 1 RECON GEOTECH GPJ 3/25/24

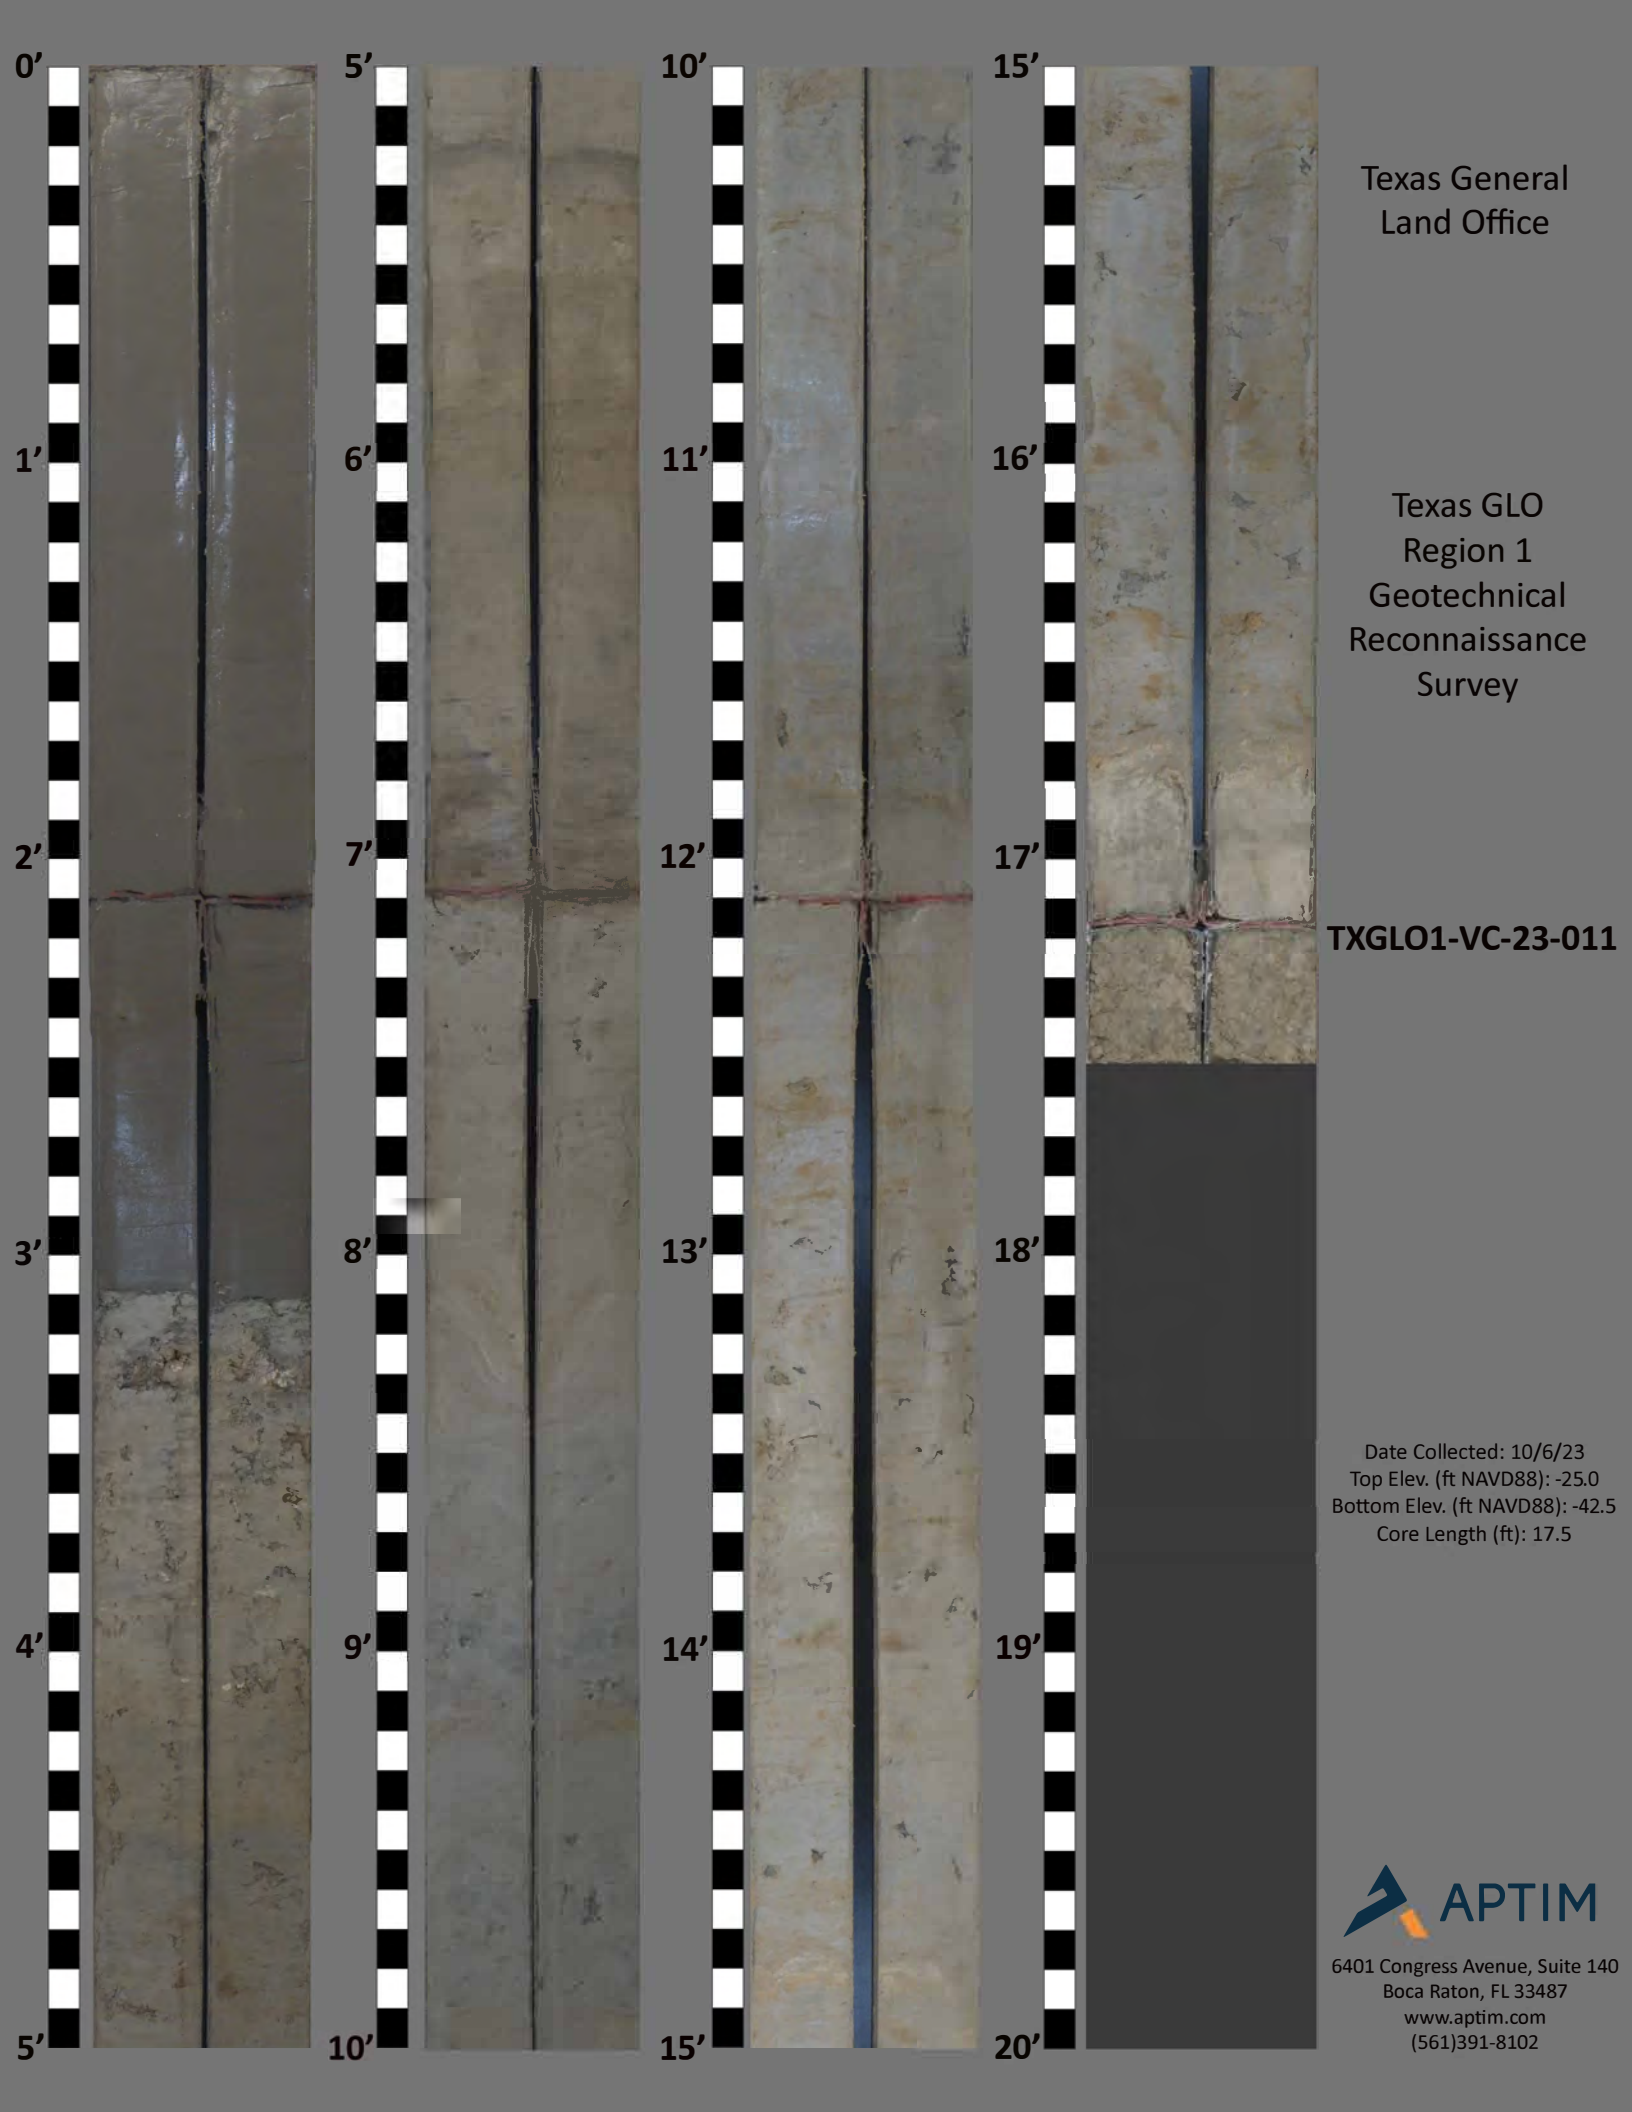

Texas General
Land Office


Texas GLO
Region 1
Geotechnical
Reconnaissance
Survey

TXGLO1-VC-23-011

Date Collected: 10/6/23
Top Elev. (ft NAVD88): -25.0
Bottom Elev. (ft NAVD88): -42.5
Core Length (ft): 17.5

Granularmetric Report				 APTIM 6401 Congress Avenue, Suite 140 Boca Raton, FL 33487 ph (561) 391-8102			
Depths and elevations based on measured values							
Project Name: TX GLO Region 1 Recon Geotechnical Sand Search							
Sample Name: TXGLO1-VC-23-011 #1							
Analysis Date: 01-18-24							
Analyzed By: SM							
Easting (ft):		Northing (ft):		Coordinate System:		Elevation (ft):	
3,531,824		13,802,780		Texas State Plane South		-31.3 NAVD88	
USCS:		Munsell:		Comments:			
ML		Wet - 2.5Y-5/4 Dry - 2.5Y-7/4 Washed - 10YR-8/1					
Dry Weight (g):	Wash Weight (g):	Pan Retained (g):	Sieve Loss (%):	Fines (%):	Organics (%):	Carbonates (%):	Shell Hash (%):
96.40	60.27	8.48	0.04	#200 - 57.07 #230 - 46.32			
Sieve Number	Sieve Size (Phi)	Sieve Size (Millimeters)	Grams Retained	% Weight Retained	Cum. Grams Retained	C. % Weight Retained	
3/4"	-4.25	19.03	0.00	0.00	0.00	0.00	
5/8"	-4.00	16.00	0.00	0.00	0.00	0.00	
7/16"	-3.50	11.31	0.00	0.00	0.00	0.00	
5/16"	-3.00	8.00	0.00	0.00	0.00	0.00	
3.5	-2.50	5.66	0.00	0.00	0.00	0.00	
4	-2.25	4.76	0.00	0.00	0.00	0.00	
5	-2.00	4.00	0.00	0.00	0.00	0.00	
7	-1.50	2.83	0.00	0.00	0.00	0.00	
10	-1.00	2.00	0.00	0.00	0.00	0.00	
14	-0.50	1.41	0.00	0.00	0.00	0.00	
18	0.00	1.00	0.01	0.01	0.01	0.01	
25	0.50	0.71	0.01	0.01	0.02	0.02	
35	1.00	0.50	0.00	0.00	0.02	0.02	
45	1.50	0.35	0.02	0.02	0.04	0.04	
60	2.00	0.25	0.03	0.03	0.07	0.07	
80	2.50	0.18	0.04	0.04	0.11	0.11	
120	3.00	0.13	0.50	0.52	0.61	0.63	
170	3.50	0.09	28.19	29.24	28.80	29.87	
200	3.75	0.07	12.59	13.06	41.39	42.93	
230	4.00	0.06	10.36	10.75	51.75	53.68	
Phi 5	Phi 16	Phi 25	Phi 50	Phi 75	Phi 84	Phi 95	
			3.91	3.42	3.26	3.07	
Moment	Mean Phi	Mean mm	Sorting	Skewness	Kurtosis		
Statistics	3.46	0.09	0.28	-0.77	13.09		

REGION1_RECON_GEOTECH.GPJ 3/6/24

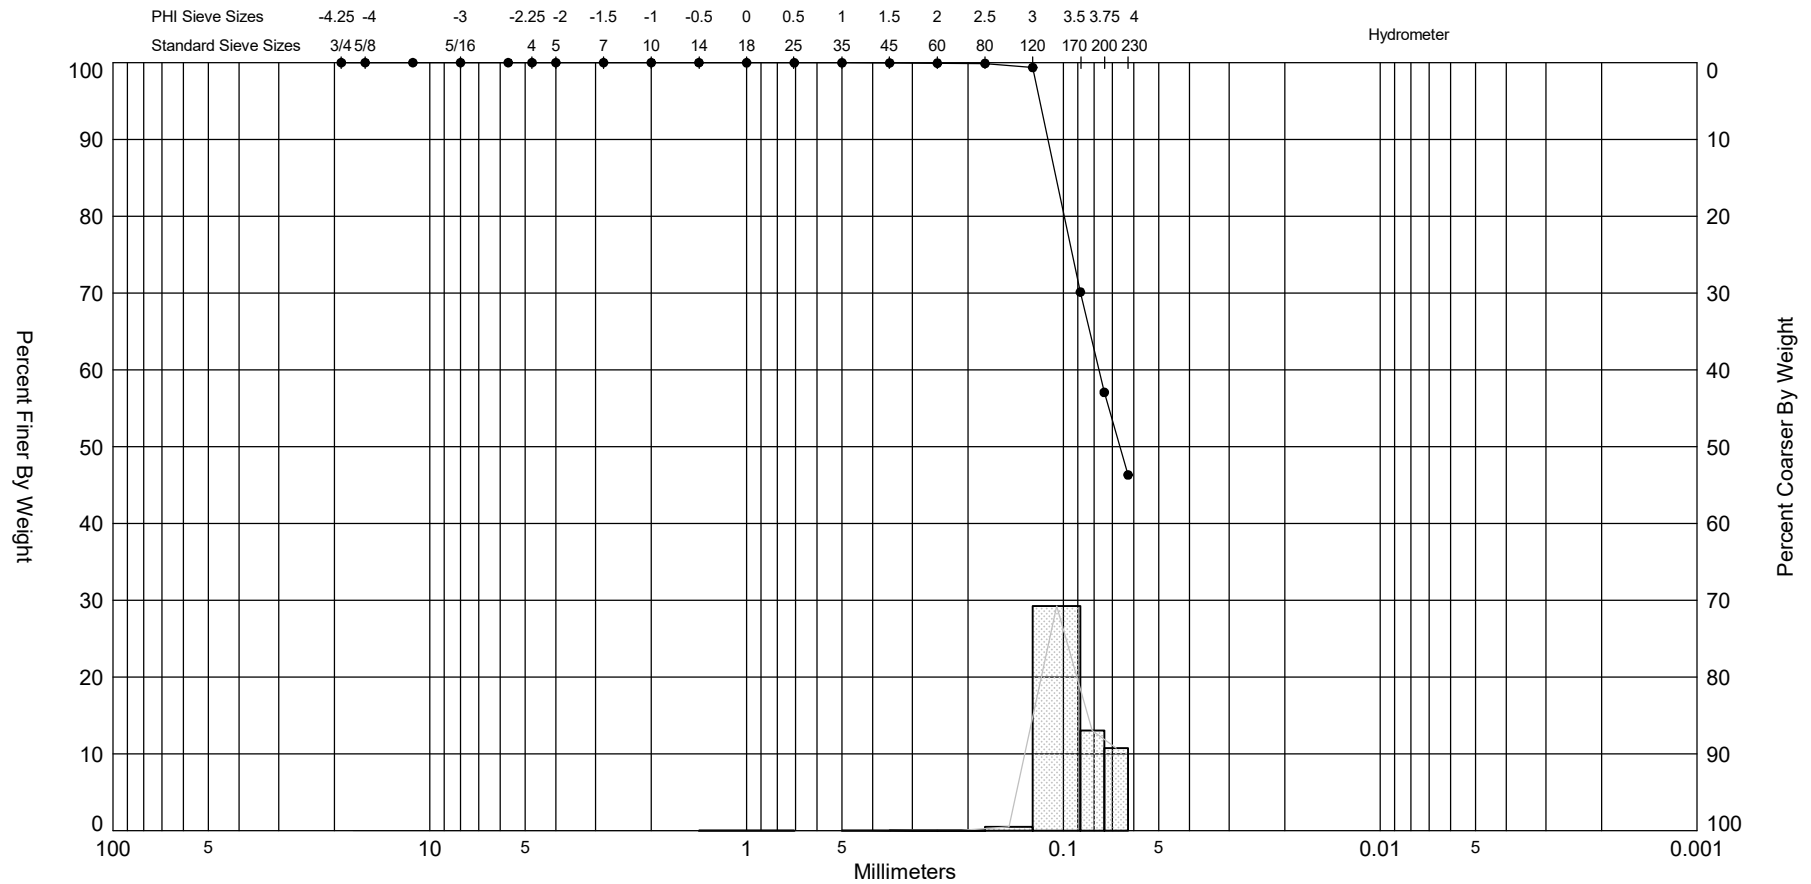



Mini Vane Shear Test Results

CORE ID	SAMPLE DEPTH (ft)	TORVANE (kg/cm ²)	TORVANE (tsf)	TORVANE (kpa)	DESCRIPTION ¹
TXGLO1-VC-23-001	No Torvane Conducted				
TXGLO1-VC-23-002	3.0	1.5	0.15	147.10	Stiff
	6.0	1.0	0.10	98.07	Stiff
TXGLO1-VC-23-003	10.3	4.5	0.46	441.30	Hard
	13.4	5.5	0.56	539.37	Hard
	16.3	2.5	0.26	245.17	Very Stiff
TXGLO1-VC-23-004	9.1	3.0	0.31	294.20	Very Stiff
	11.9	5.0	0.51	490.33	Hard
	14.1	6.0	0.61	588.40	Hard
TXGLO1-VC-23-005	4.8	6.0	0.61	588.40	Hard
	7.5	5.0	0.51	490.33	Hard
	13.5	5.5	0.56	539.37	Hard
	16.5	3.5	0.36	343.23	Hard
TXGLO1-VC-23-006	No Torvane Conducted				
TXGLO1-VC-23-007	9.0	5.5	0.56	539.37	Hard
	15.1	1.5	0.15	147.10	Stiff
TXGLO1-VC-23-008	7.1	5.5	0.56	539.37	Hard
	8.1	9.0	0.92	882.60	Hard
	10.2	8.0	0.82	784.53	Hard
	16.0	8.0	0.82	784.53	Hard
TXGLO1-VC-23-009	No Torvane Conducted				
TXGLO1-VC-23-010	8.0	7.0	0.72	686.47	Hard
	10.0	8.5	0.87	833.57	Hard
	12.5	9.5	0.97	931.63	Hard
TXGLO1-VC-23-011	4.4	5.5	0.56	539.37	Hard
	16.0	6.5	0.67	637.43	Hard
TXGLO1-VC-23-012	0.8	0.0	0.00	0.00	Very Soft
	2.6	1.0	0.10	98.07	Stiff
TXGLO1-VC-23-013	3.0	2.5	0.26	245.17	Very Stiff
	6.4	3.0	0.31	294.20	Very Stiff
	13.7	8.0	0.82	784.53	Hard
TXGLO1-VC-23-014	0.8	0.0	0.00	0.00	Very Soft
	1.9	2.0	0.20	196.13	Very Stiff
	5.0	2.5	0.26	245.17	Very Stiff
	10.0	2.8	0.28	269.68	Very Stiff
	18.0	3.0	0.31	294.20	Very Stiff
TXGLO1-VC-23-015	No Torvane Conducted				
TXGLO1-VC-23-016	2.4	7.0	0.72	686.47	Hard
	5.5	7.5	0.77	735.50	Hard